

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BZE6-RQ

BZE6-RQ

M

DRAWING
NUMBER

12 X

ISSUE

REPLACES

RELEASE NO.

29AUG07

PSR

CHECK

77

SEP

2

CHECK

77

SEP

2

CHECK

77



AUG

30

J A L

RASTER
FO-52851-A

DRAWN

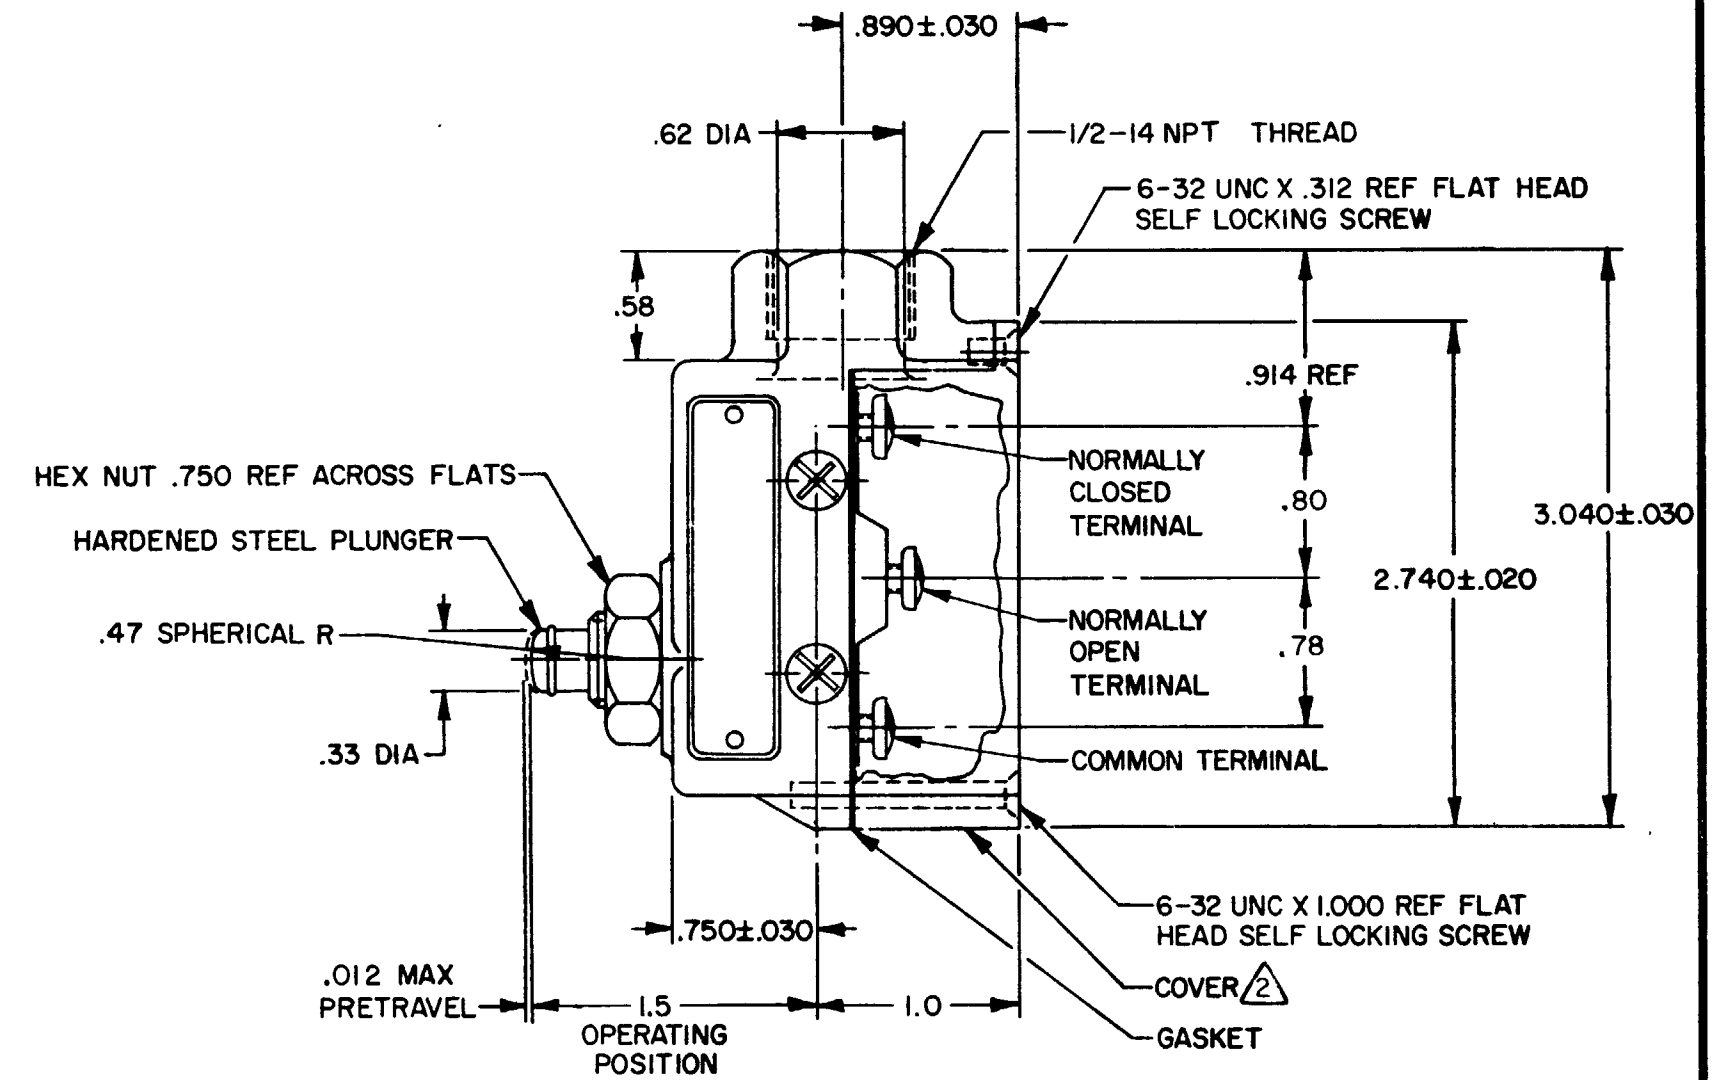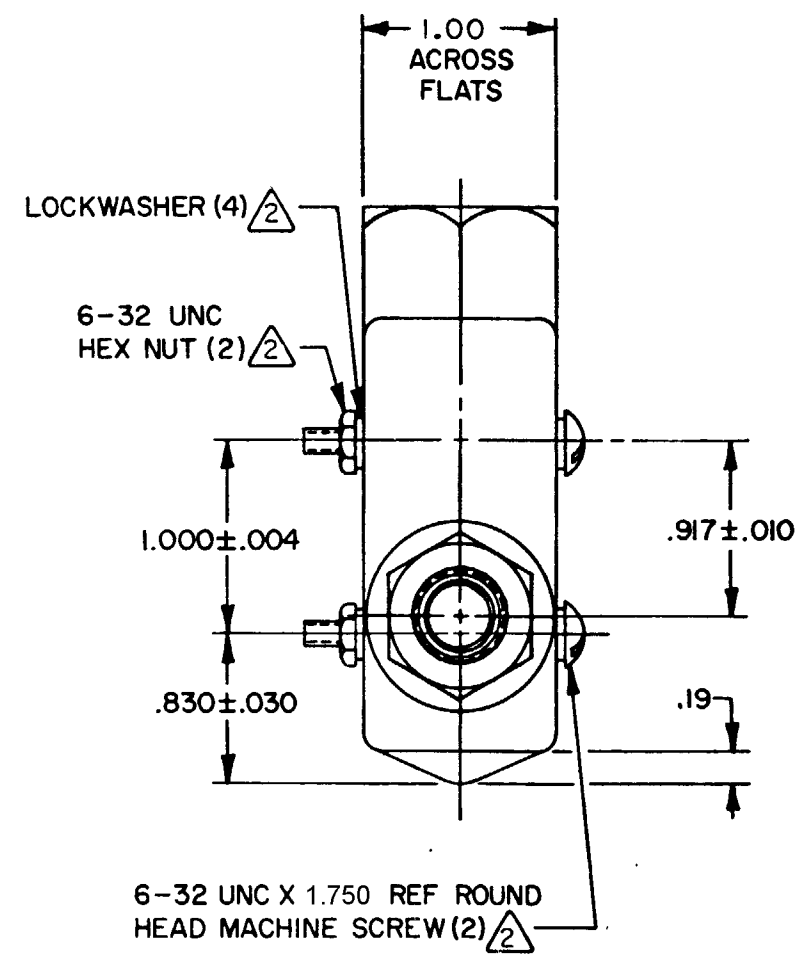

NOTES-

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
- ② FURNISHED UNASSEMBLED
- 3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 6-9 1/2 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN		UNLESS OTHERWISE NOTED
		DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .0005 MAX	CODE L103 15A-125, 250 OR 480 VAC, 1/8HP-125 VAC; 1/4HP-250 VAC	TOLERANCES ARE:
OVERTRAVEL ----- .219 MIN	CE 1.5A, 240 Vac	ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT ----- BZ-RQ66		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT .53 LB