


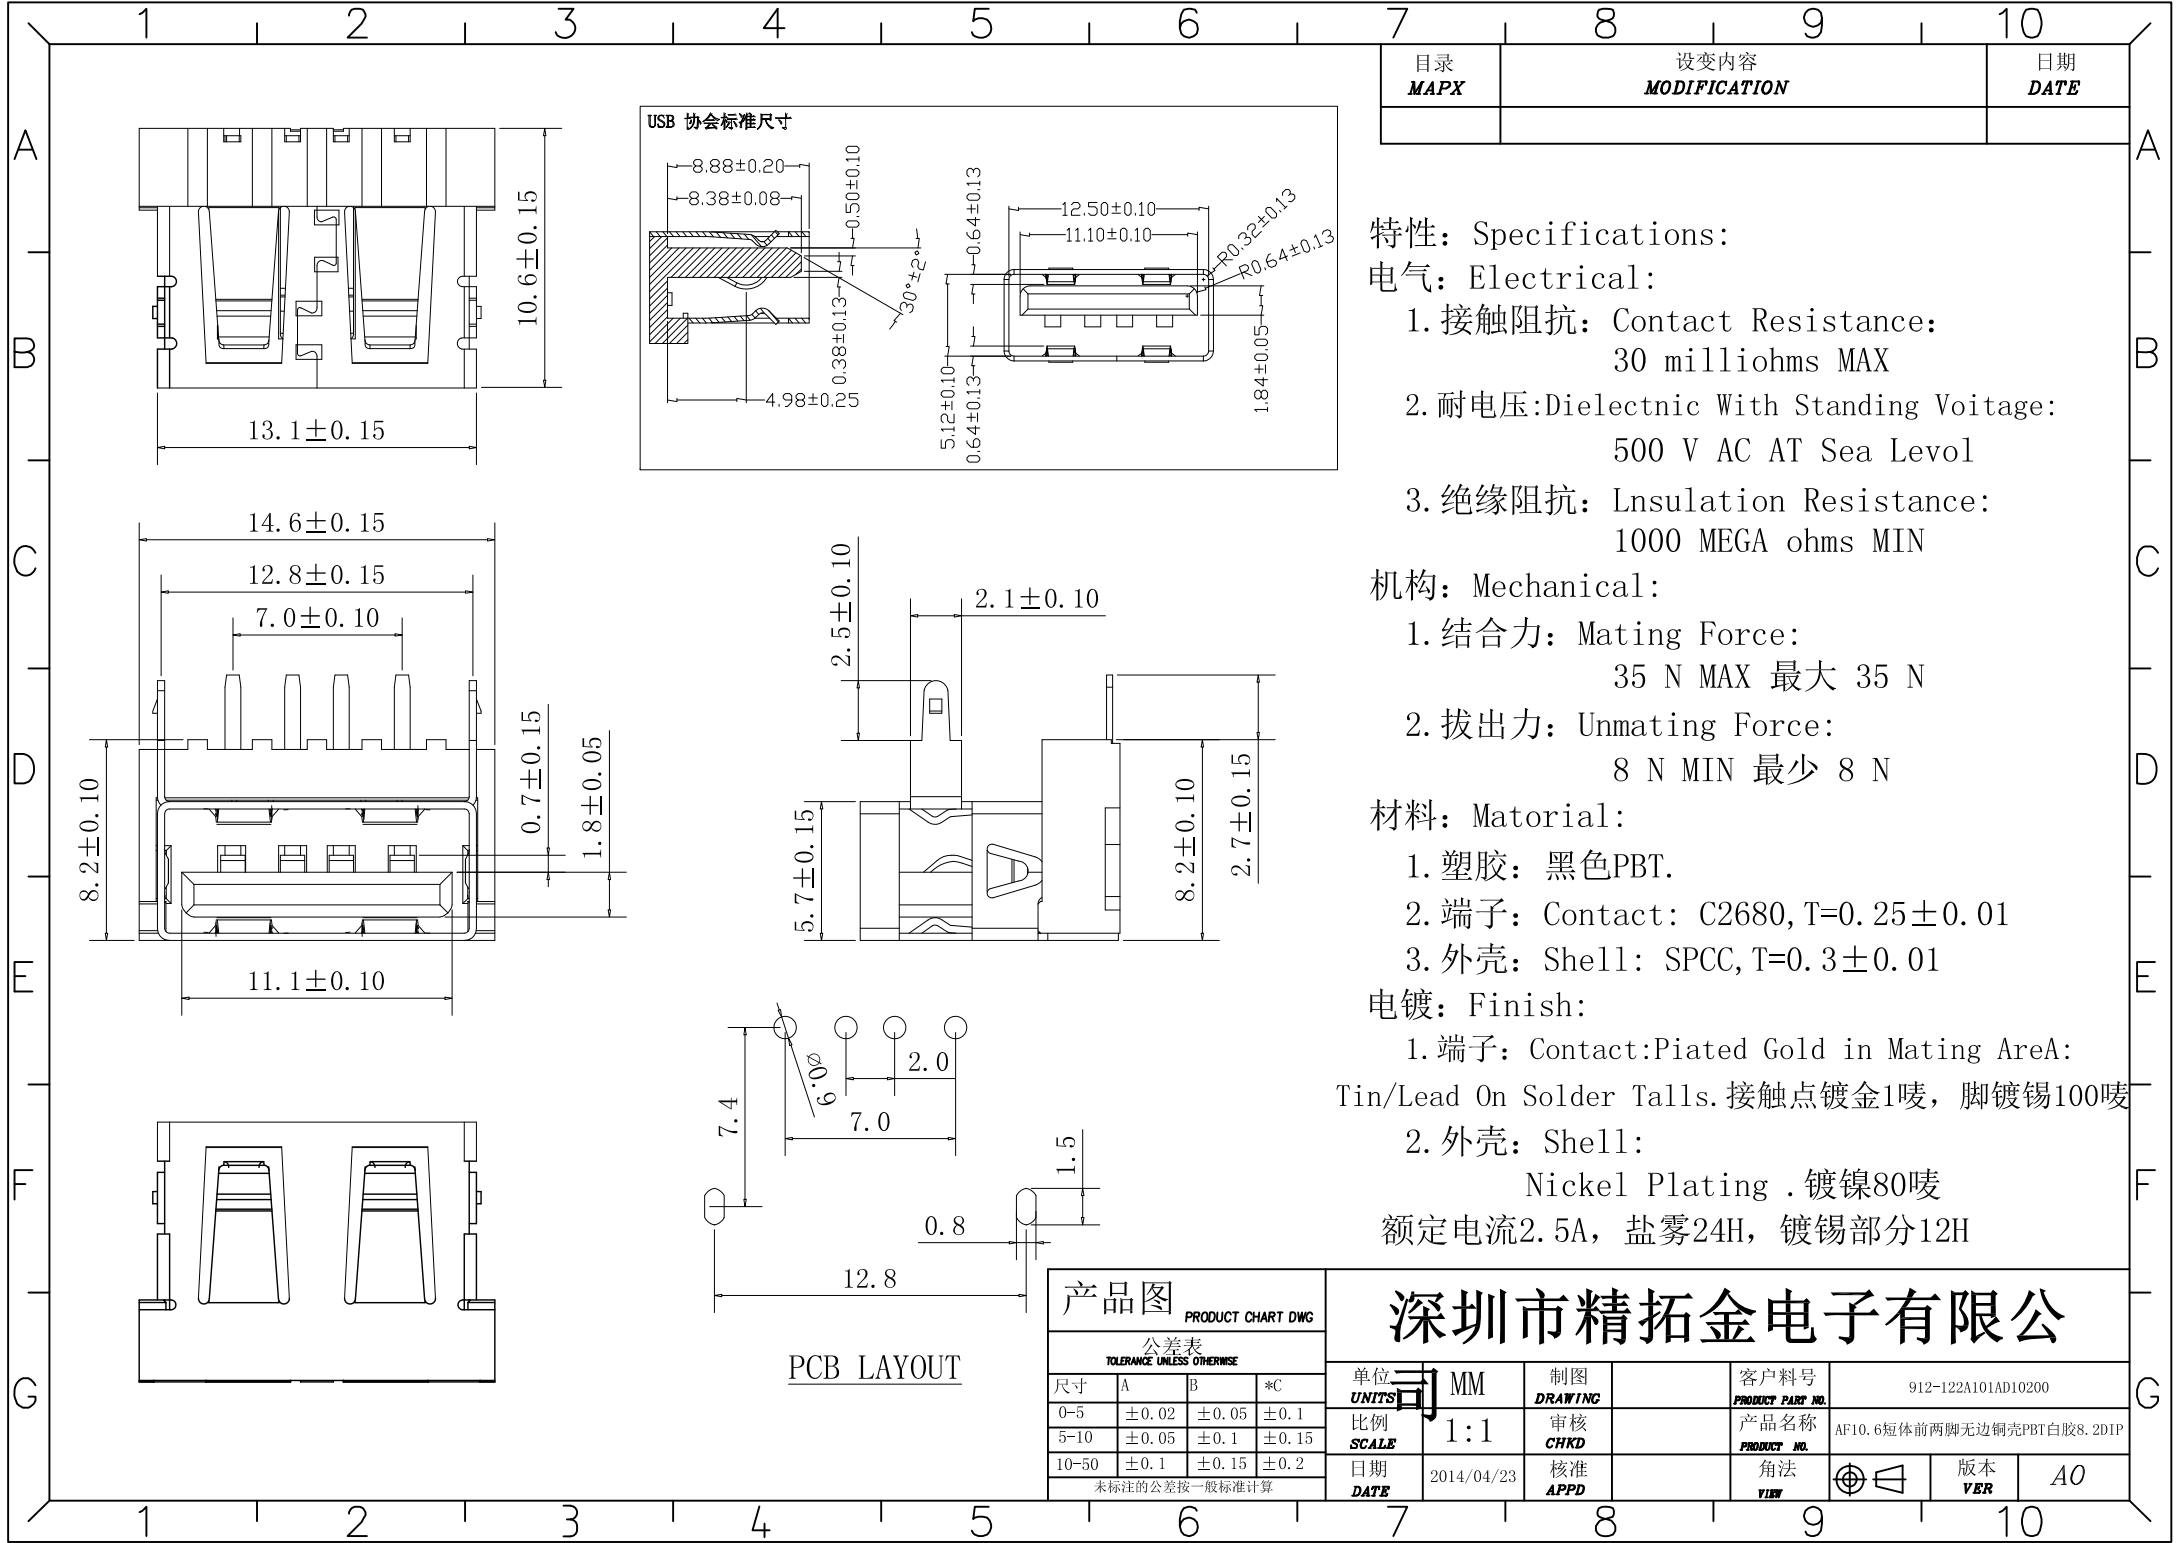

目录 MAPX	设变内容 MODIFICATION	日期 DATE

- 特性: Specifications:
- 电气: Electrical:
- 接触阻抗: Contact Resistance:
30 milliohms MAX
 - 耐电压: Dielectric With Standing Voitage:
500 V AC AT Sea Levot
 - 绝缘阻抗: Lnsulation Resistance:
1000 MEGA ohms MIN
- 机构: Mechanical:
- 结合力: Mating Force:
35 N MAX 最大 35 N
 - 拔出力: Unmating Force:
8 N MIN 最少 8 N
- 材料: Matorial:
- 塑胶: 黑色PBT.
 - 端子: Contact: C2680, T=0.25±0.01
 - 外壳: Shell: SPCC, T=0.3±0.01
- 电镀: Finish:
- 端子: Contact: Piated Gold in Mating AreA:
Tin/Lead On Solder Talls. 接触点镀金1唛, 脚镀锡100唛
 - 外壳: Shell:
Nickel Plating . 镀镍80唛
额定电流2.5A, 盐雾24H, 镀锡部分12H

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司			
公差表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	客户料号 PRODUCT PART NO.	912-122A101AD10200
尺寸	A B *C	MM		产品名称 PRODUCT NO.	AF10.6短体前两脚无边铜壳PBT白胶8.2DIP
0-5	±0.02 ±0.05 ±0.1	比例 SCALE	1:1	角法 VIEW	版本 VER
5-10	±0.05 ±0.1 ±0.15	日期 DATE	2014/04/23		A0
10-50	±0.1 ±0.15 ±0.2	核准 APPD			
未标注的公差按一般标准计算					