
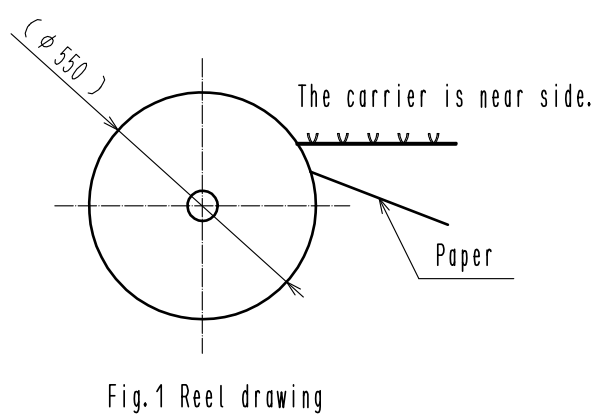
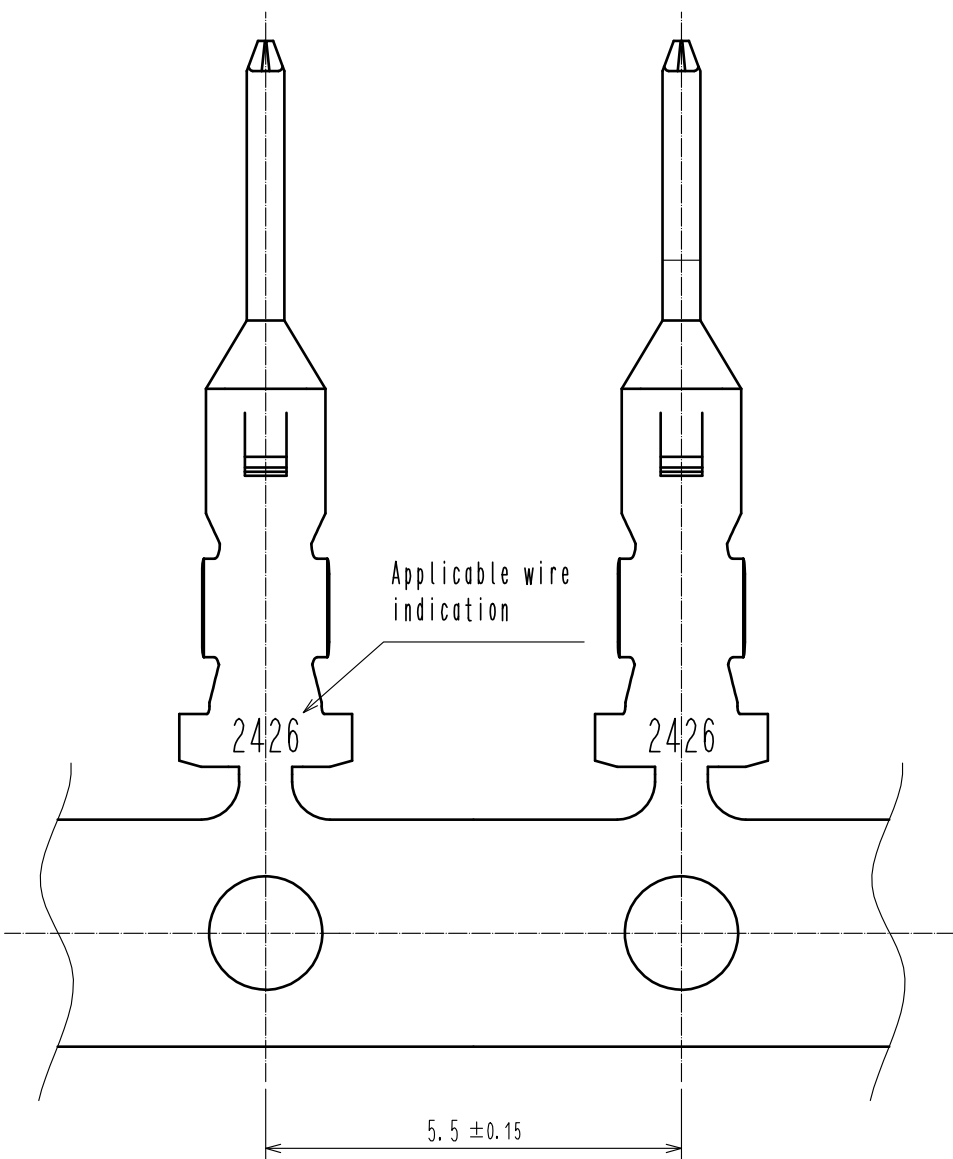


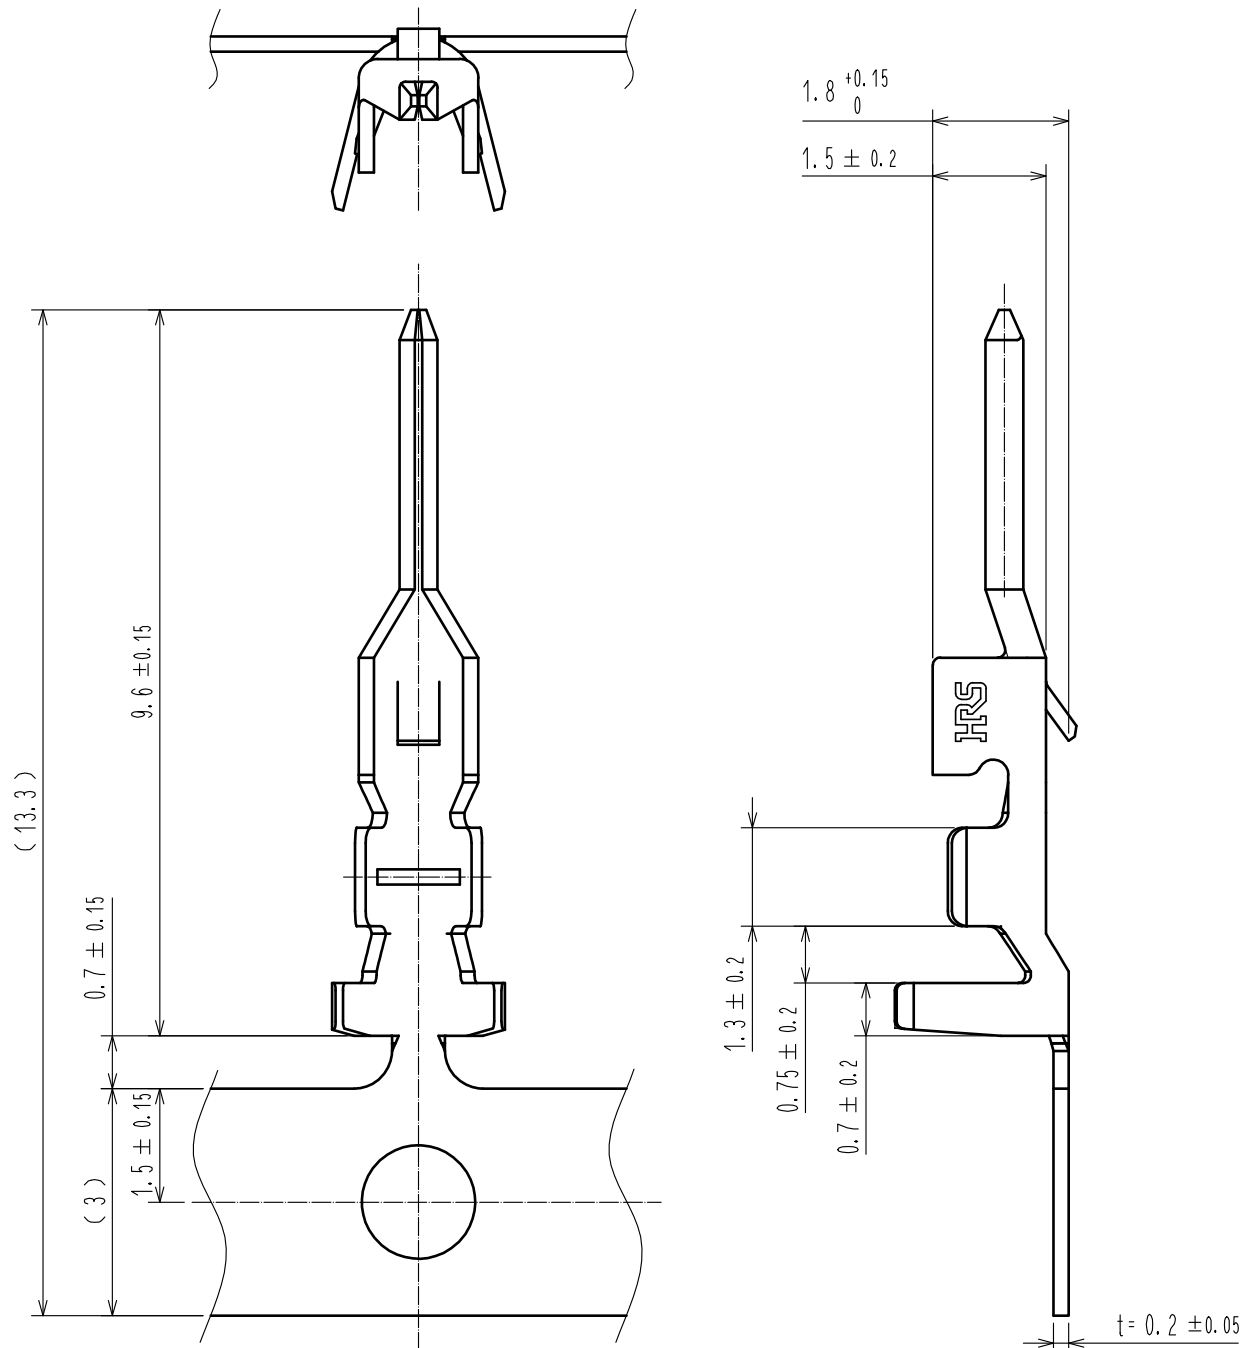

- Note:
1. Applicable wire is UL3266 AWG#24-#26.
Insulation diameter $\phi 1.49$ mm max.
 2. Per reel : 10000 contacts.
 3. Applicable crimping machine and crimping conditions (crimp height etc.)
will be specified according to AWG # or wire applied.
 4. Refer to ATAI-E3141 for crimp quality standards.

1	Copper alloy	Contact area : gold plating min. $0.2\mu\text{m}$ Terminal area : tin plating min. $0.5\mu\text{m}$ Others: nickel plating min. $0.5\mu\text{m}$
NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 10 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : AH. KODAMA		15.07.21	DRAWING NO. EDC-128586-00-00		
		CHECKED : AH. KODAMA		15.07.21	PART NO. MT50A-2426PCFA		
		DESIGNED : KI. KAGOTANI		15.07.21	CODE NO. CL248-0003-5-00		
		DRAWN : KI. KAGOTANI		15.07.21	 1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[MT50A-2426PCFA](#)