




[+ HARNESSING](#)
[HEAT SHRINK BOOTS](#)

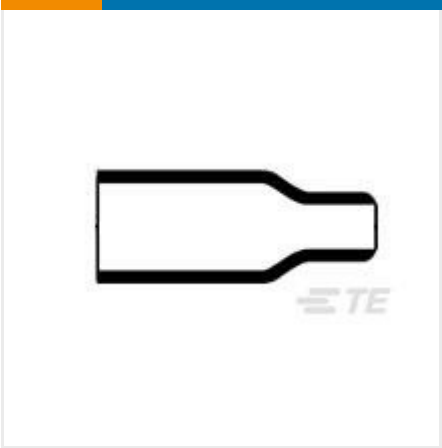

✓ Active

TE CONNECTIVITY (TE)
202A132-3/42-0
[Raychem](#) | [CAP](#) , [CRPS](#)

202A132-3/42-0
TE Internal Number: 814710-000
Alias ID: 3-1196346-1

[EU RoHS Compliant](#)
[EU ELV Compliant](#)

Lipped No

Operating Temperature Range (°C) -20 – 60

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options /42 Precoat, -20 – 60°C (-4 – 140°F)

Material Systems Code 10

[↓](#) **PRODUCT DRAWING**
English

DOCUMENTATION

Product Drawings

Boot, Straight, Overexpanded
PDF
English

Product Environmental Compliance

Safety Data Sheet

Aliphatic Polyamide Based Adhesives.
PDF
Dutch

Aliphatic Polyamide Based Adhesives.
PDF
English

Aliphatic Polyamide Based Adhesives.

PDF
French

Aliphatic Polyamide Based Adhesives.

PDF
German

Aliphatic Polyamide Based Adhesives.

PDF
Italian

Aliphatic Polyamide Based Adhesives.

PDF
Spanish

Aliphatic Polyamide Based Adhesives.

PDF
Swedish

Aliphatic Polyamide Based Adhesives.

PDF
English

EPS Heat Shrinkable Polymeric Products

PDF
French

EPS Heat Shrinkable Polymeric Products

PDF
Italian

EPS Heat Shrinkable Polymeric Products

PDF
Dutch

EPS Heat Shrinkable Polymeric Products

PDF
Danish

EPS Heat Shrinkable Polymeric Products

PDF
English

EPS Heat Shrinkable Polymeric Products

PDF
German

EPS Heat Shrinkable Polymeric Products

PDF
Norwegian

EPS Heat Shrinkable Polymeric Products

PDF
Spanish

EPS Heat Shrinkable Polymeric Products

PDF
Swedish



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped No

Body Features

Material Systems Code 10

Adhesive Pre-Coat Yes

Material Modified Polyolefin

Dimensions

Cable Diameter Range 6.6 – 20.3 mm [.26 – .8 in]

Wire/Cable Outside Diameter .3 in, .31 in, .35 in, .39 in, .43 in, .433 in, .47 in, 10 mm, 11 mm, 12 mm, 8 mm, 9 mm

Usage Conditions

Operating Temperature Range (°C) -20 – 60

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Approved Standards BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS I 81765/1, Type I, UL 224, File E85381

Other

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options /42 Precoat, -20 – 60°C (-4 – 140°F)

Adhesive Type General Purpose Pre-Coat Adhesive

Statement of Compliance

Statement of Compliance

PDF