
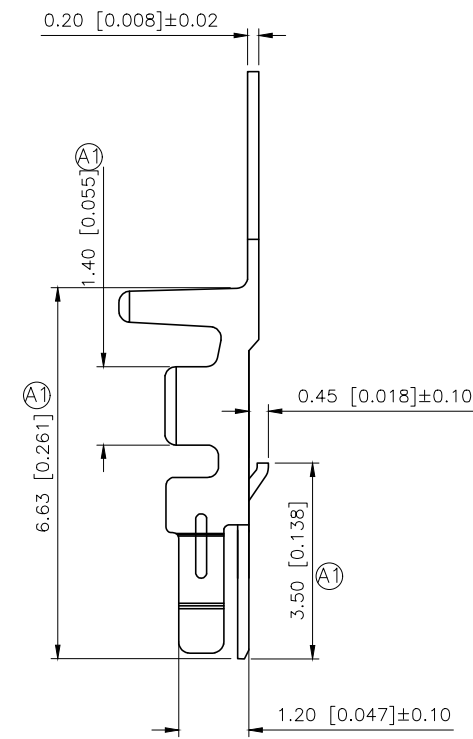


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X9	产品结构及尺寸变更, 图面升级整理图面	2025.07.16	阿树

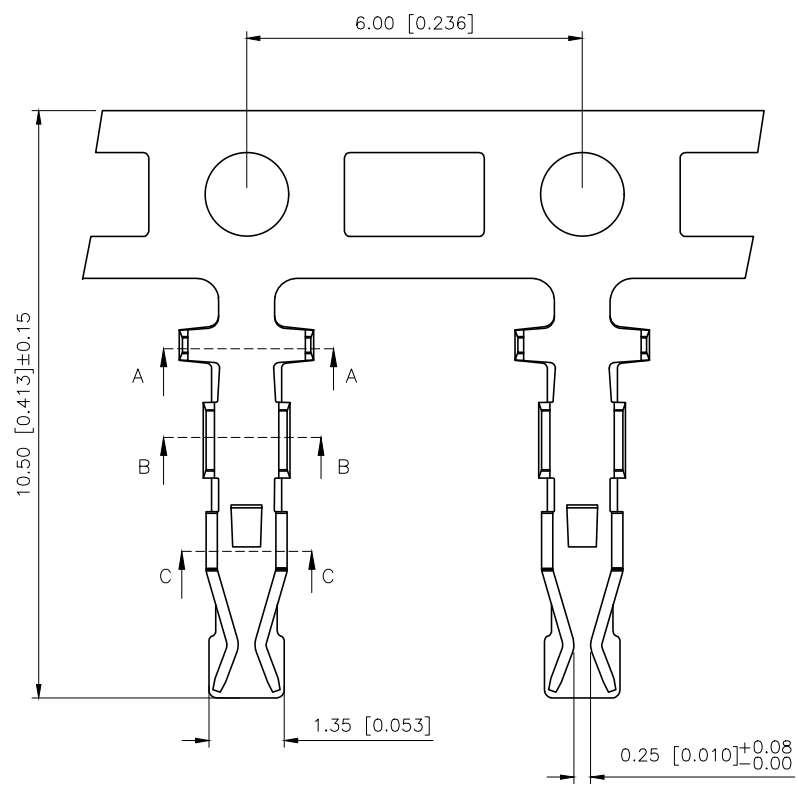


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ


PART NO.:

X2026 T-P SN-B
① ② ③ ④ ⑤


- ①Series Number.
②Category: T-terminal
③Material: P-Phosphor bronze
④Plating Category:SN-Bright Tin Plating
⑤Special No:B-With Lock In the middle



Section:A-A



Section:B-B



Section:C-C

X2026T-PSN-B	Phosphor Bronze	AWG#24-28	1.4mm(Max)	Plating Before Stamping: 10u"Ni;40~60u"Sn	X2026H-B
PART NO	Material	Wire Range	Insulation OD	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE: 2.00mm Crimp Style Connector
PART NO.: X2026T-PSN-B
DWG NO.: