


接触电阻: 80mΩ Max

9.Plating:V01-Gold Flash

|                                               |             |      |         |          |                        |      |
|-----------------------------------------------|-------------|------|---------|----------|------------------------|------|
|                                               |             |      |         |          | ANGLAR                 | ±5°  |
| ΔX                                            |             |      |         |          | L ≤ 4                  | ±0.2 |
| ΔX                                            |             |      |         |          | 4 < L ≤ 16             | ±0.3 |
| ΔX                                            |             |      |         |          | 16 < L ≤ 63            | ±0.4 |
| MARK                                          | DESCRIPTION | DATE | REVISED | APPROVED | L > 63                 | ±0.5 |
| REVISIONS                                     |             |      |         |          | UNSPECIFIED TOLERANCES |      |
| www.helloxkb.com www.helloxkb.cn www.xk-dg.cn |             |      |         |          |                        |      |

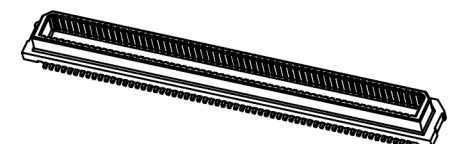

# XKLE

XKB INDUSTRIAL PRECISION CO.,LIMITED