


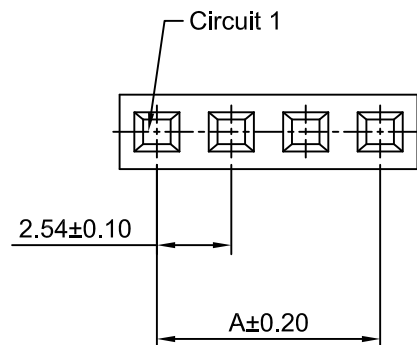

Ordering Information:

A2547H-XP - ***
1 2

1.Part NO.

2.Material:

(blank): PBT,UL94V-0




GWT: Nylon 66,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2547H-2P-2	2.54	5.08
A2547H-3P-2	5.08	7.62
A2547H-4P-2	7.62	10.16
A2547H-5P-2	10.16	12.70
A2547H-6P-2	12.70	15.24
A2547H-7P-2	15.24	17.78
A2547H-8P-2	17.78	20.32
A2547H-9P-2	20.32	22.86
A2547H-10P-2	22.86	25.40
A2547H-11P-2	25.40	27.94
A2547H-12P-2	27.94	30.48
A2547H-13P-2	30.48	33.02
A2547H-14P-2	33.02	35.56
A2547H-15P-2	35.56	38.10
A2547H-16P-2	38.10	40.64
A2547H-17P-2	40.64	43.18
A2547H-18P-2	43.18	45.72
A2547H-19P-2	45.72	48.26
A2547H-20P-2	48.26	50.80
A2547H-21P-2	50.80	53.34
A2547H-22P-2	53.34	55.88
A2547H-23P-2	55.88	58.42
A2547H-24P-2	58.42	60.96
A2547H-25P-2	60.96	63.50

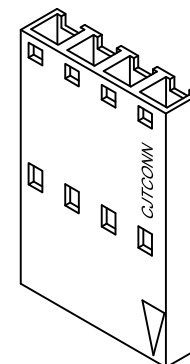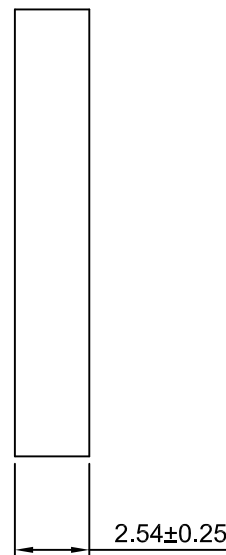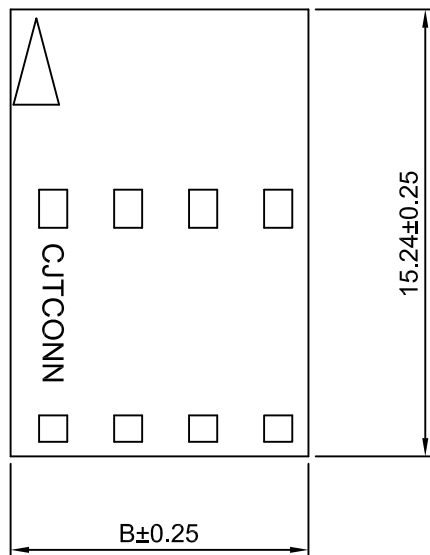

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 1	2.54mm PITCH HOUSING
DRWN	CHK'D	APPR	
Dengchun Yi	Dlankul Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			A2547H-XP-2
			REV A1