
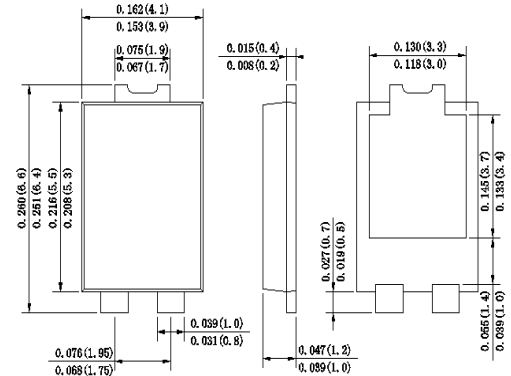


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ Trench MOS Schottky barrier diodes
- ◆ Low forward voltage drop
- ◆ low profile - typical body height 1.1 mm
- ◆ Moisture sensitivity: level 1, per J-STD-020
- ◆ High temperature soldering guaranteed:
260 °C/10 seconds - RoHS Compliant
- ◆ Halogen-free according to IEC 61249-2-21 definition

TO-277


Dimensions in inches and (millimeters)

Mechanical Data

Case : JEDEC TO-277 Molded plastic body
Case Material: Molding compound meets UL 94V-0 flammability rating
Terminals :Plated Leads Solderable per MIL-STD-202,Method 208
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.003 ounce, 0.092 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	SYMBOL	MDD ST10100	UNIT
Marking Code			
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum DC blocking voltage	V_{DC}		
RMS Reverse voltage	V_{RMS}	70	V
Average Rectified Output Current	$I_{(O)}$	10	A
Non-Repetitive Peak Forward Surge8.3ms Single Half Sine-Wave Superimposed on rated load(JEDEC Method)	I_{FSM}	240	A

Electrical Characteristics Ta=25°C unless otherwise noted

Parameter	Test Conditions	Symbol	Value		Unit
			Typ	Max	
Forward Voltage Drop at 10A	TA=25°C	V_F	0.60	0.65	V
	TA=125°C		0.54	0.59	
Peak reverse curent at rated DC blocking voltage	TA=25°C	I_R	25	70	uA
	TA=125°C		10	50	mA
Typical junction capacitance	4.0 V, 1 MHz	C_J	240		PF
Typical thermal resistance Junctionto Ambient		$R_{\theta JA}$	102		°C/W
Operating junction and storage temperaturerange		T_J, T_{STG}	-55 to +150		°C

Note:1.The typical data above is for referenceonly.

Ratings And Characteristic Curves

FIG.1: Forward Output Current Derating Curve

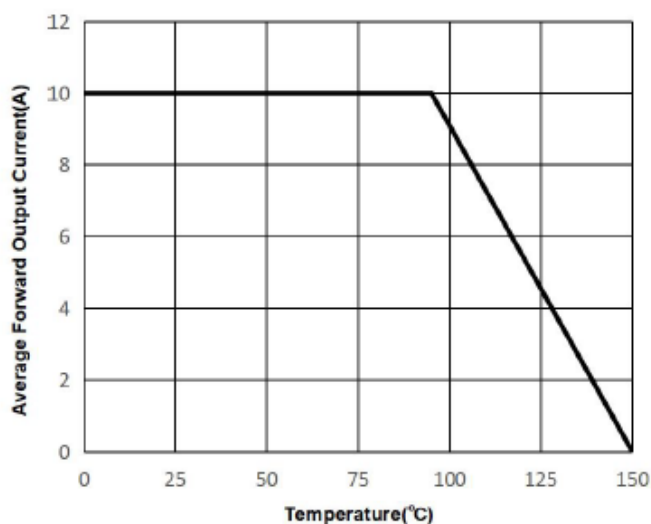


FIG.2: Maximum Non-Repetitive Peak Forward Surge Current

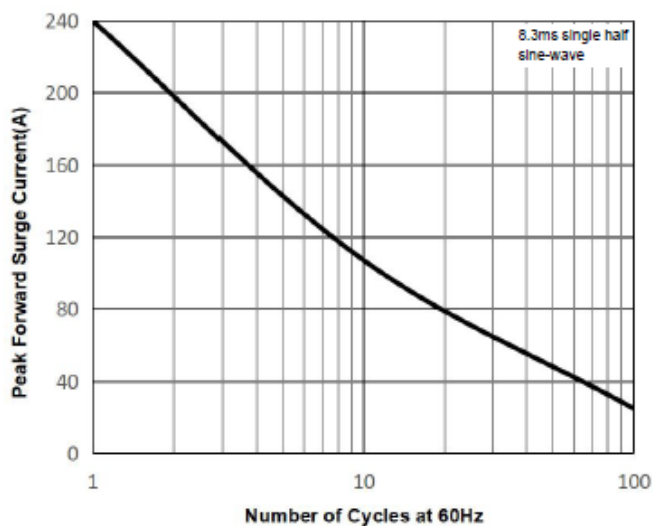


FIG.3: Typical Forward Characteristics



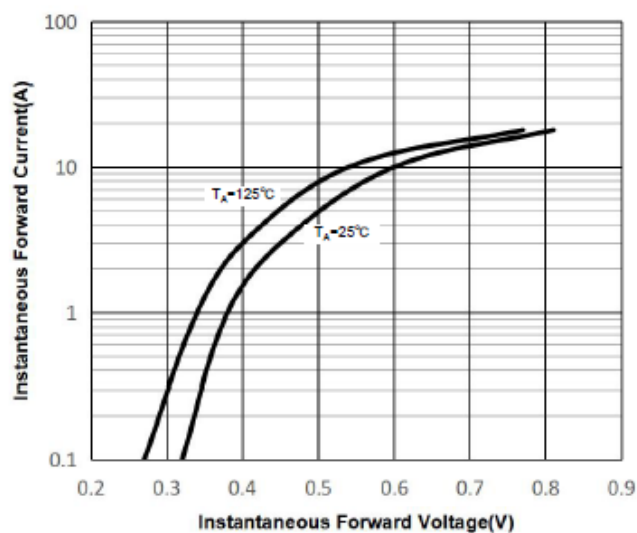


FIG.4: Typical Reverse Characteristics

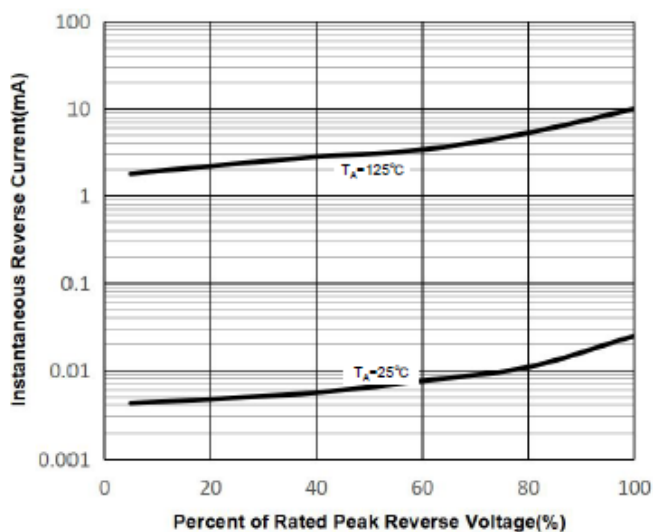

The curve above is for reference only.

Packing information

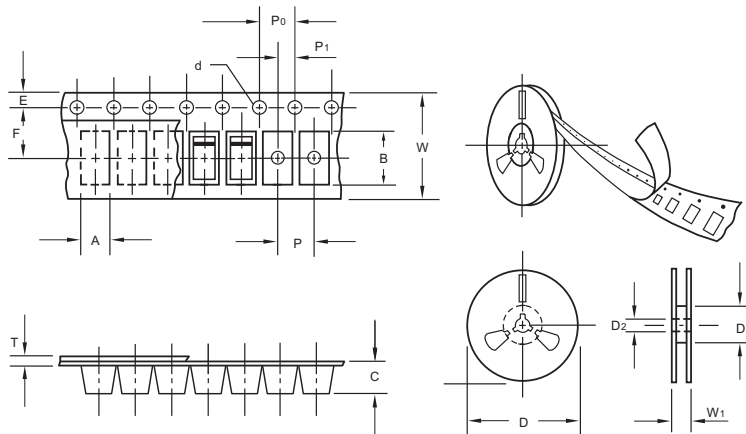

unit:mm


Item	Symbol	Tolerance	TO-277
Carrier width	A	0.1	4.45
Carrier length	B	0.1	7.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	50.0
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	7.50
Punch hole pitch	P	0.1	8.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	12.00
Reel width	W1	1.0	12.30

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
TO-277	13"	5,000	4.0	10,000	210*208*203	330	430*430*235	80,000	13.0

Suggested Pad Layout

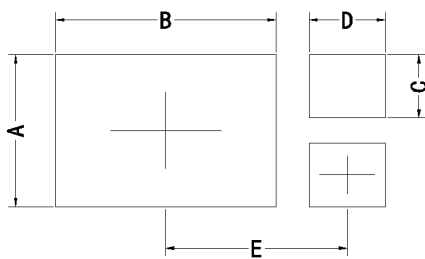

Symbol	Unit (mm)	Unit (inch)
A	3.60	0.142
B	5.35	0.211
C	1.50	0.059
D	1.85	0.073
E	4.30	0.169