
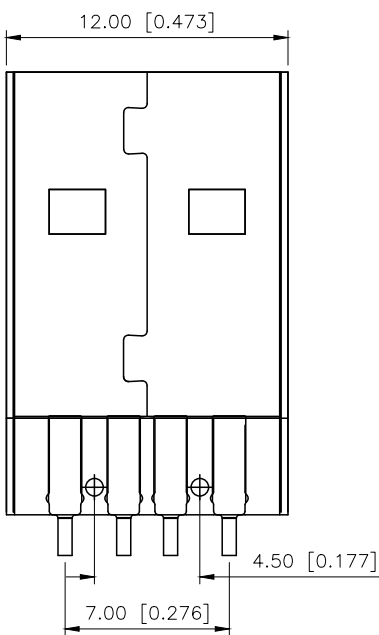


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.06	阿树

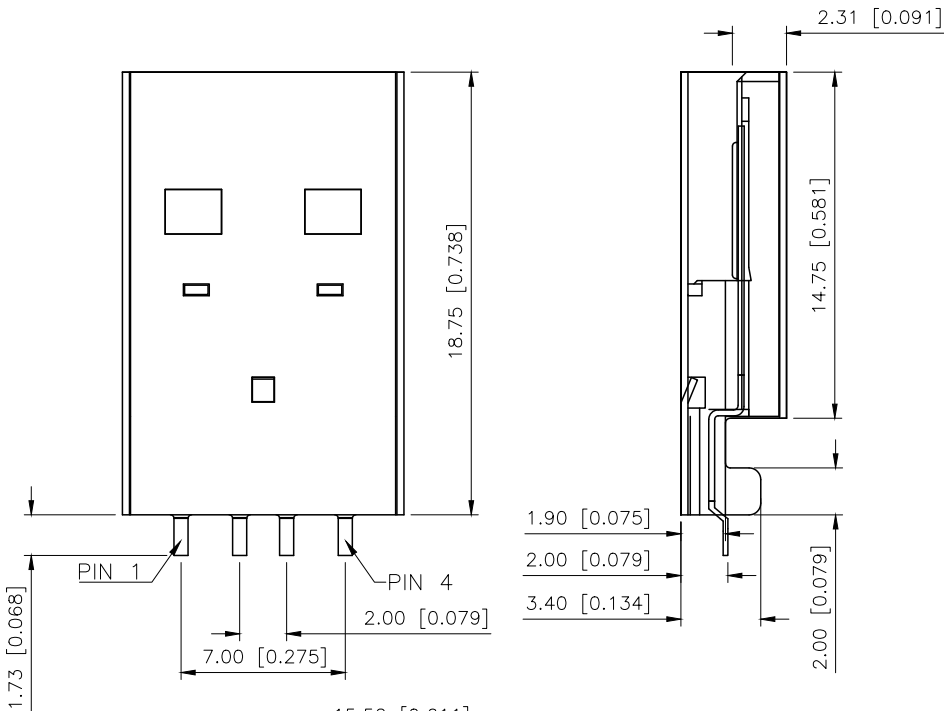

规格型号:Specifications:

电气特性:Electrical:

- 1.额定电流:Current Rating
1.5A/contact terminal
- 2.额定电压:Voltage Rating 30V DC
- 3.接触阻抗:50 mΩ Max
- 4.耐电压:500V AC 1M
- 5.绝缘阻抗:1000 MΩ MINI 300 V/AC

2.环境性能 Environmental performance

A.操作温度-40°C TO 85°C


3.物理性能:Mechanical:

插拔力 Insertion force:Connector Mate and Unmate Force
Mate force:3.5kgf(MAX)
Unmate force:1.0kgf(MIN)

原材料:Material:


- 1.塑胶:Housing:
Hing Temperature Tnermaplastics,
LCP Black
- 2.端子:Contact:Copper Alloy C2680
- 3.外壳:Shel:Copper Alloy SPCC

PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND

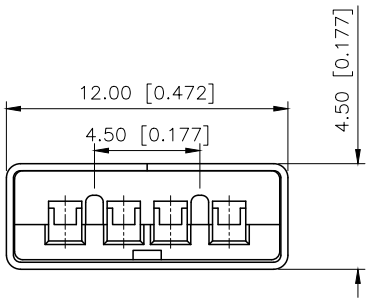

U217-04XN-4BV83

1:1u"
2:5u"
3:10u"
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

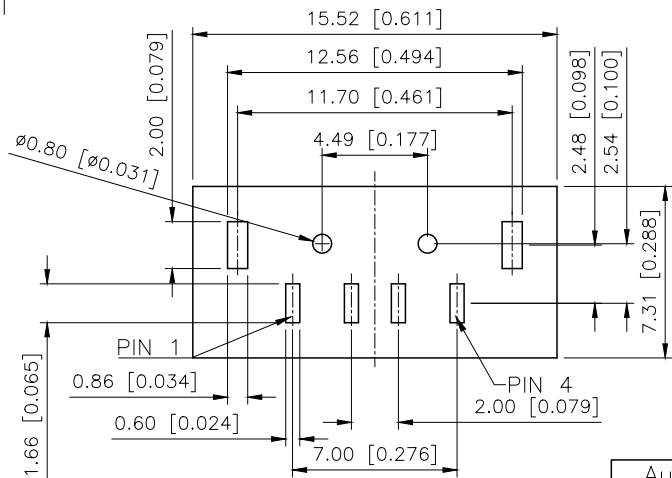

PCB LAYOUT

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: USB 2.0
CHECKED		UNIT: mm/in	PART NO.: U217-04XN-4BV83
APPROVED		SIZE: A4	DWG NO.: