

Ordering Information:

A2508HMA-XP - *** _ ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:





(Blank): see section 2 Material

BK: Black

BL: Blue

GN: Green

RD: Red

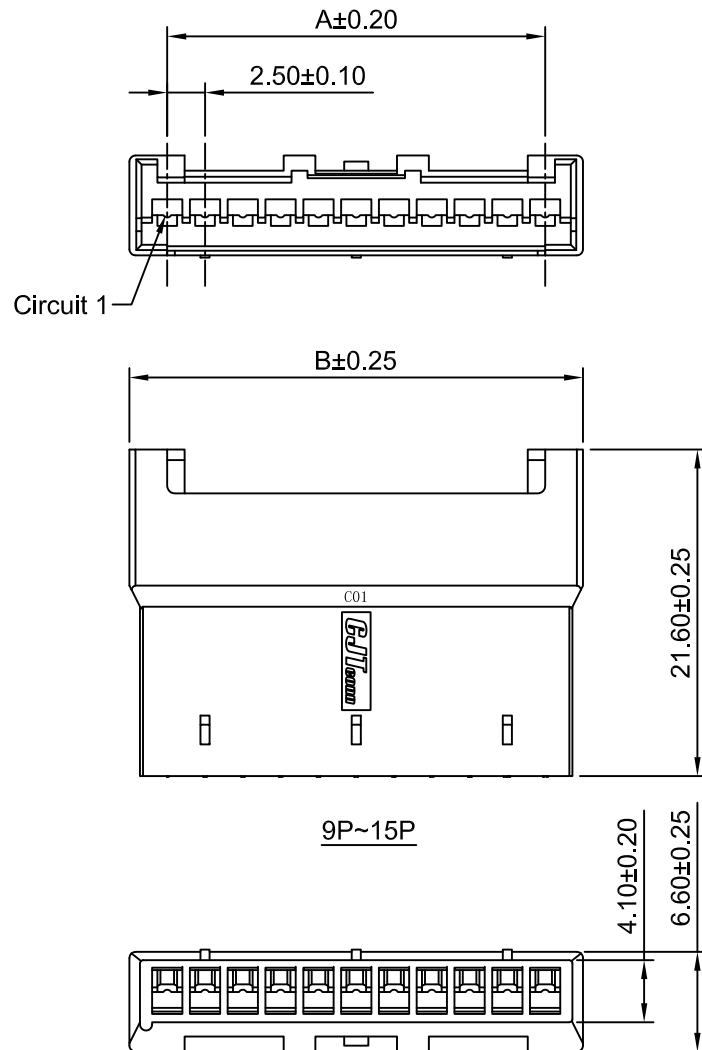

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508HMA-2P	2.50	7.50
A2508HMA-3P	5.00	10.00
A2508HMA-4P	7.50	12.50
A2508HMA-5P	10.00	15.00
A2508HMA-6P	12.50	17.50
A2508HMA-7P	15.00	20.00
A2508HMA-8P	17.50	22.50
A2508HMA-9P	20.00	25.00
A2508HMA-10P	22.50	27.50
A2508HMA-11P	25.00	30.00
A2508HMA-12P	27.50	32.50
A2508HMA-13P	30.00	35.00
A2508HMA-14P	32.50	37.50
A2508HMA-15P	35.00	40.00

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	2.50mm PITCH HOUSING
General Tolerances			
THIRD ANGLE PROJECTION			DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2508HMA-XP
A1 MODIFY DRAWING 2022.07.08 A0 NEW RELEASE 2021.11.17 REV DESCRIPTION DATE			REV A1