
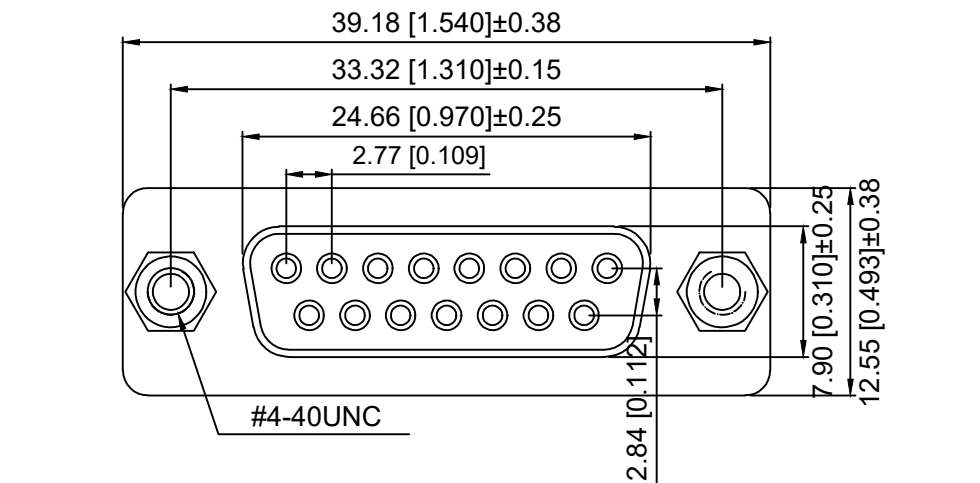
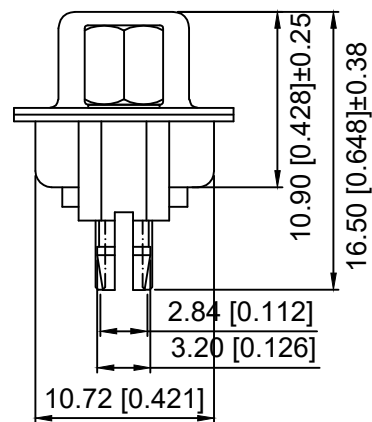


PCB LAYOUT

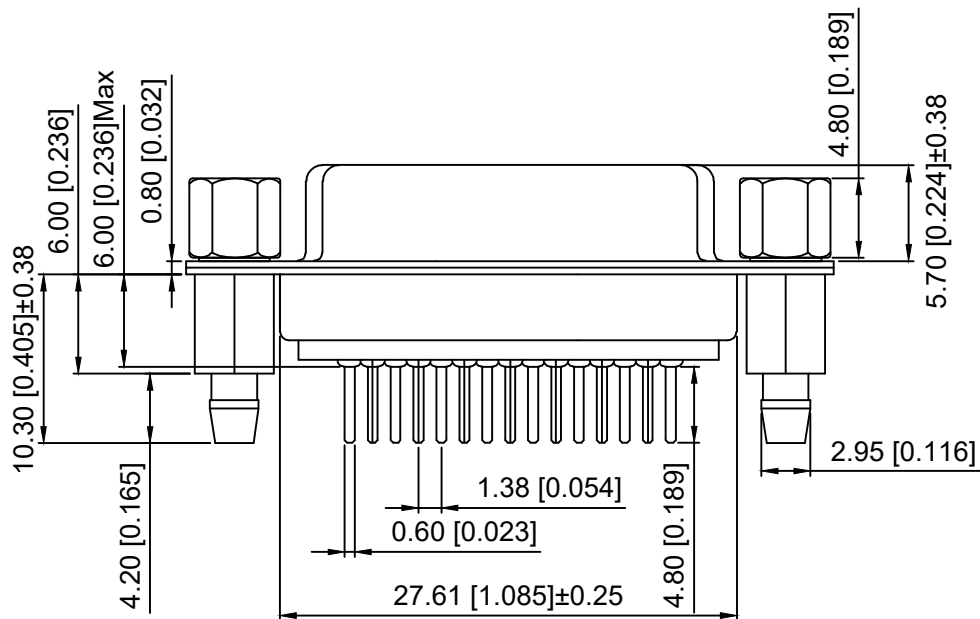

Specifications:

规格:

- 1.Voltage rating:250VAC/DC
额定电压: 250V AC/DC
- 2.Current rating:3A AC/DC
额定电流:3A AC/DC
- 3.Withstanding voltage:1000V AC/minute
耐受电压: ≥1000V AC/分钟
- 4.Temperature range: -25℃-+80℃
温度范围: -25℃-+80℃
- 5.Insulation resistance:5000MΩMIN
绝缘电阻: ≥5000MΩ
- 6.Contact resistance:30mΩMax
接触电阻: ≥30mΩ

Material:

材料:

- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - 8.The iron shell:SPCC Terminal half-Gold 15u Matte Tin
铁壳: SPCC 半金15u雾锡
- B、成品不能有弯针，R角不一致等不良。

X02 15 F T 17 B X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series N0.
- ② Row No.Pin No.XX-15;
- ③ Welding Board Angle :F-Female
- ④ T: Traditional
- ⑤ Planting Catogtry: 17-Terminal half-Gold 15u Matte Tin
- ⑥ Color:B-BLACK
- ⑦ 5:TYPE-5; 7:TYPE-7

铆合方式	TYPE-7:后铆鱼叉	TYPE-5:铆鱼叉锁螺丝
图示		

							DSND		SCALE: N/A	MODEL TYPE: D-USB		
ΔX					ANGLAR	±5°		DWN		VIEW: 	PART NO.: X0215FT17BX	
ΔX					4<L≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.: X-X0215FT17BX	
ΔX					16<L≤ 63	±0.4		APPD		SIZE: A4		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5						
REVISIONS							UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO.,LIMITED		
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn										WEIGHT	SHEET 1/1	REVISION A0

XKB