
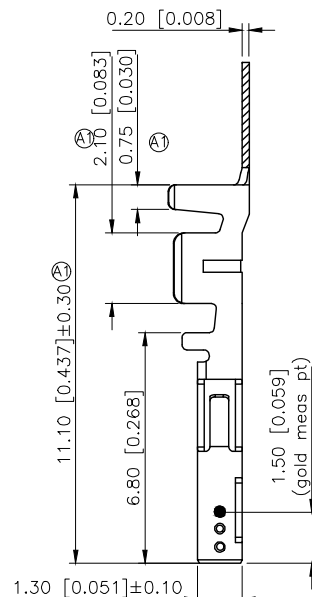


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	①X8	产品尺寸及外观变更, 图框升级整理图面	2025.06.11	阿树

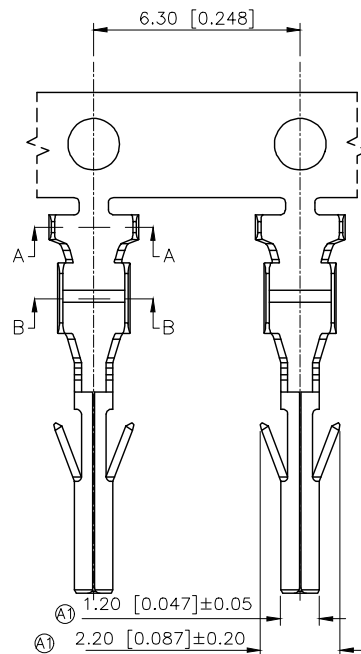



■Specifications

- Voltage rating:250V AC,DC
- Current rating:5A AC,DC
- Withstanding voltage:1500V AC/minute
- Temperature range:−45° to+125°
- Insulation resistance:≥1000MΩ Min
- Contact resistance:≤20mΩ Max

PART NO.:

X3025 I F P XX
① ②③ ④ ⑤

- ①Series Number.
②Category: T—terminal
③Category:F—Female Terminal
④Material: P—Phosphor Bronze
⑤Plating Category:SN—Bright tin plating



X3025TF-PSN	Phosphor Bronze	AWG#22-24	X3025HM
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 3.00mm Crimp Style Connectors		
CHECKED		UNIT: mm/in	PART NO.: X3025TF-PSN		
APPROVED		SIZE: A4	DWG NO.:		
PRECISION CO.,LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED