
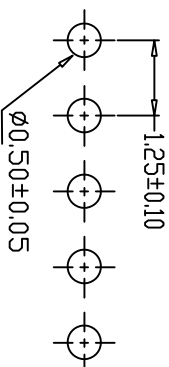
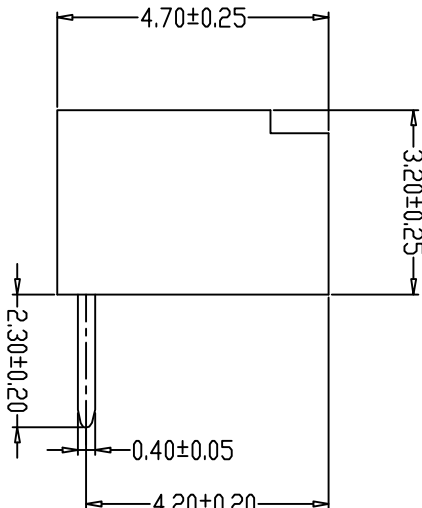


版本 1.0	变更履历 CHANGE HISTORY	变更日期 DATE
-----------	------------------------	--------------

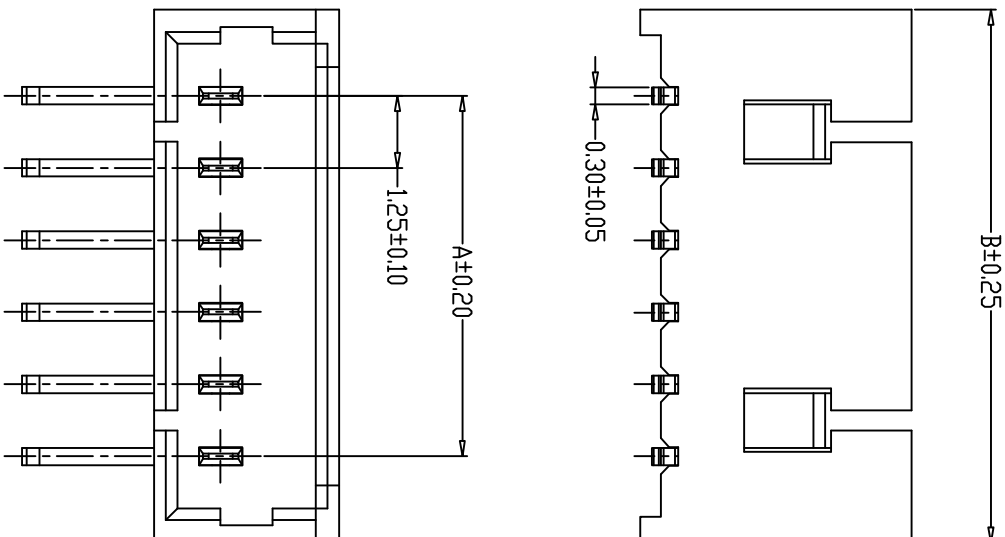

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100mΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Wafer Nylon46, UL94V-0
PIN Phosphoric copper Tin-plated

编 号	尺寸 (mm)	
	A	B
A1251WR-02A	1.25	4.25
A1251WR-03A	2.50	5.50
A1251WR-04A	3.75	6.75
A1251WR-05A	5.00	8.00
A1251WR-06A	6.25	9.25
A1251WR-07A	7.50	10.50
A1251WR-08A	8.75	11.75
A1251WR-09A	10.00	13.00
A1251WR-10A	11.25	14.25
A1251WR-11A	12.50	15.50
A1251WR-12A	13.75	16.75
A1251WR-15A	17.50	20.50

单位 UNIT	mm	深圳市泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>		
比例 SCALE		版本: A0	产品名称 Product Name	1.25开口弯针座
X. ±0.5	X. ±	审核: CHECKED BY	产品料号 Product No	TH-A1251WR-NA
.X ±0.30	.X ±	制图: DRAWN BY	客户料号 Client No	
.XX ±0.20	.XX ±	封文辉 2022.8.31	日期:	
.XXX ±0.005, XXX ±	.XXX ±			