
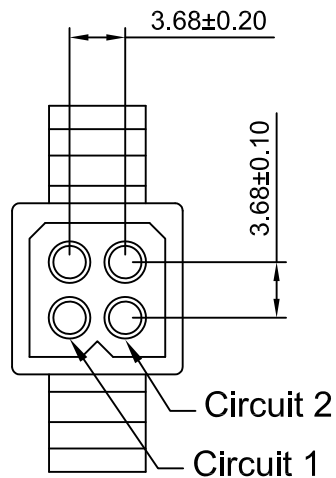
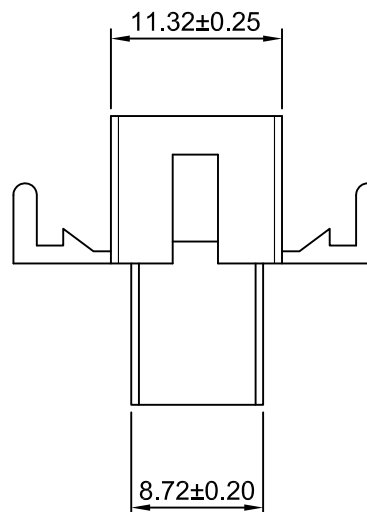


Panel hole layout

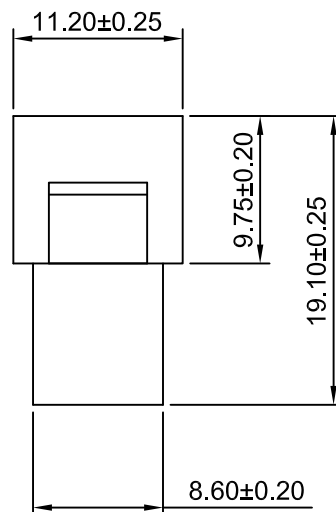

Ordering Information:

C1581HMB-2x2P - **
1 2

1.Part No.

2.Material:

(blank):UL94V-2/Natural

V0:UL94V-0/White

SPECIFICATIONS:

Current Rating:5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

x.x±0.25	PROJECT ⊕
x.xx±0.20	
x.xxx±0.15	

Title :
3.68mm PITCH
HOUSING

DRAW NO : C1581HMB-2x2P	REV A0
-------------------------	--------

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2015.04.20