




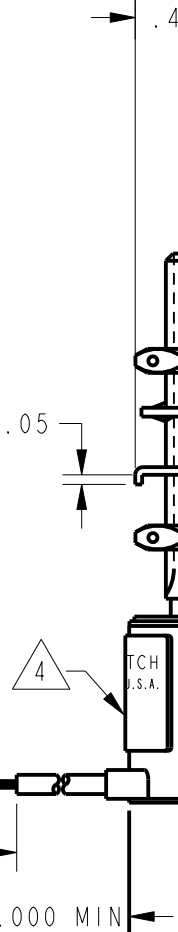


6X NO.20 WIRE LEAD PER MIL-W-22759/7
MARKED WITH CIRCUIT IDENTIFICATION AND W
(1-20, 2-20 ETC) PER MIL-W-5088

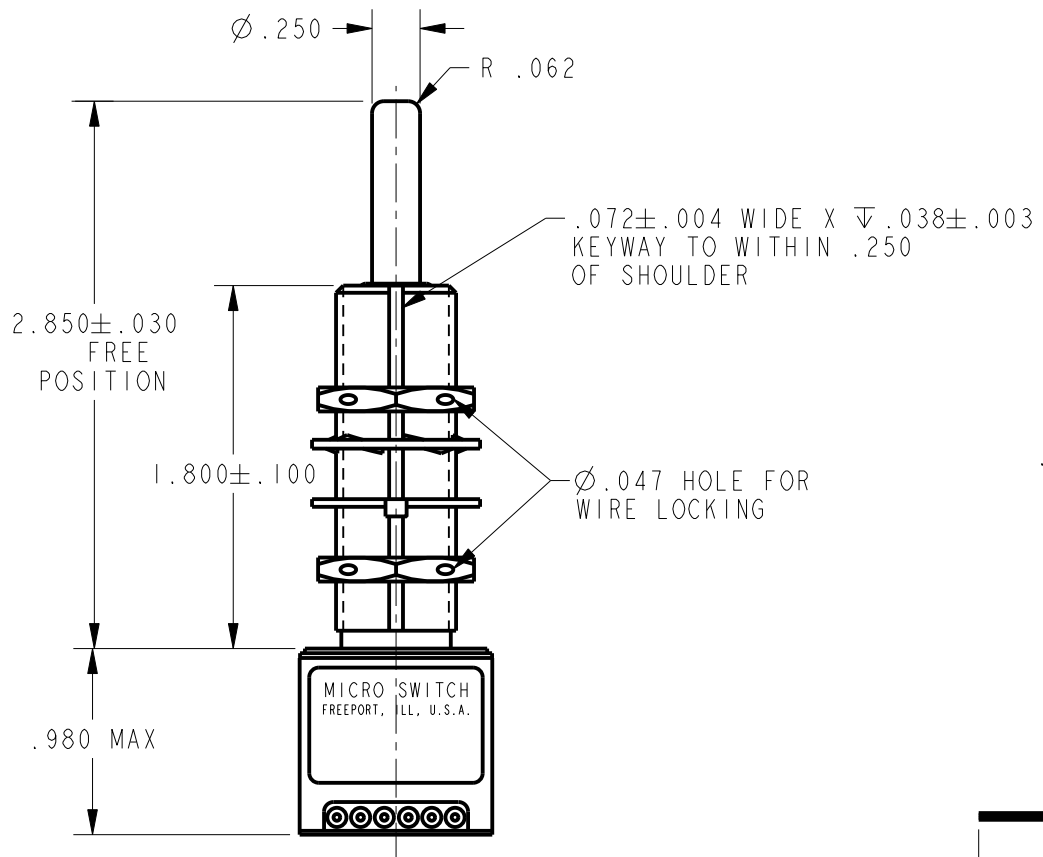

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE	6-12 LB
FULL OVERTRAVEL FORCE	20 LB MAX
RELEASE FORCE	4 LB MIN
PRETRAVEL	.015-.040
DIFFERENTIAL TRAVEL	.020 MAX
TOTAL TRAVEL	.900 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
2X S P D T

LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	4	4
IND	2	2
MOTOR	4	

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	±
TWO PLACE	(.00)	±
THREE PLACE	(.000)	±
ANGLES		±

WEIGHT 8.5 OZ MAX

1EN289-3

CATALOG LISTING



ISSUE 17

REVISIONS

A	201512	TSM	1 NOV 00
B	0006608	KR	21 JUL 04

REPLACES -

RELEASE NO. PR-19900

PAGE 1 OF 1

CHECK

21 JUL 04

AK

CHECK

1 NOV 00

SAV

CHECK

1 NOV 00

TSM

PTC/CAD 2D

DRAWN