


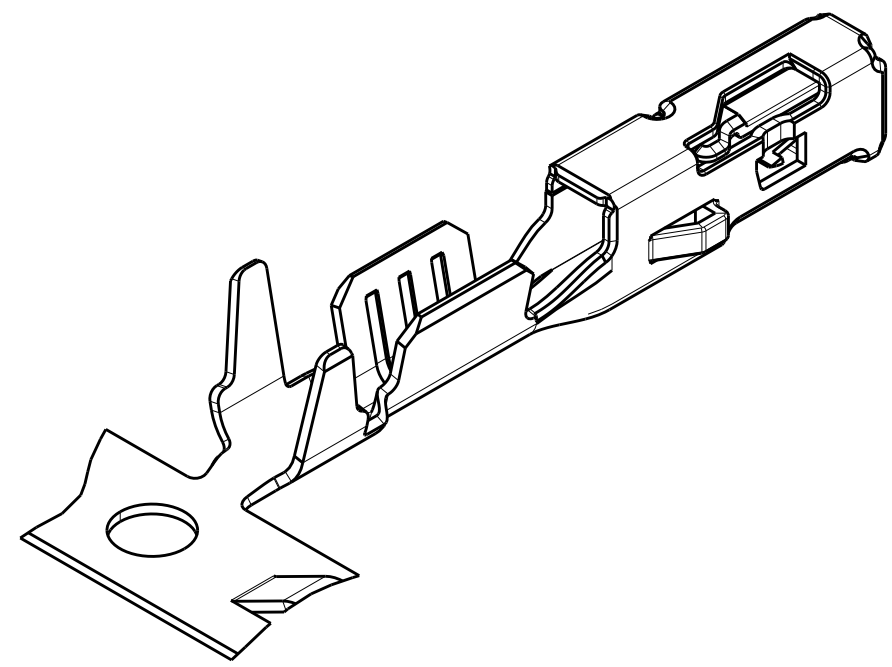
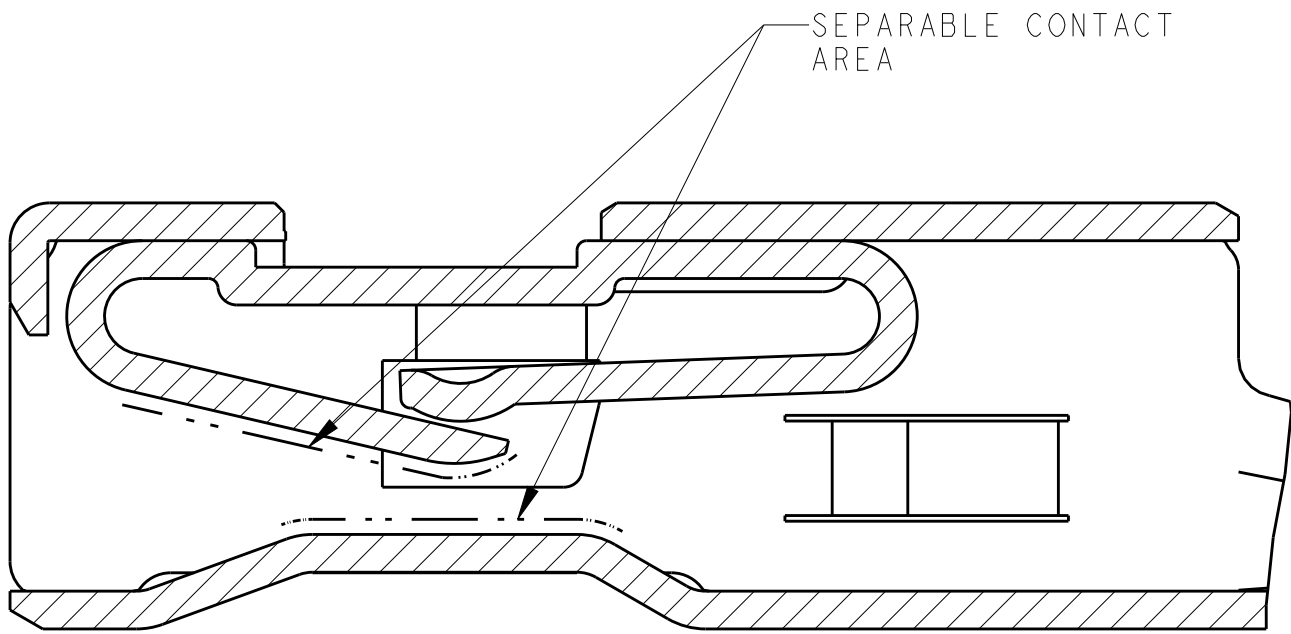


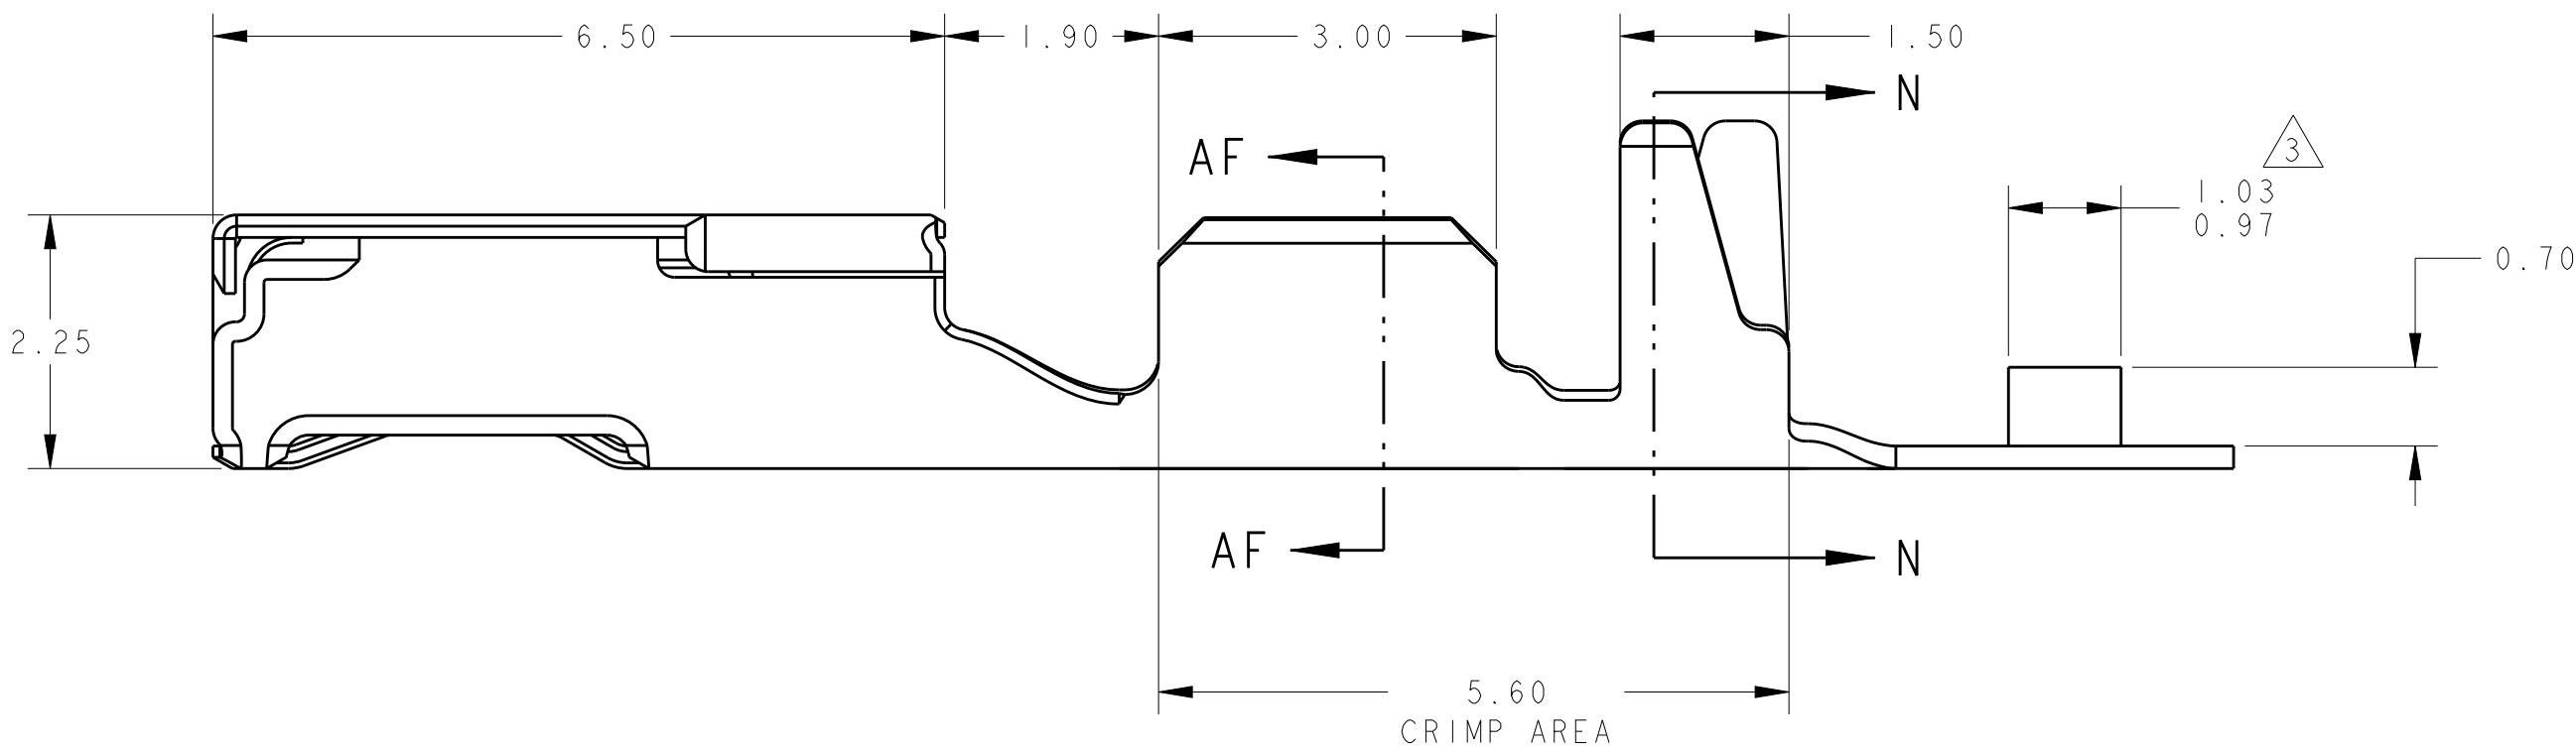



REFERENCE VIEW
SCALE 8:1

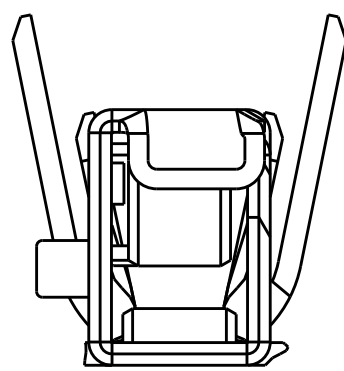

SECTION A-A
SCALE 25:1

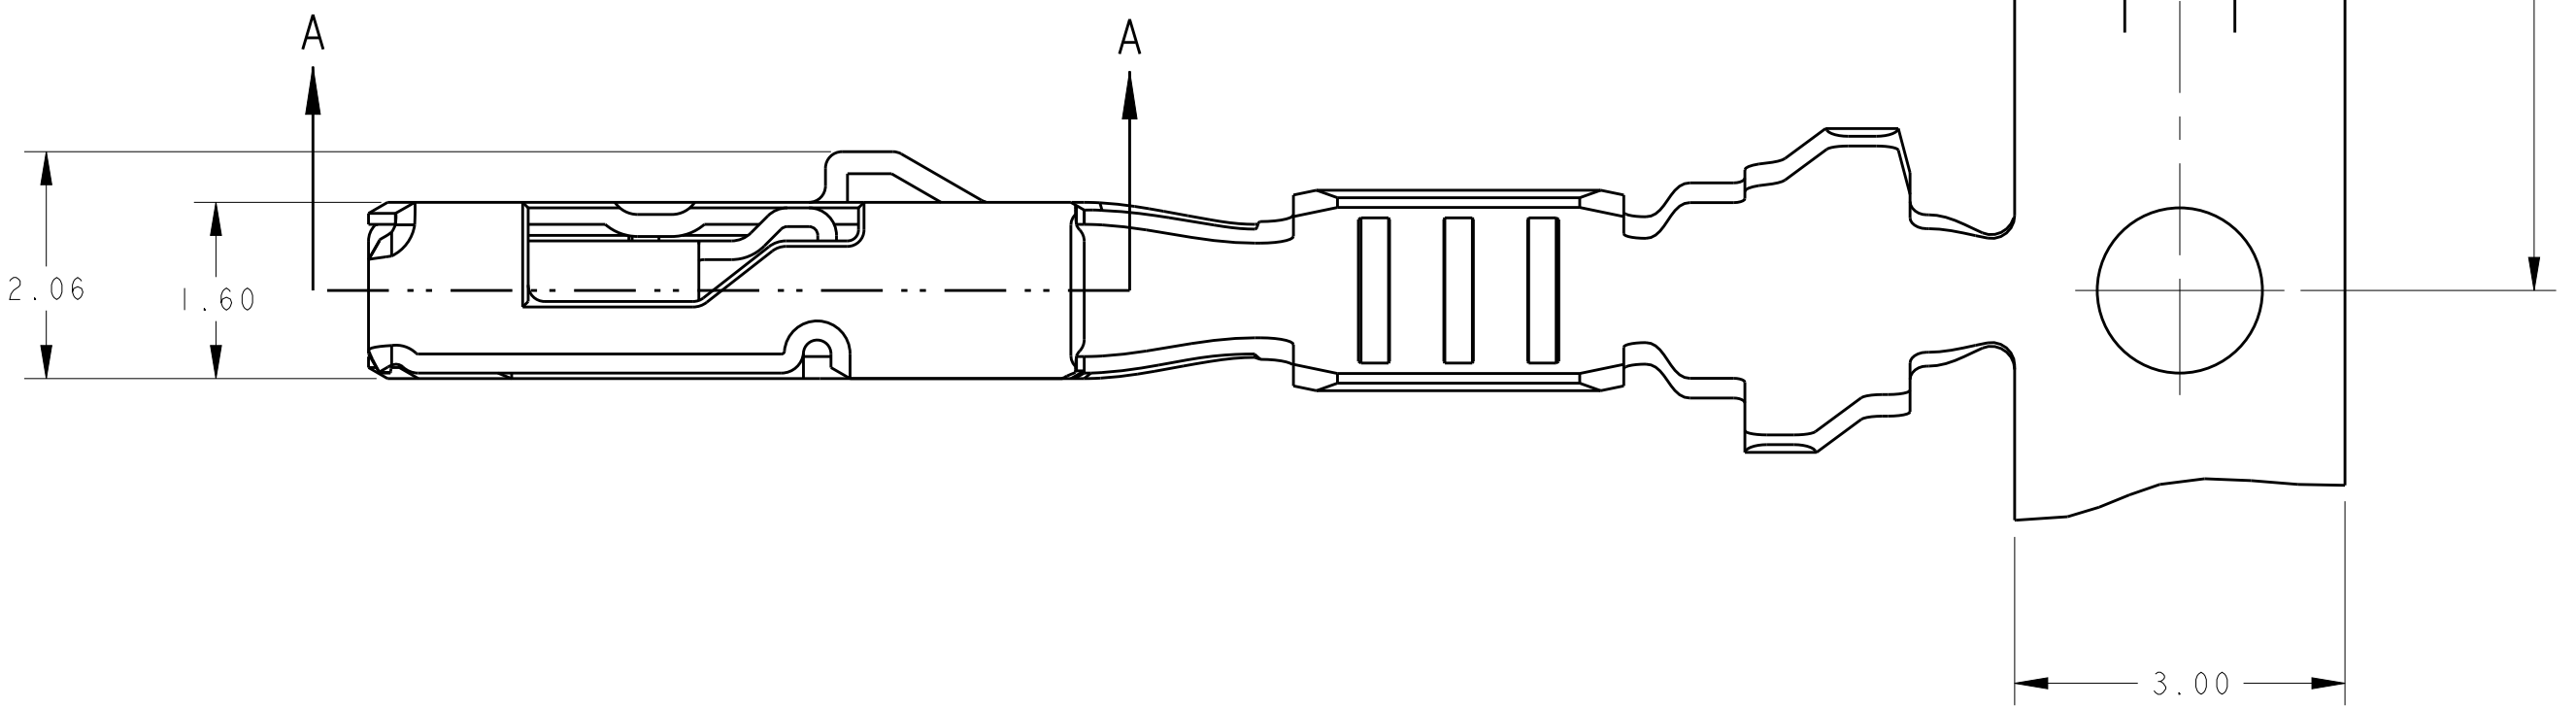


SECTION AF-AF
SCALE 20:1

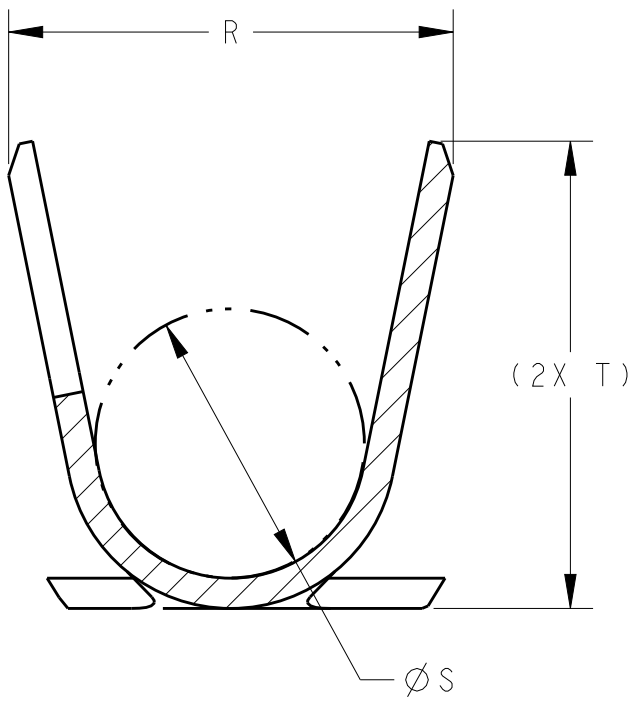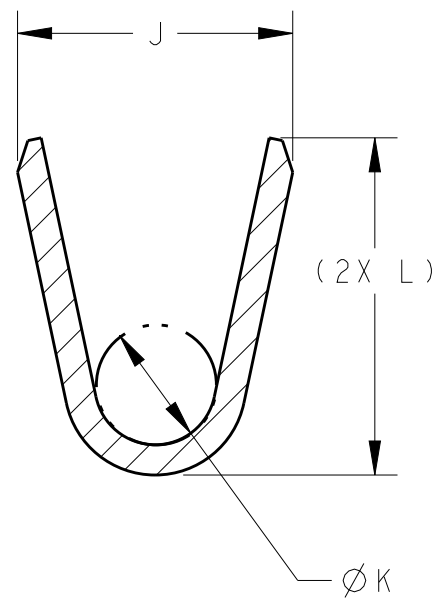

SECTION N-N
SCALE 20:1

- ⚠ MATERIAL: 0.2mm THK CuNiSi, UNS C7025
- ⚠ FINISH: PRE-PLATED SILVER FLASH ALL OVER WITH 2.00µm MIN SILVER AT SEPARABLE INTERFACE. ALL OVER 0.5µm MIN NICKEL. ELECTRICAL PERFORMANCE IS NOT AFFECTED BY DISCOLORATION DUE TO TARNISH ON THE SILVER PLATING SURFACE. ACCEPTABLE SILVER SURFACE CAN INCLUDE DISCOLORATION DUE TO TARNISH.
- ⚠ MATERIAL ID FEATURE IN "UP" POSITION.
4. THIS PRODUCT IS DESIGNED TO BE COMPATIBLE WITH SEALED APPLICATIONS.
5. NORMAL FORCE 240 GRAMS REFERENCE.
6. BULGE PERMISSIBLE UNDER ORIENTATION FEATURE.
7. TERMINAL HAS NYE LUBRICANTS NYETACT 568J-50-UV PERFORMANCE LUBE/GREASE APPLIED. THIS IS A WHITISH COLORED LUBE. AMOUNT AND VISIBILITY MAY VARY.
- ⚠ NOT INTENDED FOR SEALED APPLICATIONS.
- ⚠ SEALING CAPABILITY MUST BE EVALUATED ON AN APPLICATION BASIS.

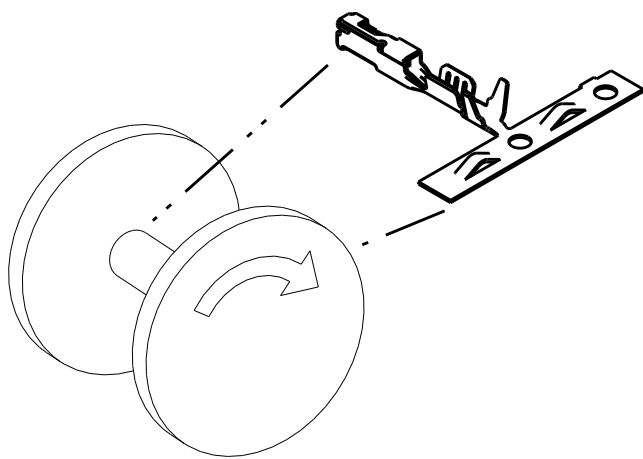

REELING DIRECTION
SCALE 2:1

1.10-1.40	2.38	1.40	2.40	1.70	0.80	1.85		0.35	22	2203242-4			
0.85-1.05	2.09	0.85	1.82	1.46	0.65	1.50		0.13	26	2203242-3			
2.06 MAX	3.09	1.78	2.94	2.43	1.00	1.96		0.75	18	2203242-2			
1.50-1.85	3.09	1.78	2.94	2.23	0.80	1.82		0.35-0.50	20-22	2203242-1			
INSULATION DIAMETER	T	S	R	L	K	J	FINISH	mm ²	AWG	PART NUMBER			
	DIMENSION						WIRE SIZE						
THIS DRAWING IS A CONTROLLED DOCUMENT.							DWN CHK APVD	19JUL2012 19JUL2012 19JUL2012		TE Connectivity			
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		CONTACT, FEMALE, 0.64mm, SIDE ORIENTATION Ag PLATE CuNiSi				
mm							PRODUCT SPEC						
			0 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±				APPLICATION SPEC						
			ANGLES ±				114-13183						
MATERIAL			FINISH				WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
-							-		A100779C=2203242				
CUSTOMER DRAWING							SCALE		15:1		SHEET 1 OF 1		REV B2