

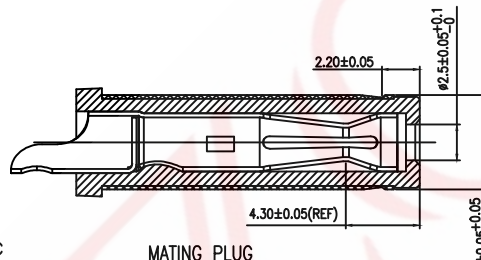
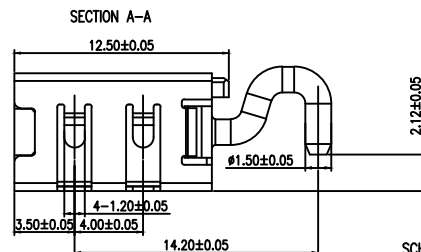



6		7		8	
REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020. 06. 12

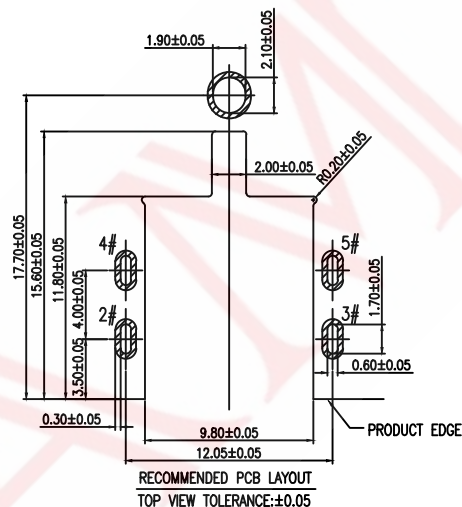


1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES



SCHEMATIC	
	1#(+)
	2#/3#/4#/5#(+)


9C N 5 125 B E G A

- Model Definition
- Mould Number: MX1151
- Needle Diameter: 2.5 mm
- Fixing Method: Without Fixed Column
- Interface Method: Flat Opening
- Overall Length: 17.7mm
- Pin Position: 5 Pins
- Mounting Method: Sunken DIP
- Product Series: High-Current Power Jacks



			GENERAL TOLERANCE	
			$\geq 0 \sim 2 <$	± 0.15
DESIGN	WANGGUIFA	2018.06.12	$\geq 2 \sim 5 <$	± 0.25
CHECKED	ZHENGUILAN	2018.06.12	$\geq 0 \sim 2 <$	± 0.15
APPROVED	LILIANJIANG	2018.06.14	≥ 5	± 0.35

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE::

15A大电流	沉板4.0	针2.5
--------	-------	------

of DWG NO: 9CN5125-A1151

PART NO: 9CN5-55251151

MODEL NO:	9CN5125BEGA
-----------	-------------

NAME:

DC JACK

SAMZO COMPONENTS
Electronic switch and connector manufacturer