

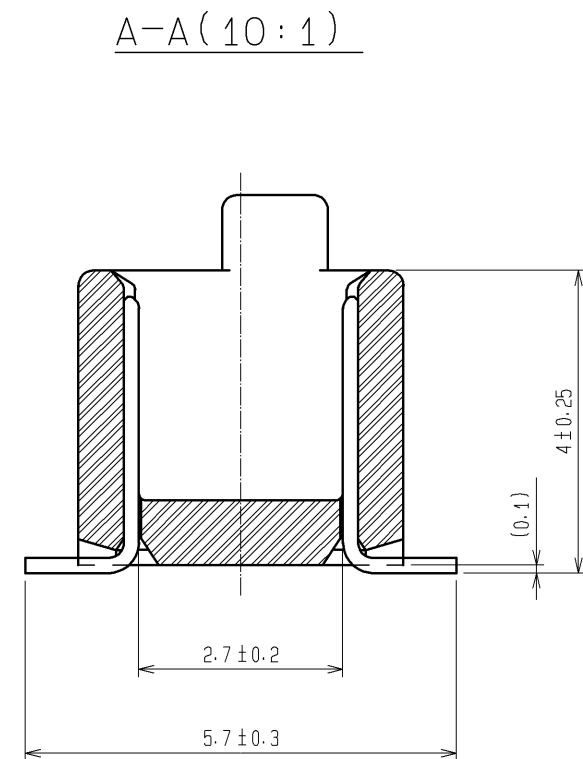


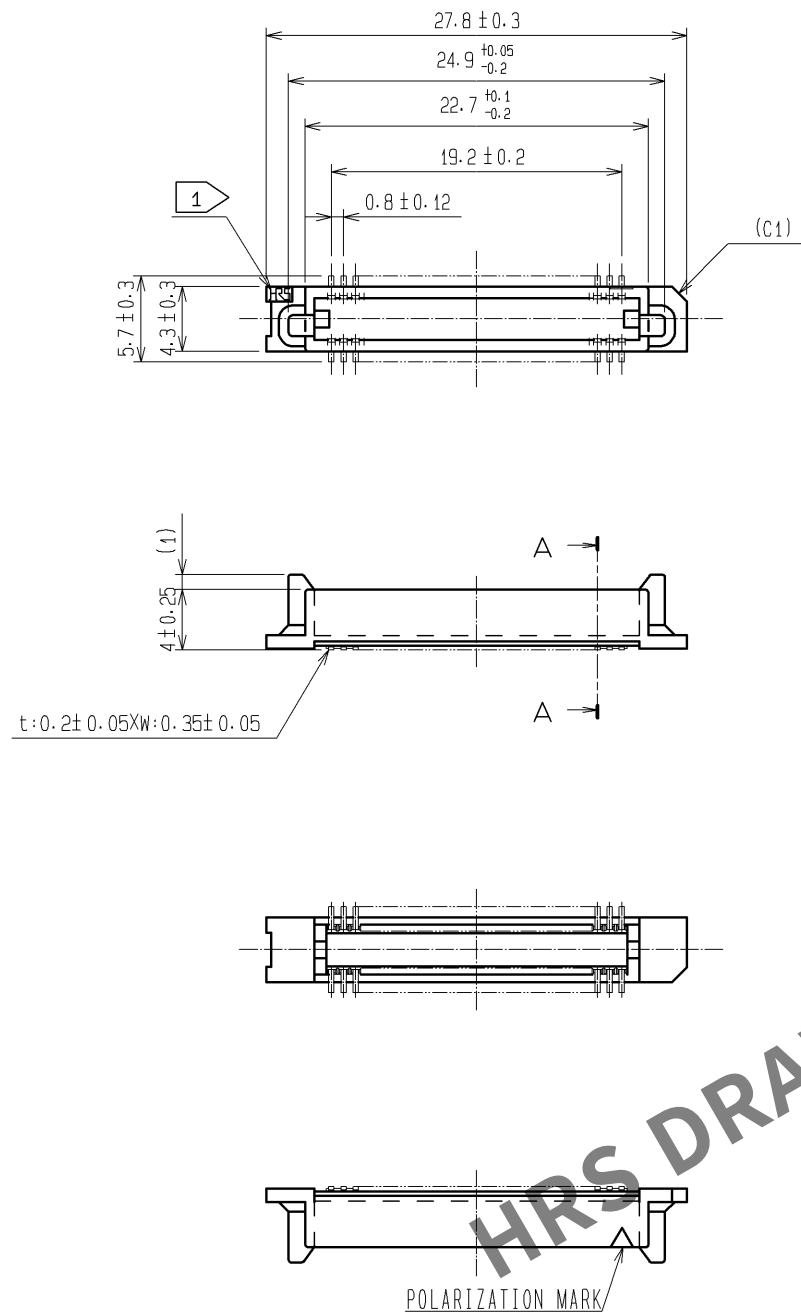


- NOTES
1. HRS MARK SHOULD BE OPTIONAL.
 2. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 4. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
 5. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

RECOMMENDED P.C.B. LAND PATTERN (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

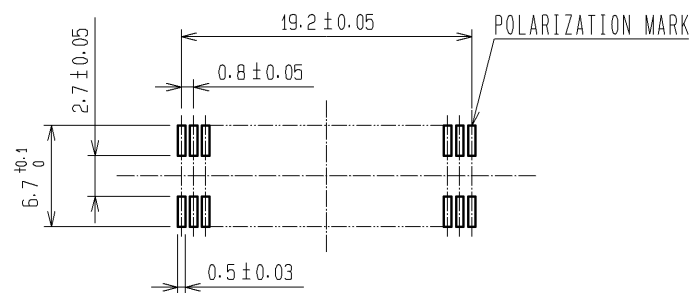

1	PPS	LIGHT BROWN UL94V-0	4	POLYESTER	COVER TAPE
			3	POLYSTYRENE	EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH . REMARKS	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : GOLD FLASH UNDER PLATING : NICKEL 1.5μm min.
			NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	14.12.08	DRAWING NO.	EDC3-071642-03
		CHECKED : HT. YAMAGUCHI	14.12.08	PART NO.	FX6A-50P-0.8SV(92)
		DESIGNED : KJ. NISHIWAKI	14.12.08	CODE NO.	CL576-0204-0-92
		DRAWN : KN. YAMAZAKI	14.12.05		
					1/2

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

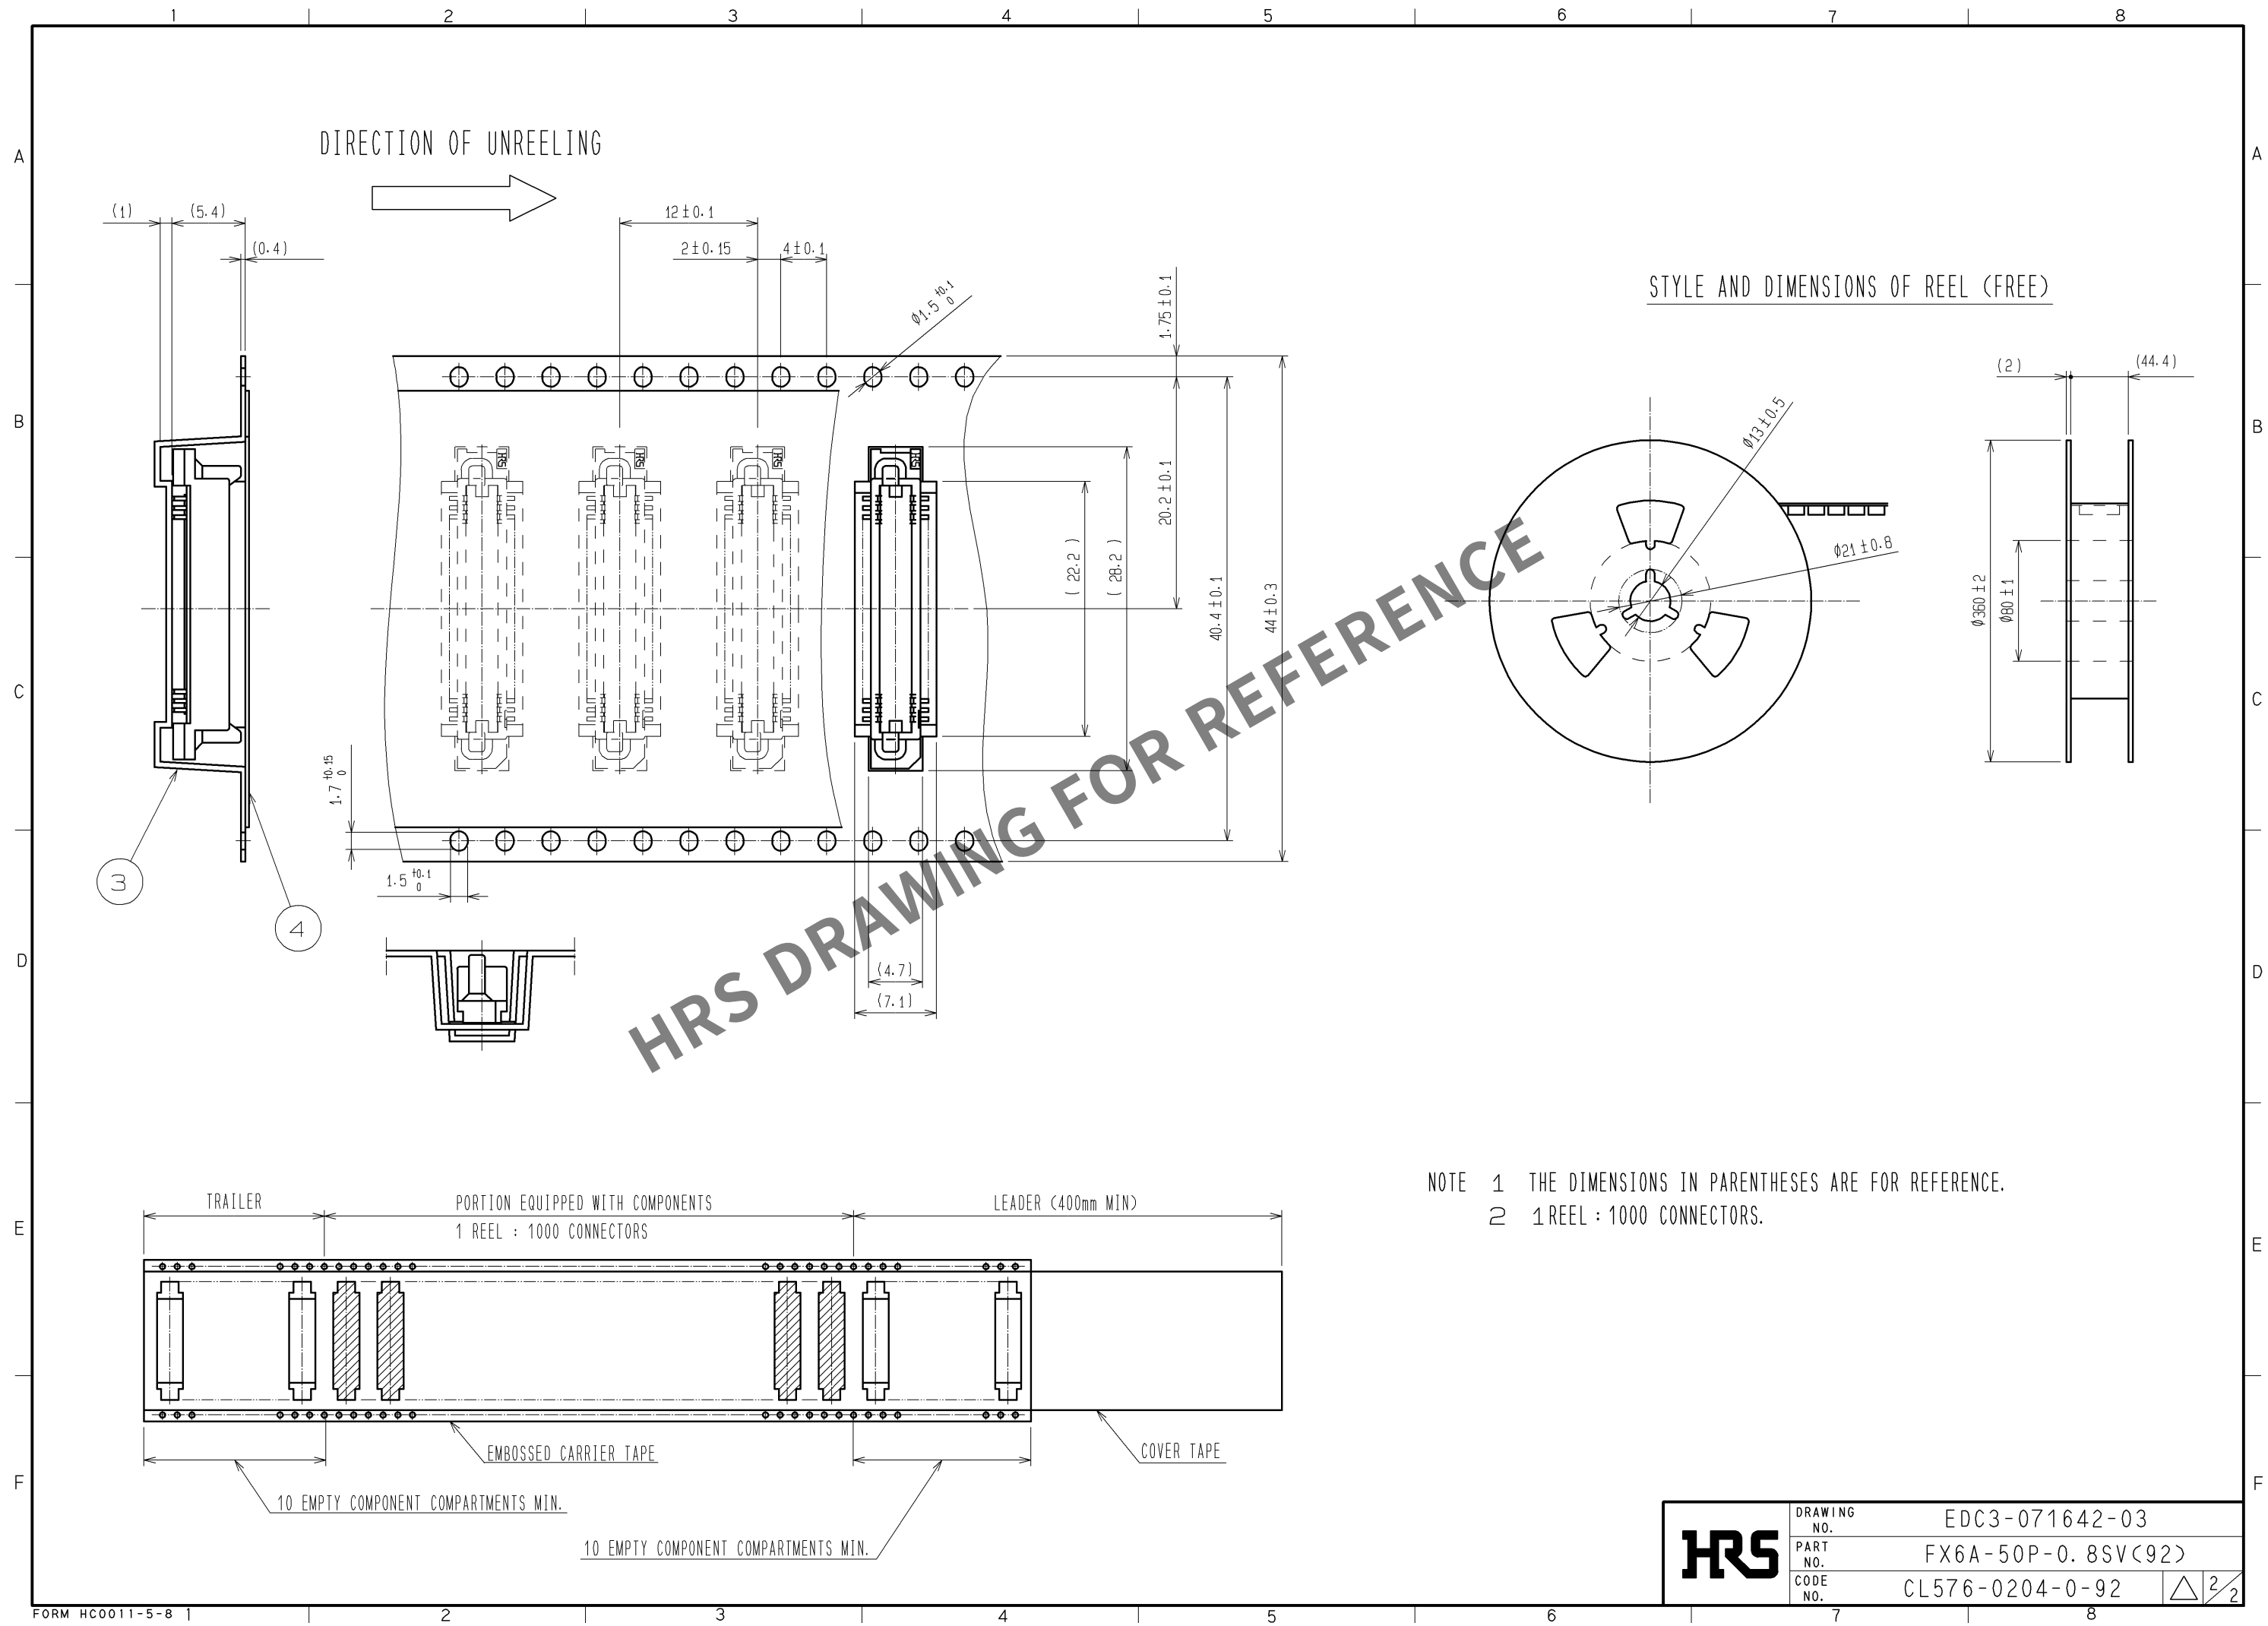

HRS	DRAWING NO.	EDC3-071642-03
	PART NO.	FX6A-50P-0.8SV(92)
	CODE NO.	CL576-0204-0-92

2/2