

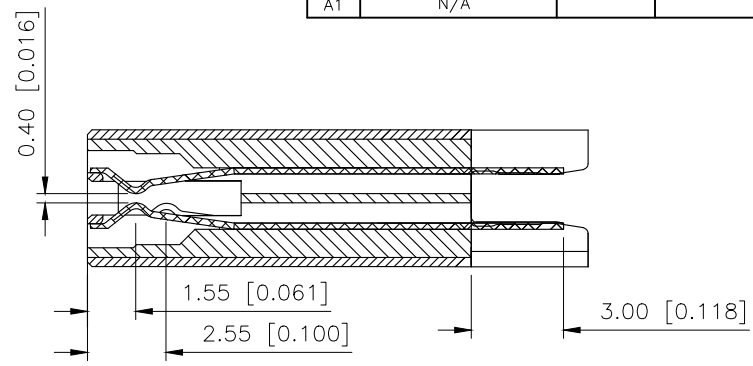
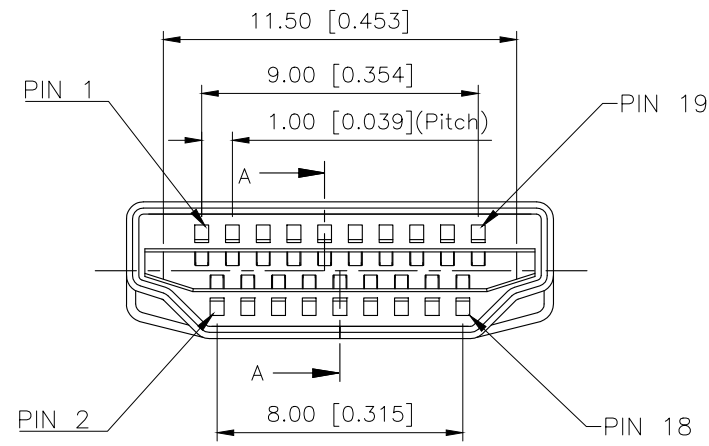
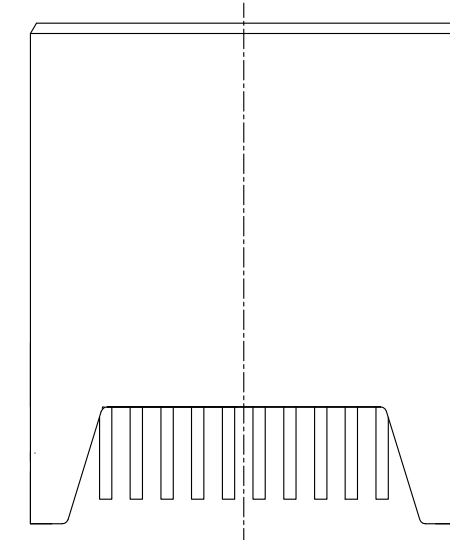


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.03	阿树

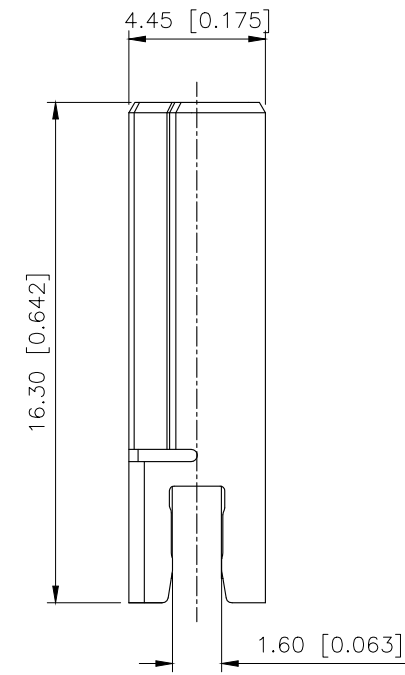

NOTE :
1.MATERIAL 材料:
HOUSING 胶壳: LCP,UL94V-0
CONTACT 端子:C5191
SHELL 外壳:BRASS
2.FINISH 电镀:
CONTACT 端子: C5191,GOLD OVER NICKEL
SHELL 外壳: BRASS,GOLD FLASH ALL PLATING.
3.Electrical parameters 电气参数
Contact Current Rating 触点电流额定值: 0.5Amin
Voltage Rating 额定电压: 40V AC(RMS)
Operating temperature 工作温度: -25℃ ~ +85℃
4.Durability 耐用性: 10000 cycles

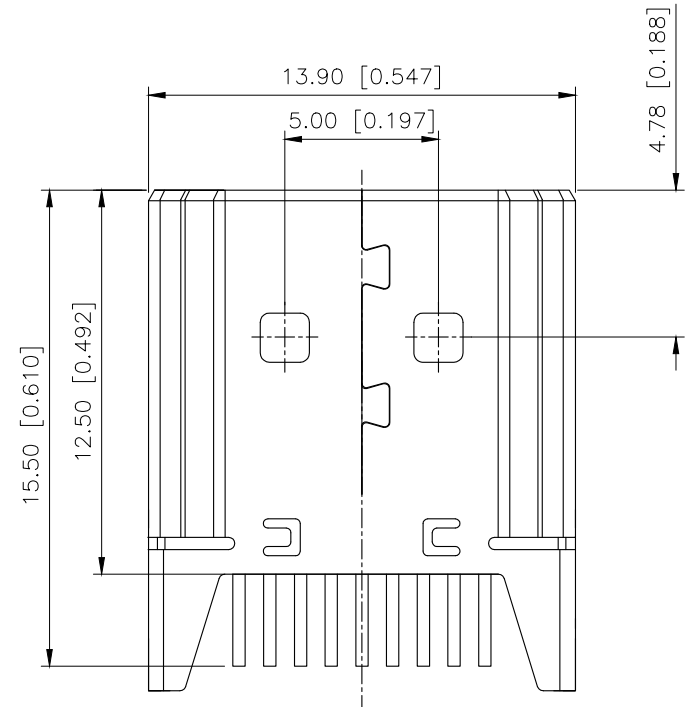

A72-16J3-5X5G1
1:Au 1U"
5:Au 15U"
6:Au 30U"

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: HDMI CONNECTOR
CHECKED		UNIT: mm/in	PART NO.: A72-16J3-5X5G1
APPROVED		SIZE: A4	DWG NO.: