


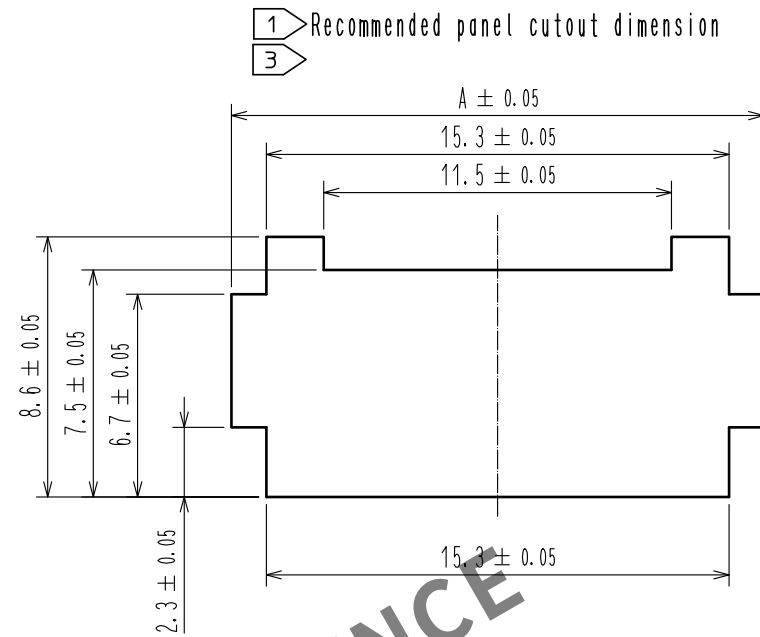
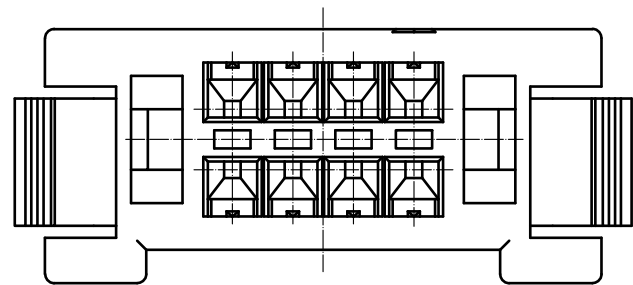
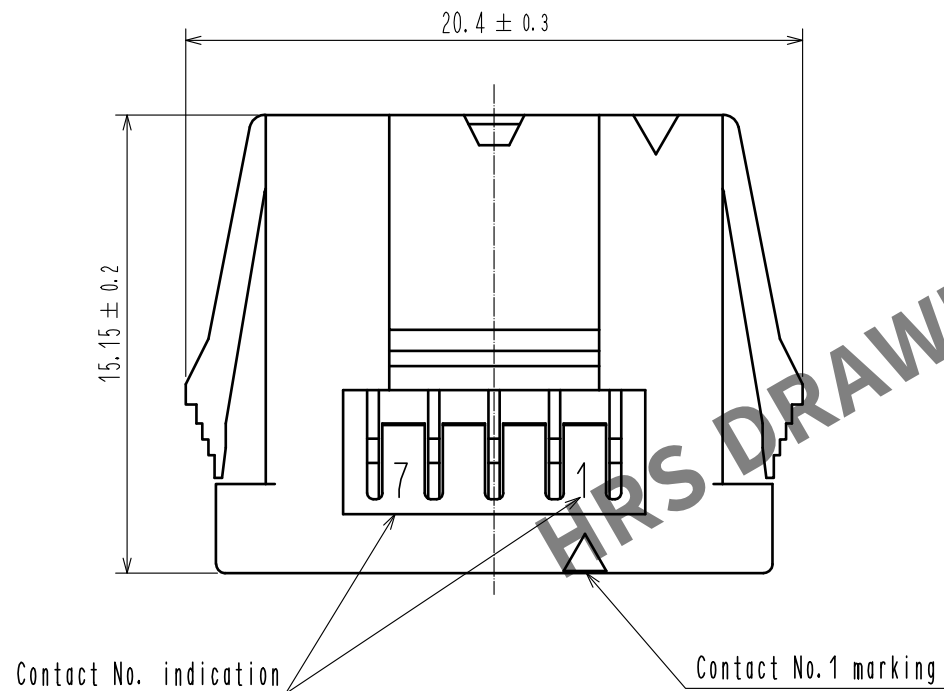


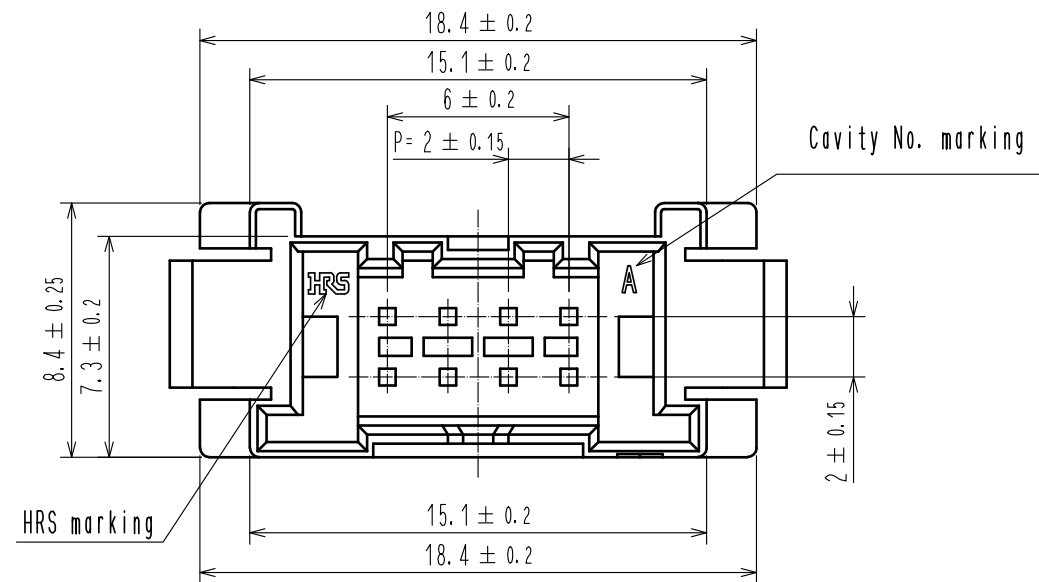

Panel thickness	A
0.5~0.8	17.6
0.9~1.3	18.1
1.4~1.8	18.5
1.9~2.3	18.9

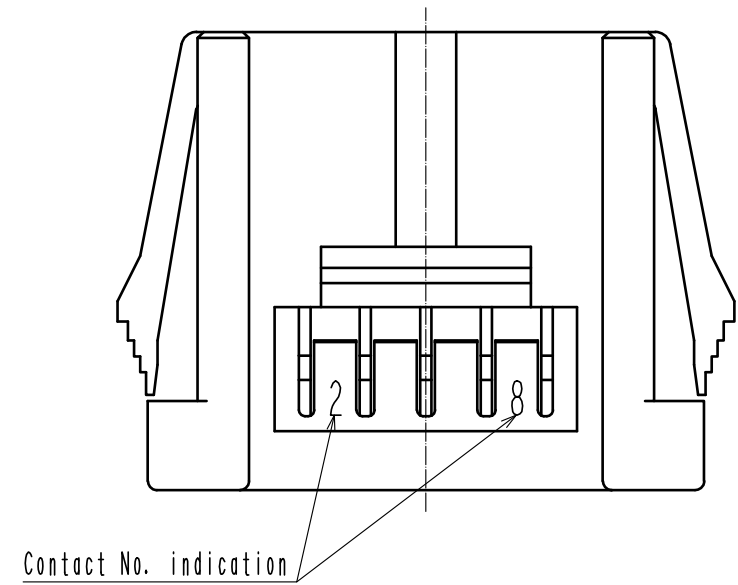

- Note
- 1 Please use non-radius side for the panel hooking area.
 - 2 Applicable panel thicknessing is 2.3 to 0.5 mm.
 - 3 Consult hirose for the other panel cutout designs than recommended one.
 - 4. Per pack : 100 pieces.
 - 5. UL(File No.E52653).
 - 6-UL(File No.E52653) authorization article.

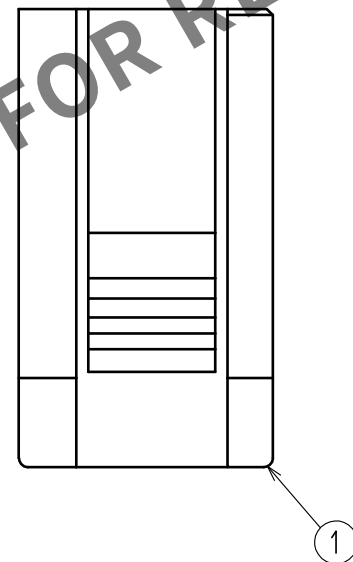

NO.				1				PBT				UL94V-0, BLAC			
MATERIAL				FINISH . REMARKS				MATERIAL				FINISH . REMARKS			
UNITS				SCALE				COUNT				DESCRIPTION OF REVISIONS			
mm				4 : 1				1				DIS-H-00004537			
HRS				HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				20160601			
								CHECKED : YN. TAKASHITA				20160601			
								DESIGNED : TT. OHSAKO				20160601			
								DRAWN : TT. OHSAKO				20160601			
								DRAWING NO.				EDC-366284-00-00			
								PART NO.				DF51-8DEP-2C			
								CODE NO.				CL543-5073-0-00			