

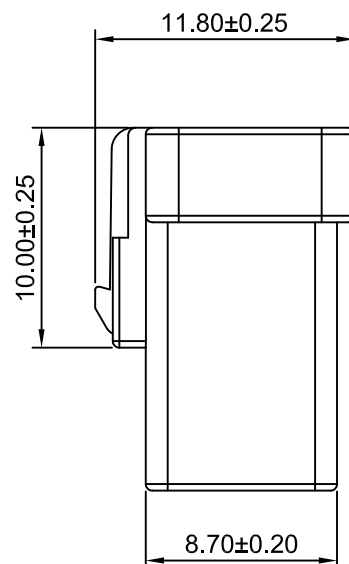
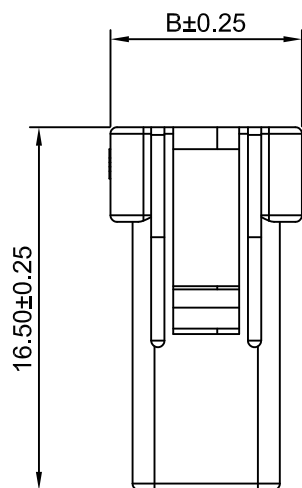
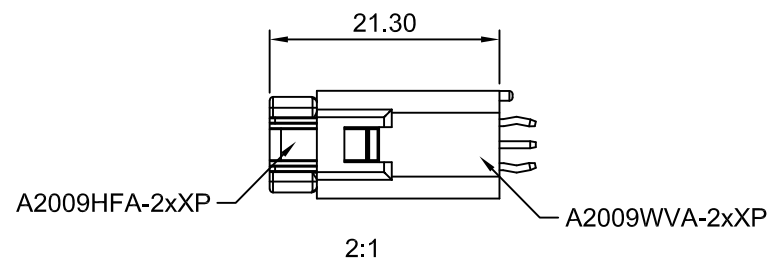
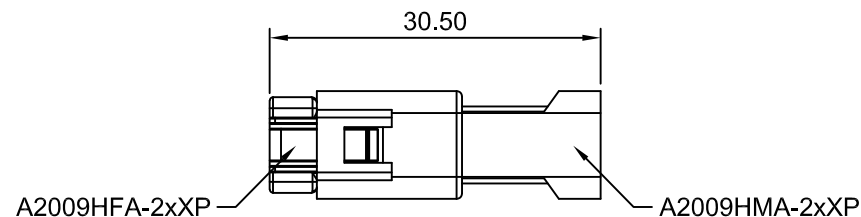



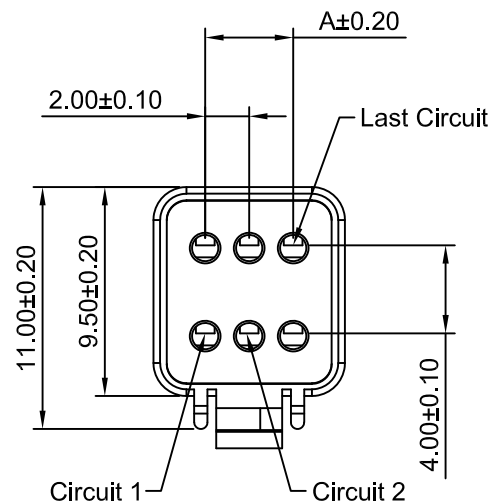

Silicone rubber
(Light blue)

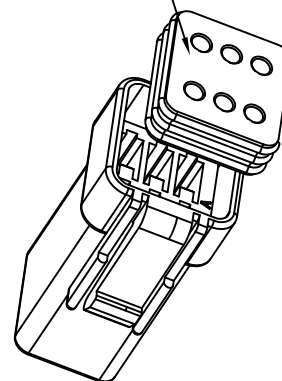

Ordering Information:

A2009HFA-XP - ***

1 2

1.Part NO.

2.Color:

(Blank):White

BK:Black

BL:Blue

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $10\text{m}\Omega$ Max.
Insulation Resistance: $1000\text{M}\Omega$ Min.
Withstanding Voltage: 1000V AC/minute
Material: PBT+15%G.F,UL94V-0(White)
Ingress Protection: IPX7 of IEC60529

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2009HFA-2x3P	4.00	8.70
A2009HFA-2x4P	6.00	10.70

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE INFORMATION	2021.03.12
A4	CHANGE THE DRAWING	2020.10.28
A3	CHANGE THE TEMPERATURE RANGE	2019.09.30
A2	ADD THE INGRESS PROTECTION	2019.08.12
A1	CHANGE THE DRAWING	2019.05.07
A0	NEW RELEASE	2018.12.10
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	3:1	1 of 1
DRWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		

TITLE		DRAWING NO.	REV
2.00x4.00mm PITCH DUAL ROW HOUSING			
A2009HFA-2xXP		A5	