


Model 2443K Patch Cord, Double Banana Plug To Miniature Double Banana Plug

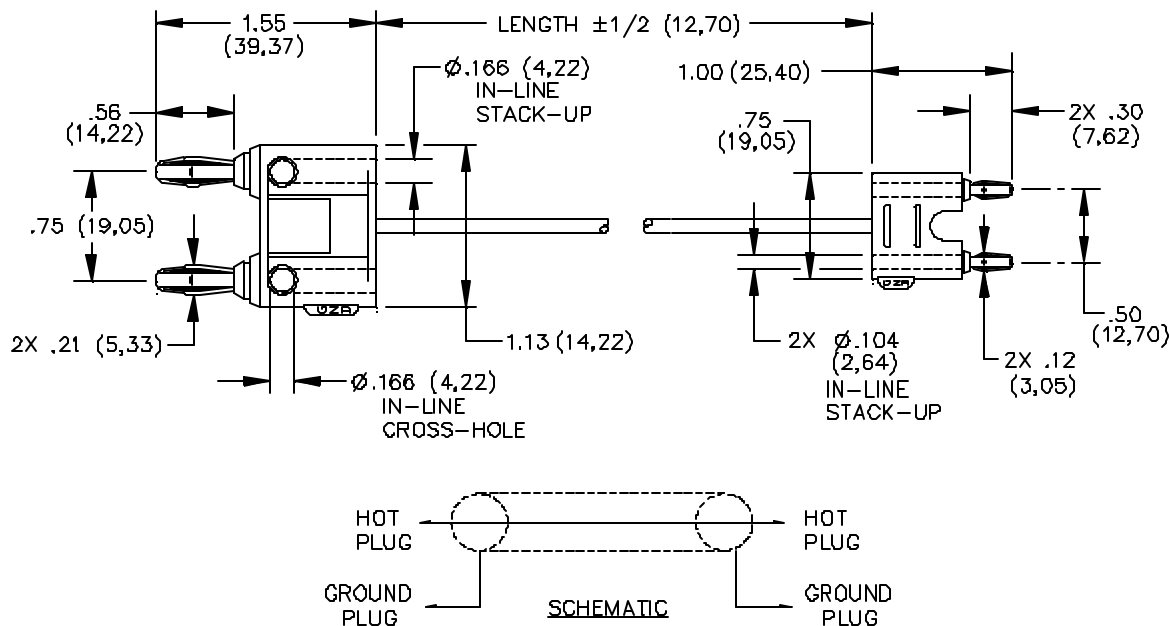

1/2 Hard.

MATERIALS:

Connector: 1st End - Double Banana Plug

Spring: Beryllium Copper per QQ-C-533, Alloy C172, Cond. HT.

Plug Body: Brass per QQ-B-626, Alloy 360, 1/2 hard.

Finish: Nickel plated per QQ-N-290 Class 2, 200/300 microinches.

Insulation: Polypropylene, molded to banana plug bodies and cable. Color matches color of cable.

Marking: "POMONA ELECTRONICS, CALIF."

Cable Type: RG174/U, .100" O.D.

Cap. Pf./ft.: 30.8

Nominal Impedance: 50 Ohms

Connector: 2nd End - Miniature Double Banana Plug

Spring - Beryllium Copper per QQ-C-533,

Berylco 25, Cond. H.T.

Plug Body - Brass per QQ-B-626, Alloy 360,

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class 1, 200/300 microinches.

Insulation: Same as double banana plug.

Marking: "POMONA ELECTRONICS CALIF."

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.

Operating Voltage: 1000 VRMS

ORDERING INFORMATION: Model 2443-K-XX

XX = Length in inches. Std. Lengths: 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm).

Additional lengths can be quoted upon request.

Ordering Example: 2443-K-36, Cable length will be 36" (9,44 mm) long.

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[2443-K-24](#) [2443-K-60](#) [2443-K-48](#) [2443-K-36](#)