

92mm sq.**San Ace 92WF****General Specifications**

- Material.....Frame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-0)
- Expected LifeRefer to specifications (L10:Survival rate: 90% at 60℃ ,
rated voltage, and continuously run in a free air state)
- Lead Wire⊕red ⊖black (Sensor) yellow
- Storage Temperature ...-30℃ to +70℃ (Non-condensing)

The product can be used in an oil mist environment*



*Environment where machining oil mist is scattered.

Usage of this product requires an evaluation with the oil that will be used.

92×92×32mm [Mass : 185g] **9WF type****Specifications** The following nos. **have pulse sensors and ribs.**

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Airflow [m³/min] [CFM]		Max. Static Pressure [Pa] [inchH ₂ O]		SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9WF0924S201	24	20.4 to 27.6	0.5	12	7,300	2.8	98.9	255	1.02	58	−20 to +70	40,000/60℃
9WF0924H201			0.35	8.4	6,500	2.45	86.5	200	0.8	56		


Models without sensors or with lock sensors are available as options. Please refer to the index (p. 481).

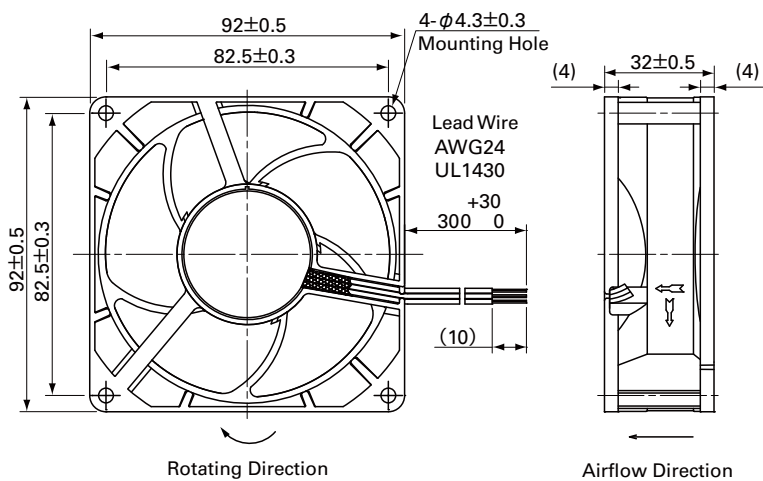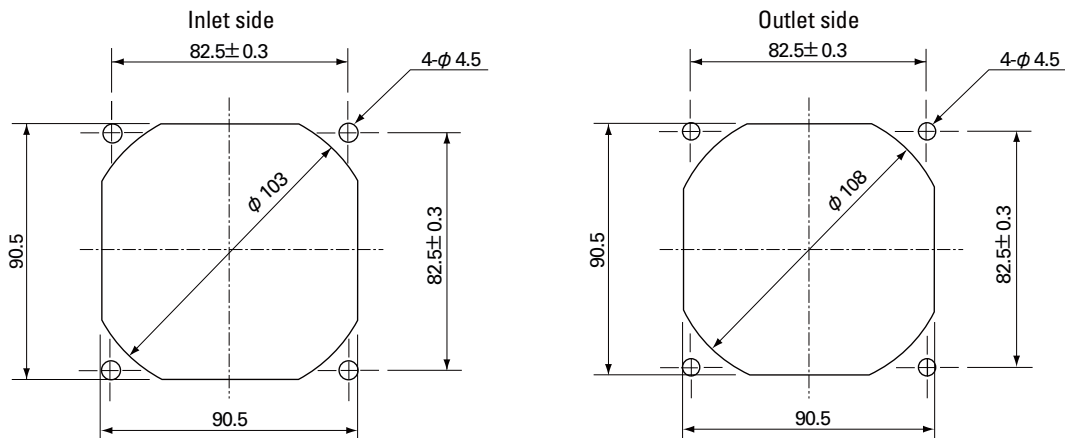Dimensions (unit: mm)**Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)**


Options (unit: mm)

Finger Guards


Model : 109-099C Surface treatment : Nickel-chrome plating (silver) Color

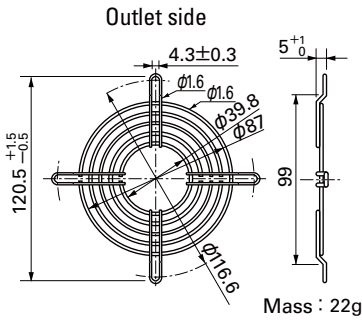


Model : 109-099E Surface treatment : Nickel-chrome plating (silver) Color
: 109-099H : Cation electropainting (black)

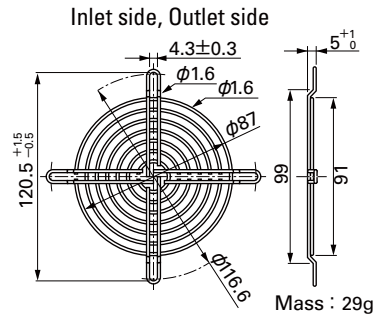

Airflow - Static Pressure Characteristics

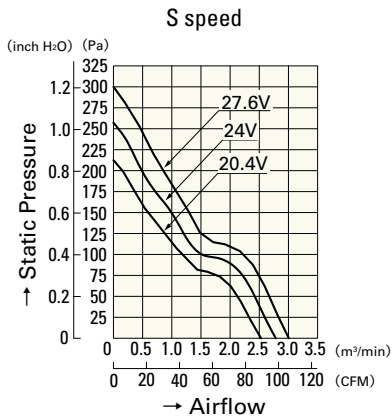

9WF0924S201

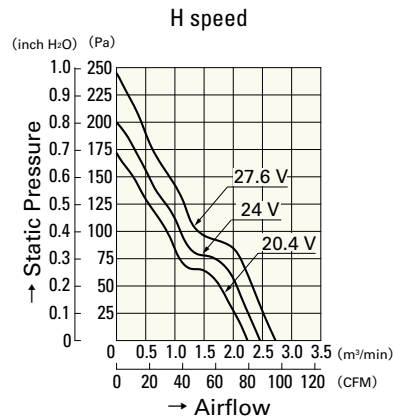

9WF0924H201

DC

Oil Proof Fan 92mm