
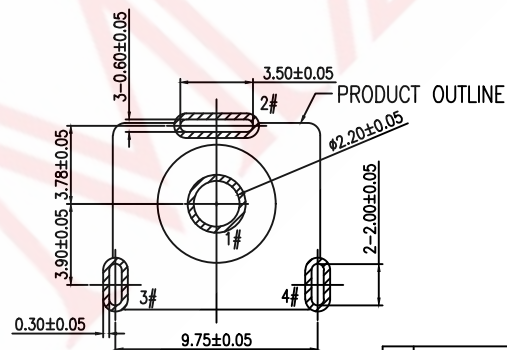
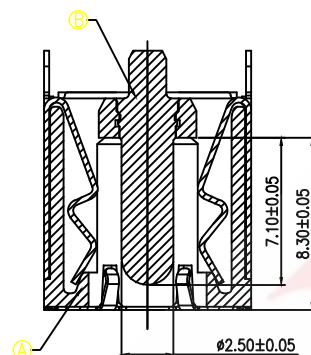
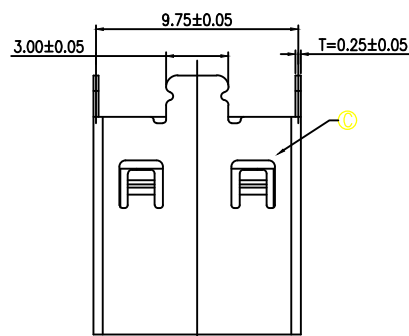

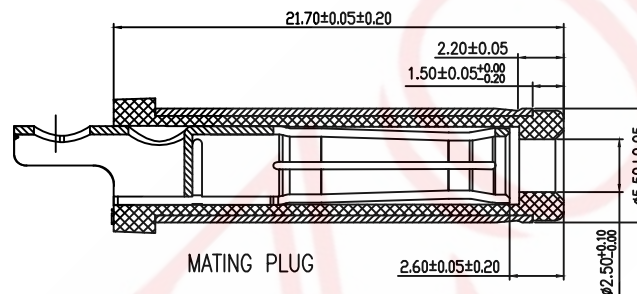


6		7		8	
REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020. 06. 12

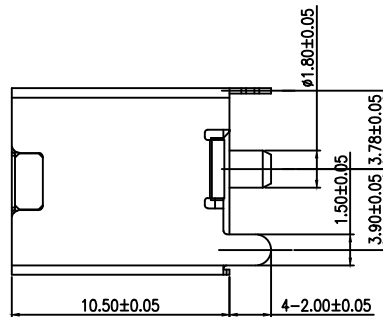


1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

FIRST VIEW



The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE::

20A大电流 立式插件

of DWG NO: 9CL4105-A1073

PART NO: 9CL4-55251073

MODEL NO:	9CL4105BEGA
-----------	-------------

NAME:

DC JACK

GENERAL TOLERANCE

$\geq 0 \sim 2 <$	± 0.15
-------------------	------------

$^{12}\geq 2\sim 5<$	± 0.25
----------------------	------------

$\geq 0 \sim 2 <$	± 0.15
-------------------	------------

≥ 5	± 0.35
----------	------------

SCALE

1:1


UNIT

	m
--	---

	san
--	-----

SAMZO COMPONENTS

Electronic switch and connector manufacturer



3D VIEW