
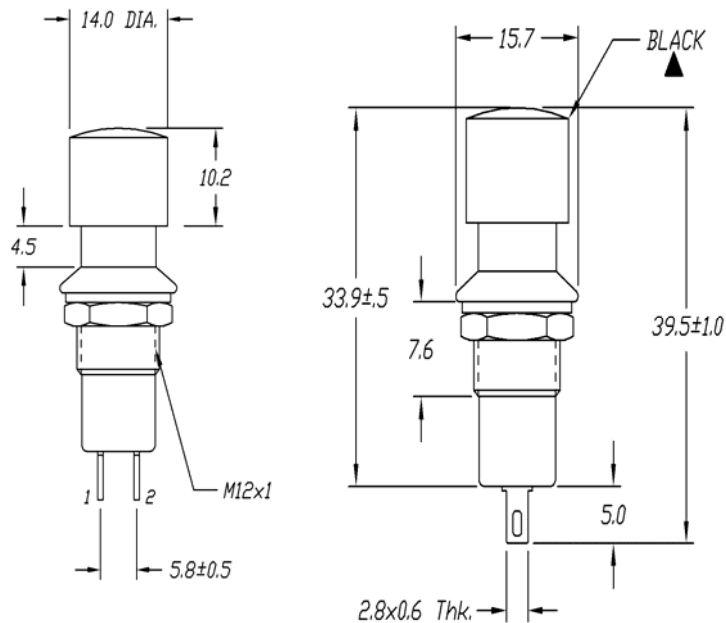



## PS1040 PANEL MOUNT PUSH BUTTON SWITCHES



### MECHANICAL SPECIFICATIONS

Mechanical Life: 6,000 Cycles  
Electrical Life: 6,000 cycles

### ELECTRICAL SPECIFICATIONS

Contact Rating: 3A@125VAC  
1.5A@250VAC

Contact Resistance (Initial Max): 50m Ohms  
Insulation Resistance: 500VDC 100M Ohms Min.  
Dielectric Strength: 1000VAC 1 minute

### ENVIRONMENTAL SPECIFICATIONS

Operating/Storage Temp: -20°C to 65°C



### How To Order

**SERIES**

PS1040

**CIRCUIT**A=OFF-(ON)  
B=OFF-ON

( )=Momentary

**CAP COLOR**BLK=BLACK  
RED=RED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[PS1040A-RED](#) [PS1040A-BLK](#) [PS1040BBLK](#) [PS1040BRED](#) [PS1040ARED](#) [PS1040ABLK](#)