


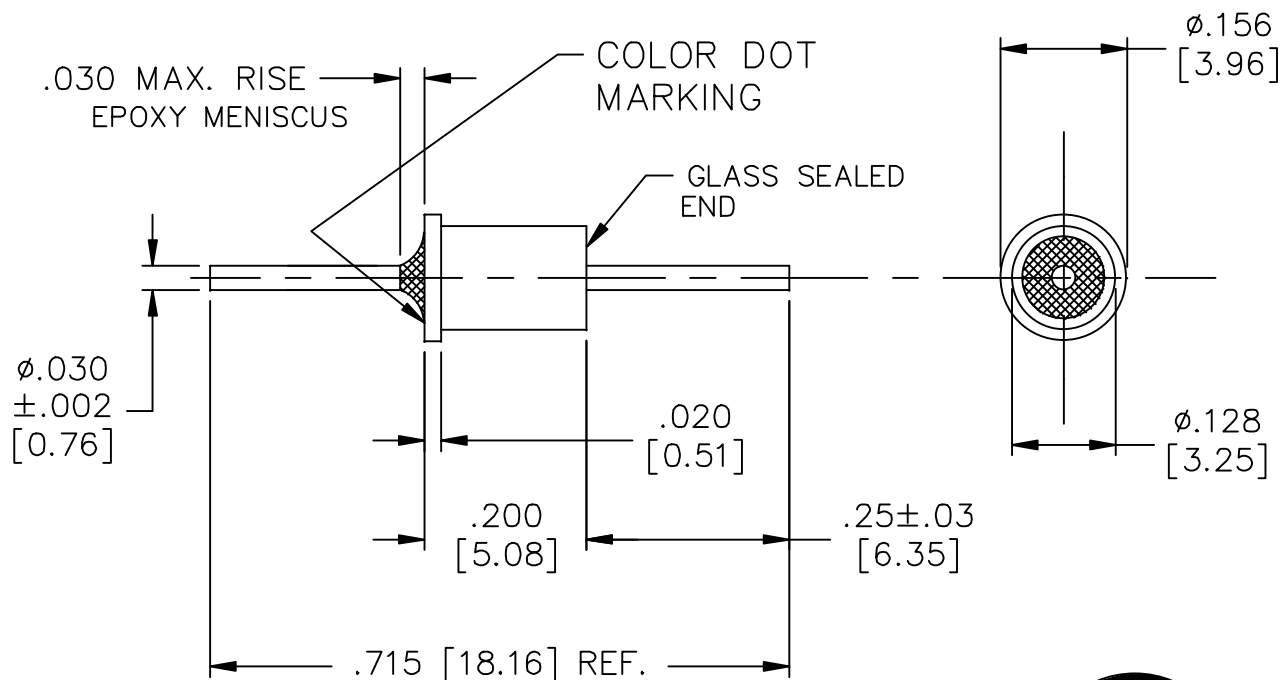

$\phi.030$
 $\pm.002$
[0.76]

COLOR DOT
MARKING

GLASS SEALED
END

.020
[0.51]

.200
[5.08]

.25±.03
[6.35]

.715 [18.16] REF.




NOTES:

1. SUGGESTED MOUNTING HOLE = $\phi.130$

LEAD FINISH: GOLD PL.	
CASING FINISH: GOLD PL.	
CAPACITANCE	1200pF MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	125°C -- VAC MAX. 125°C 200 VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
1	--
10	8
100	28
1 GHz	42
10 GHz	50

SCHEMATIC



MARKING:

PART: COLOR DOT: WHITE
BAG:

SCI-9980-122
DATE CODE
LOT NO.
QTY/BAG (200 MAX.)

00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
CN 53068-ENG	CHANGE NOTICE	Fractions $\pm 1/64$
		Dec. .xx±
		Dec. .xxx±.005
		Angles $\pm 0^{\circ} 30'$
		CODE IDENT. NO. DLSP2



FAIRVIEW
PENNSYLVANIA

Dwn. KAUFFMAN

Description

Date 2-22-10

FEEDTHRU FILTER

Engr. B. DEVINE

SCI-9980-122

Scale NONE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[API Technologies:](#)

[SCI-9980-122](#)