



1P

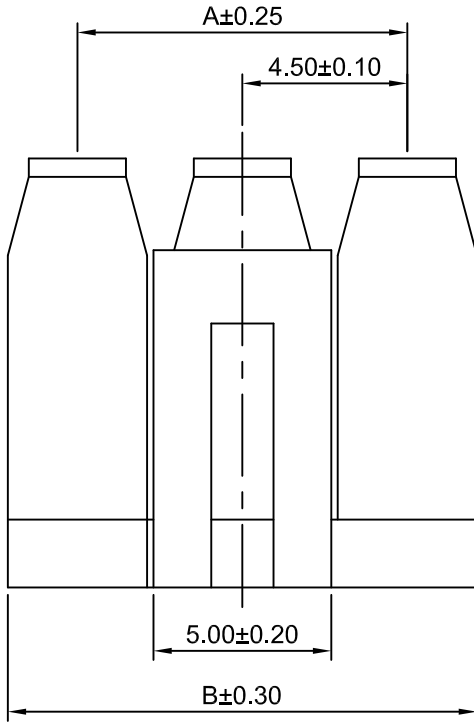

2P~3P

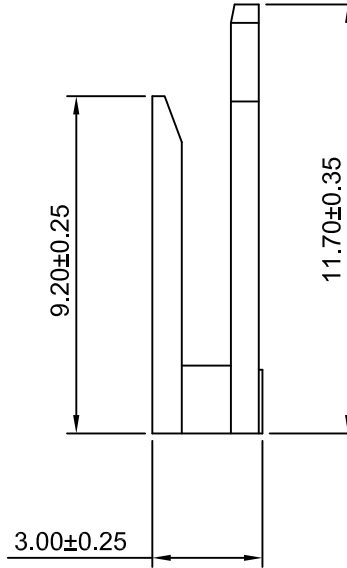

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(Ivory)


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
1P	---	4.00	3P	9.00	13.00
2P	4.50	8.55			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 4.50mm PITCH WIRE SEAL	
mm		5:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. C4501S-XP	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°							
3						REV A1	
5							

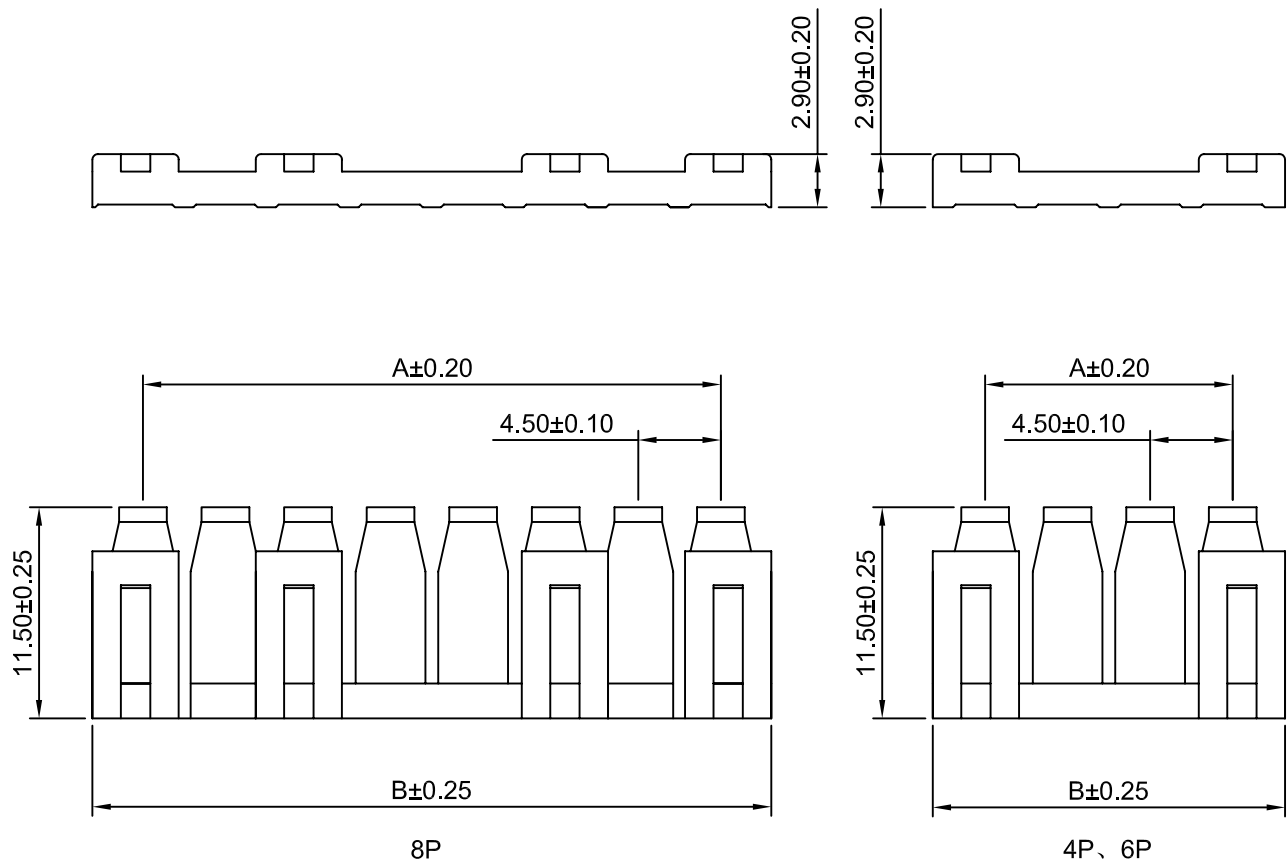

SPECIFICATIONS:

Current Rating: 10A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	13.50	19.20	8P	31.50	37.00
6P	22.50	26.30			

CJT CONN

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

4.50mm PITCH

Wire Seal

General Tolerance			ANGLE±	DRAW NO :	REV
A0	NEW RELEASE	2015.04.15			
REV	DESCRIPTION	DATE	x.x≤0.25 x.xx≤0.20 x.xxx≤0.15	C4501S-XP	A0