
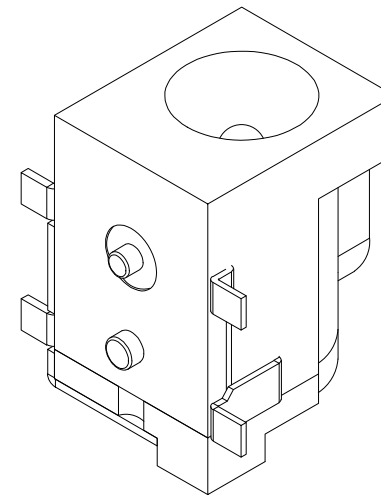
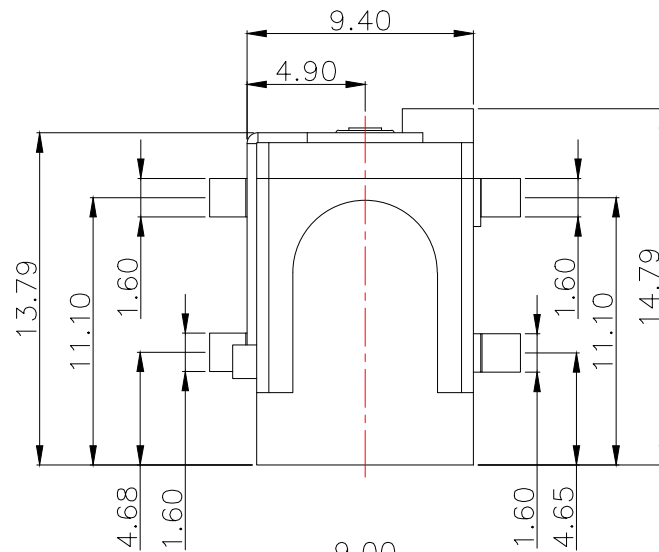
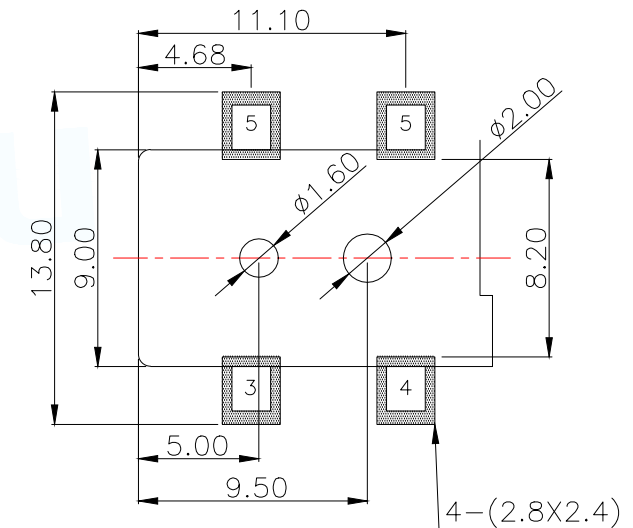
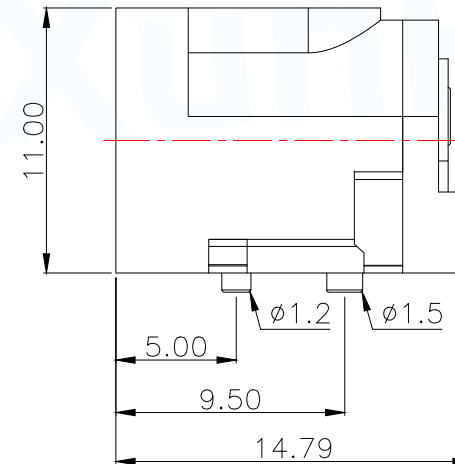



RECOMMEND PULG

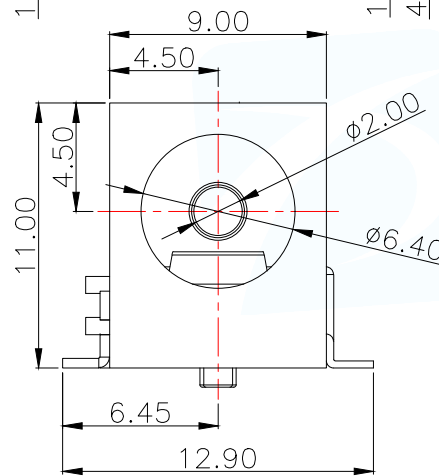

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance

Rated electrical load	DC 24V 2.5A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ DC250V
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-40C°~+85C°
service life	5000cycles



SCHEMATIC

2	TIP SPRING	1	PHOSPHOR BRONZE	MB:CuSn PLATED
1	CENTER PIN	1	BRASS	MB:CuSn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK
MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DC SOCKET		
DECIMALS:		PAR		DC-050-B200
ANGLES:		DWN		
X.X±0.30		CHKD		
X.XX±0.25		APVD		
X.XXX±0.15		SCALE:1:1		
CUSTOMER COPY		SIZE:A4		UNIT:MM
		SHEET:1F1		REV:A