




Connectors > PCB Connectors > PCB Headers & Receptacles

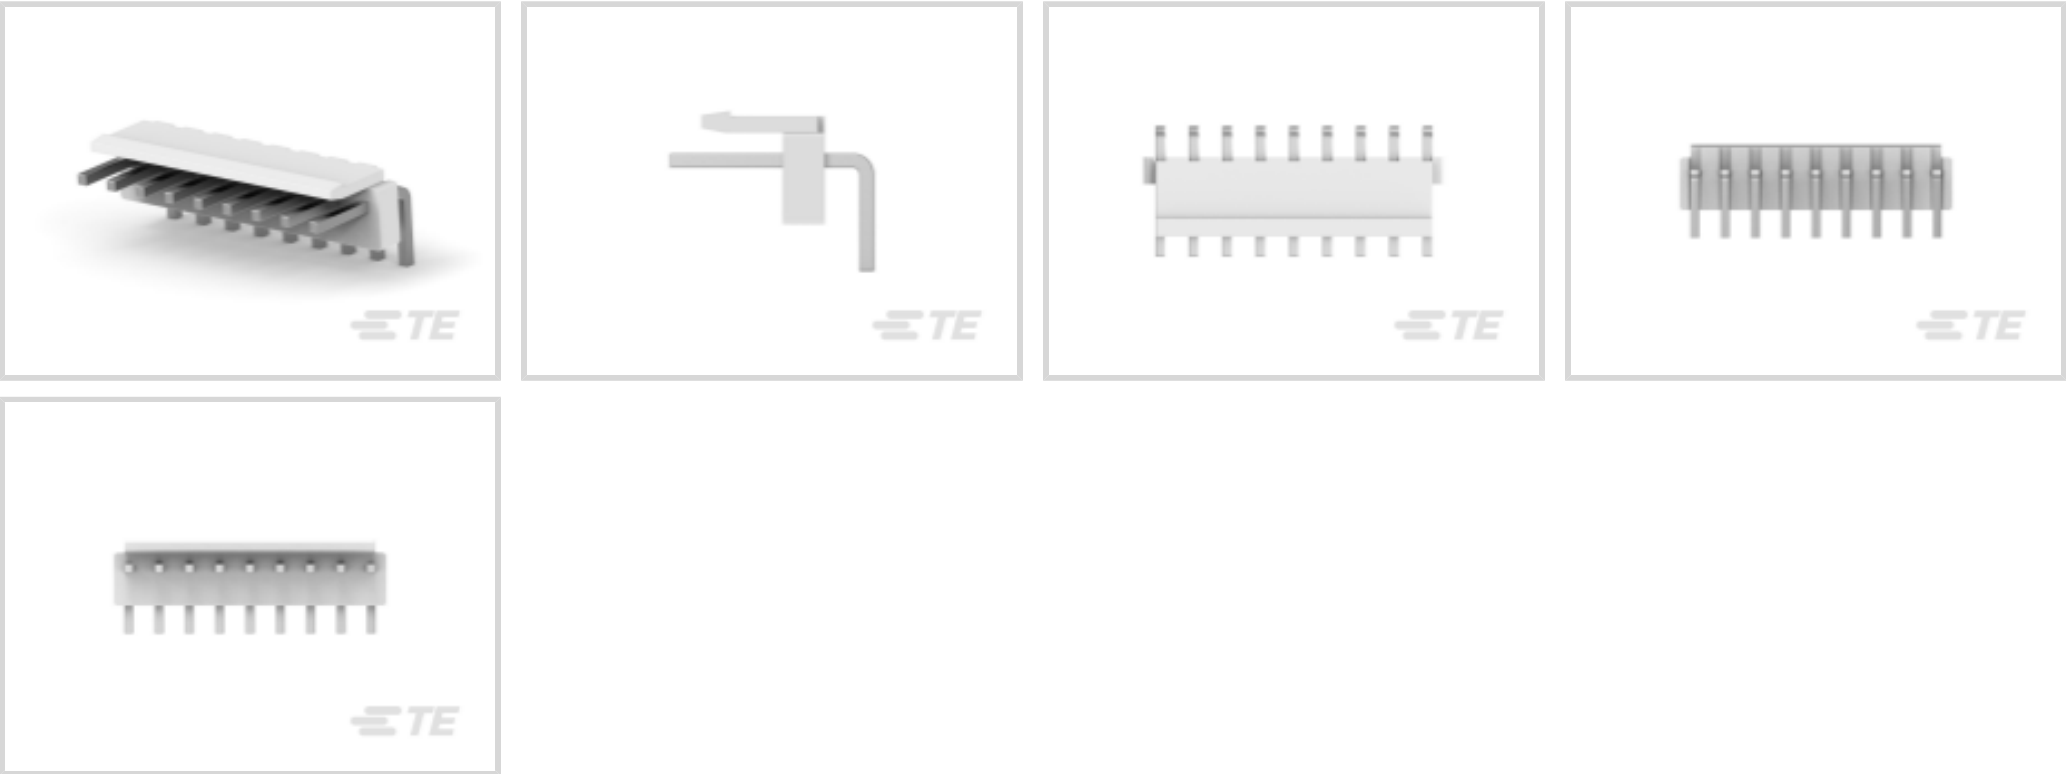

Connector System: **Wire-to-Board**
Number of Positions: **9**
Number of Rows: **1**
Centerline (Pitch): **3.96 mm [.156 in]**
PCB Mount Orientation: **Right Angle**

Features

Product Type Features

Connector Shape	Rectangular
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Power Positions	9
Number of Loaded Positions	9
Number of Positions	9
Number of Rows	1
PCB Mount Orientation	Right Angle

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------



Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Mating Area Length	8.6 mm[.339 in]
Contact Size	1.14mm
PCB Contact Termination Area Plating Material Thickness	2 µm[80 µin]
Contact Layout	Inline
Contact Mating Area Plating Material Thickness	2 µm[80 µin]
Contact Shape & Form	Square
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	8 A

Termination Features

Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Post & Tail Length	3.6 mm[.141 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention	With
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	Without

Housing Features

Housing Material	Nylon
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Length	35.64 mm[1.4 in]
Connector Height	8.21 mm[.323 in]
Connector Width	9.4 mm[.37 in]



PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Shielded	No
Circuit Application	Power

Industry Standards

UL Rating	Recognized
Glow Wire Rating	GWT 750°C (Without Flame)
Compatible With Agency/Standards Products	UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	500
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 2132781-9 09P EP-II HOUSING, NATURAL	 TE Part # 1744416-9 9 POS EP II HSG, GLOW WIRE	 TE Part # 1744036-9 09P ECONOMY POWER .200 CL HSG	 TE Part # 1744109-4 3.96 EP Hdr Assy, 9P, Omitted #8, Blue
 TE Part # 1744525-5 EP RA 05P HEADER ASY NO 3 PIN	 TE Part # 1744544-9 EP II TPA 09P, BLACK	 TE Part # 3-1744525-9 3.96 EP HDR ASSY 9P R/A, NO 6,8 PINS	

Also in the Series | Economy Power

 Connector Contacts(15)	 Connector Hardware(2)	 Insertion & Extraction Tools(1)	 PCB Headers & Receptacles(400)
 Rectangular Connector Housings(1)	 Rectangular Power Connectors(64)	 Wire-to-Board Connector Assemblies & Housings(142)	

Customers Also Bought







TE Part #5787362-9
100 50SR R/A RCP ASSY,RDSN L/F




TE Part #5788800-2
25 HTMSFL ASSY RA 318 (IN,BL)

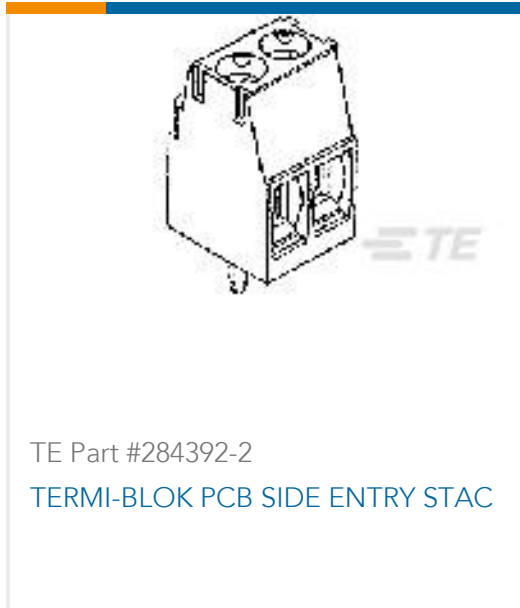

TE Part #284392-2
TERMI-BLOK PCB SIDE ENTRY STAC

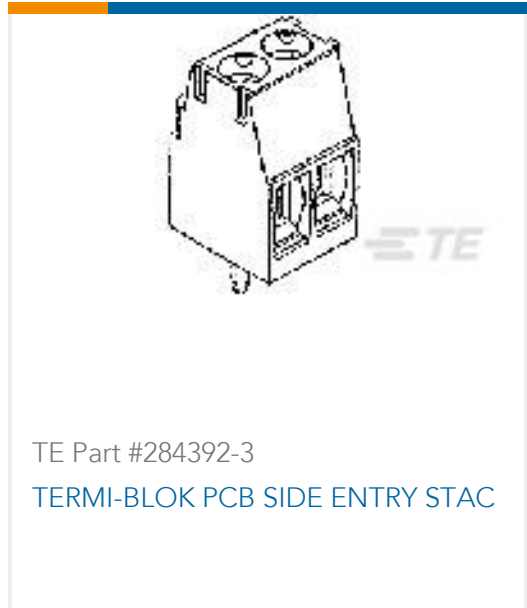

TE Part #284392-3
TERMI-BLOK PCB SIDE ENTRY STAC

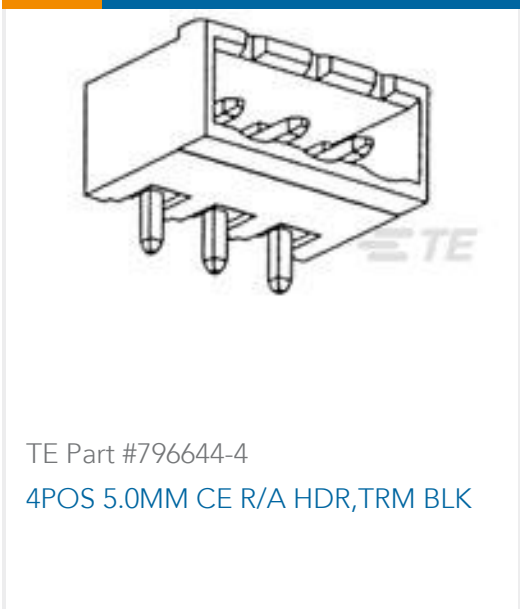

TE Part #796644-4
4POS 5.0MM CE R/A HDR,TRM BLK



TE Part #5-2301996-5
RJ45 JACK INT.MAG. 10/100 LED 1X2 INV.




TE Part #1-2176340-1
CRGCQ 0603 47R 5%



TE Part #1060469-1
5164 5011 09



TE Part #1744489-9
3.96 EP HDR ASY 09P NO PEG, GW

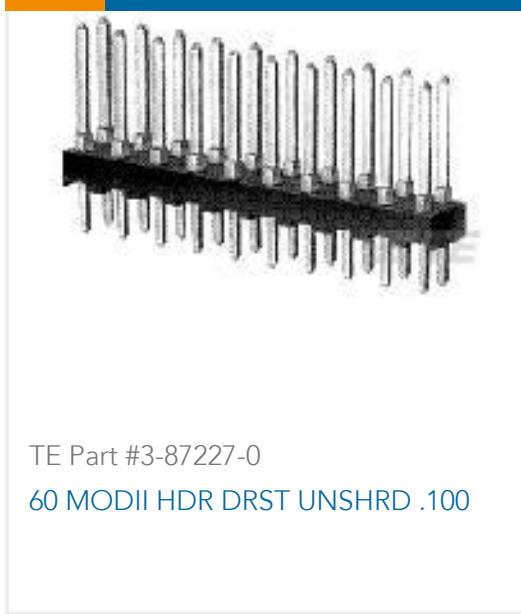

TE Part #3-87227-0
60 MODII HDR DRST UNSHRD .100

Documents

Product Drawings
3.96 EP HDR ASSY 9P R/A, GW

English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1744428-9_E.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_1744428-9_E.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1744428-9_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



Economy Power II (EP II) Glow Wire test compliant connectors

English

1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

Japanese

Application Specification

English

Agency Approvals

VDE Certificate

English