

Parts Drawing

REVISIONS

SYM	ECN No.	MODIFICATION	DATE	ISSUED

Note:

1.Material:

1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0

1.2,Contact: copper alloy,t=0.25mm

1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:

2.1,Current rating:3A/5A Max.

2.2,Dielectric withstanding

voltage: 100 V(ac) for 1 min.

2.3,Contact resistance: 30 mΩ Max.

2.4,Insulation resistance: 100 MΩ Min.

2.5,Total mating force: 3.57 Kg Max.

2.6,Total unmating force: 1.0 Kg Min.

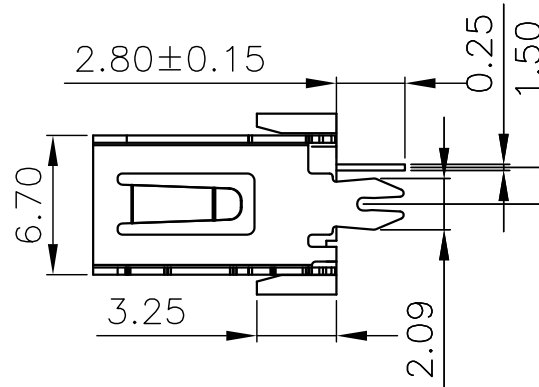
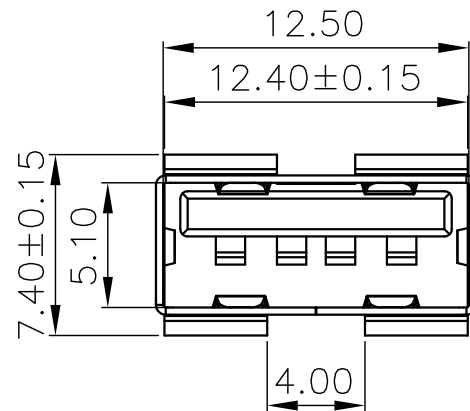
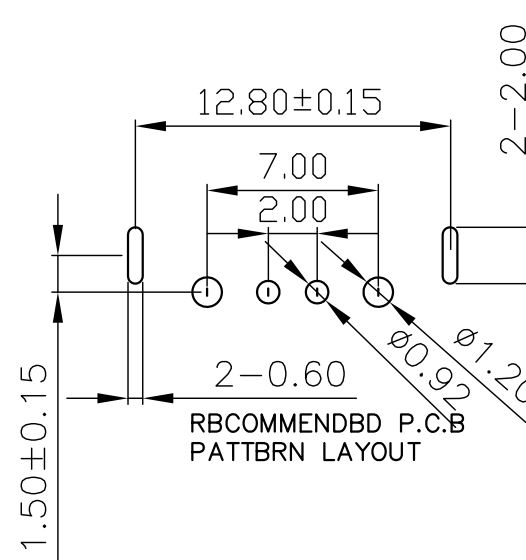
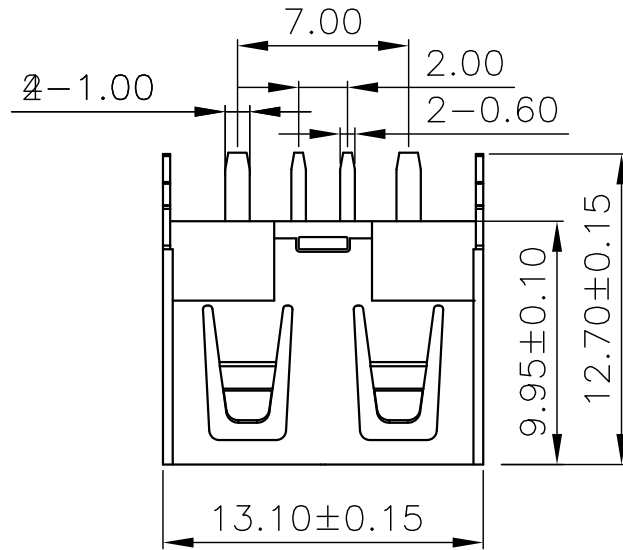
3.Finish:

3.1,Contact: Plated Golg in Mating Area:
Tin On Solder Talls

Shell: Nickel Plating

4.Environmental:

4.1,Temperature range: -55°C~85°C

PART ON:
919-56XAXXX1Y2XX

- 电镀规格: 02, 镀金1u" 04, 镀金3u" 07, 镀金15u" 08, 镀金30u"
- 端子材质: 1, 青铜 2, 磷铜
- 端子规格: D, 90度 Y, 180度 S, SMT贴板
- 塑胶型态: 1, 6.2有耳 6, 6.2无耳
- 塑胶颜色: 01, 白色 02, 黑色 03, 本色
- 塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T
- 对插方向: A, 正向 B, 反向
- 外壳材质: 1, 铁壳 2, 铜壳
- 插口类型: 5, 有边 6, 无边
- 外壳脚型: 1, 前两脚 2, 后两脚 3, 四脚 4, 无脚 5, 鱼叉脚
- 类别: E款

1	916-362A1154Y10210	5	
2		6	
3		7	
4		8	

DRAWN



深圳市精拓金电子有限公司

CHECKED

TITLE

PART NO.


916-362A1154Y10210

APPROVED

AF大电流10.0短体180度
鱼叉脚无边铜壳PBT紫色

DRAWING NO.

R919561A1011Y102

UNIT
mm

TOLERANCE

.XXX±.10, .XX±.25, .X±.38, ANG±5°

SCALE

1:1

SHEET

1 OF 1

SIZE

A4

REV.

X1