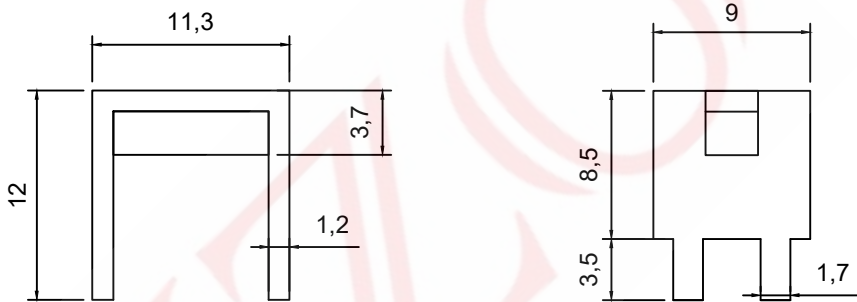
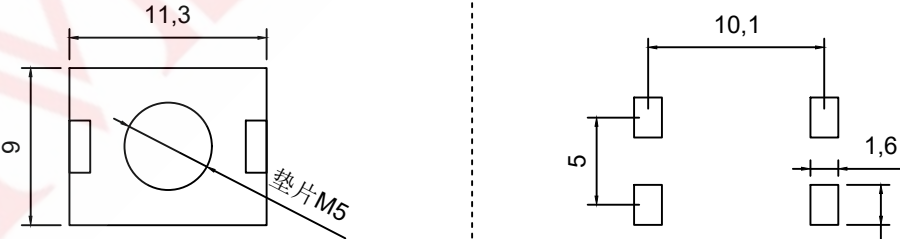
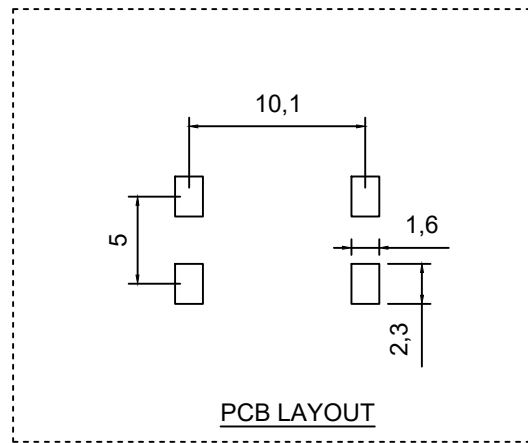


E	1	2	3	4	5	6		7		8	
	SAMZO REAC/ROHS					REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
						A1	NEW	Replace frame			2013.02.12
D	技术要求: Technical requirements:										
	1.打铜底0.5-1UM,镍底2-2.5UM,亮锡3-5UM。 Copper base 0.5 - 1 UM, nickel base 2 - 2.5 UM, bright tin 3 - 5 UM.										
	2.不得有脚变形, 毛刺等缺陷。 There shall be no defects such as pin deformation and burrs.										
C	3.插脚尖部符合可焊性要求。 The tip of the insertion pin shall meet the solderability requirements.										
	4.螺纹需符合通止规要求。 The thread shall meet the requirements of the go and no-go gauge.										
	5.材质: 紫铜T2。 Material: Red copper T2.										
B	6.过载电流: 120A Overload current: 120A										
	7.牙孔规格 M5 The specification of the threaded hole M5										
	8.未标注尺寸公差值按GB/T1184-1996H级 Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996										
A	9.螺丝扭力: 2.8Nm Screw torque: 2.8Nm										
	10.盐雾试验: 48小时 Salt spray test: 48H										
											
											
											
</											