



TO

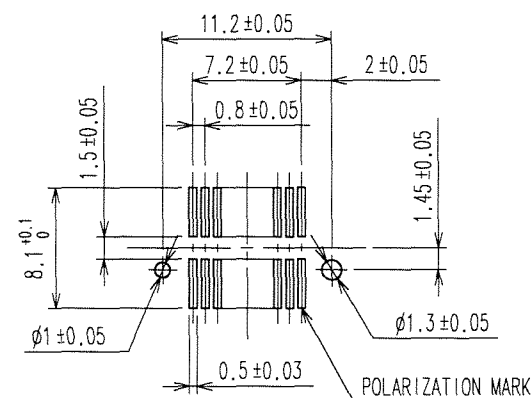



A-A (10:1)

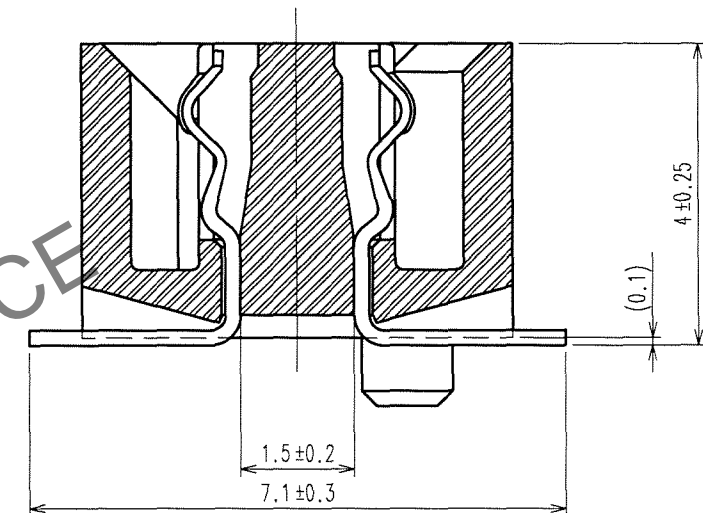

NOTE

- 1 HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.SEE NEXT PAGE FOR DETAILS.
- 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION,ETC.
- 5 FOR MODIFICATION,ETC,PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
- 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.		
					LEAD AREA: TIN-PLATING 1μm min.		
					UNDER PLATING: NICKEL 2μm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.DOI '06.10.05	H. Saito '06.10.05	H. Ogawa '06.10.10	H. Okawa '06.10.10	. .
		DRAWING NO.		PART NO.			
SCALE 2 : 1		EDC3-084977-21		FX6-20S-0.8SV(91)			
UNITS mm		 HIROSE ELECTRIC CO., LTD		CODE NO.			1/2
				CL576-0101-8-91			

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

