

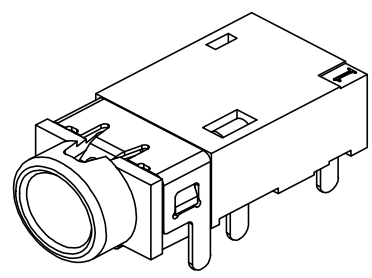


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.28	阿树


触点额定电流: 1A.
1. Contact Current rating: 1A.
接触电阻: 最大50 mΩ
2. Contact Resistance: 50 mΩ MAX.;
绝缘电阻: 100MΩMIN
3. Insulation Resistance: 100MΩ MIN..
耐介质: 50V AC最小值
4. Dielectric Withstanding: 500V AC MIN..
寿命: 至少5000次循环
5. Durability: 5,000 Cycles min..
接头配合力: 最大30N
6. Connector mating forces: 30N MAX..
连接器未接合力: 3N MIN
7. Connector unmating forces: 3N MIN.;

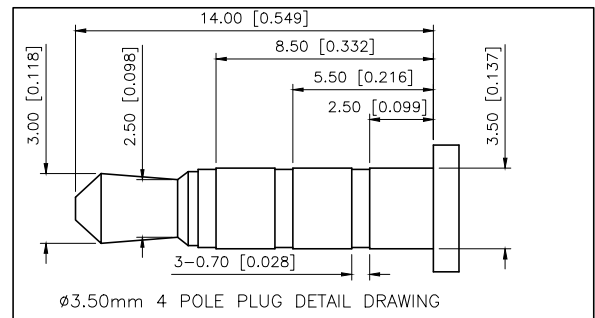


3D VIEW

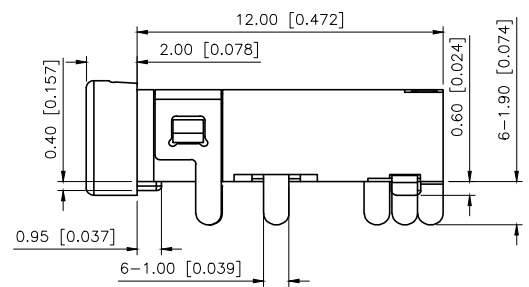

ø3.50mm 4 POLE PLUG DETAIL DRAWING

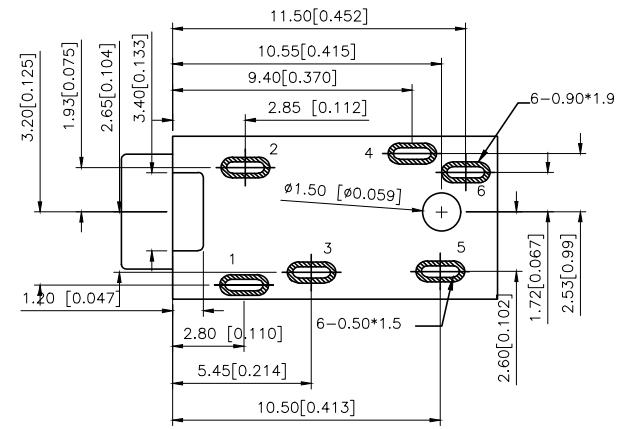

P.C.B LAYOUT TOP VIEW

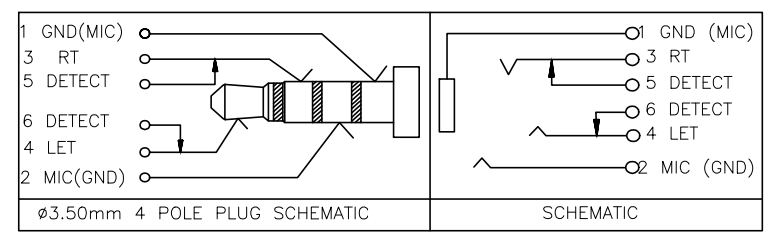

7	Housing	1	PA9T	
6	Terminal-6	1	Phosphor Bronze	Copper alloy: nickel under plating overallgold plating on solder area ; gold platin g on contact area
5	Terminal-5	1	Phosphor Bronze	
4	Terminal-4	1	Phosphor Bronze	
3	Terminal-3	1	Phosphor Bronze	
2	Terminal-2	1	Phosphor Bronze	Copper alloy; the bottom o f the nickel: the whole gold plating
1	Terminal-1	1	Phosphor Bronze	
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-3420
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1