

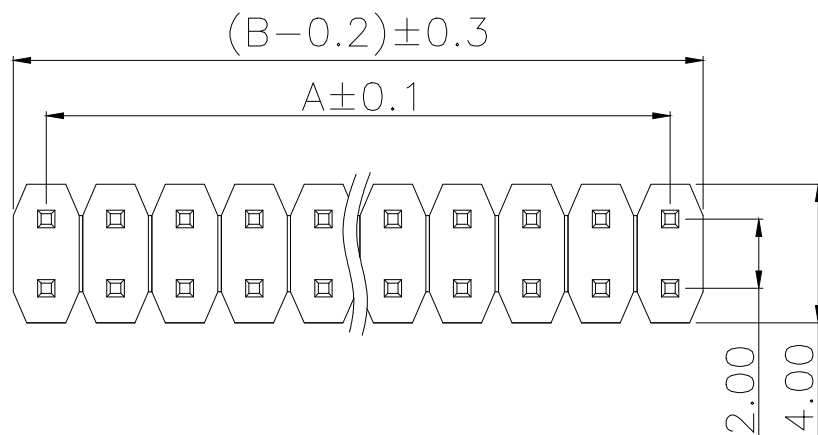
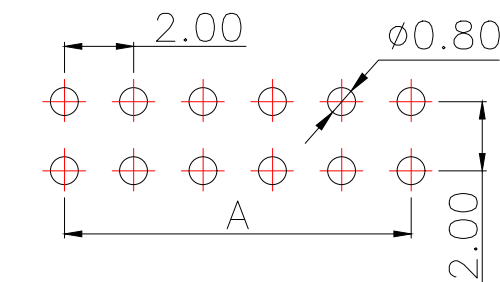


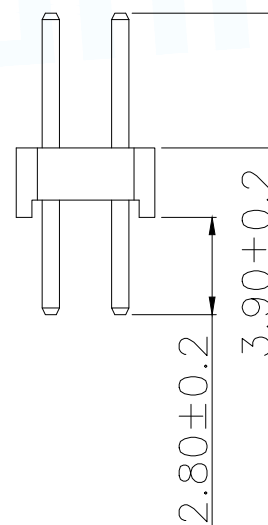

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 500V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

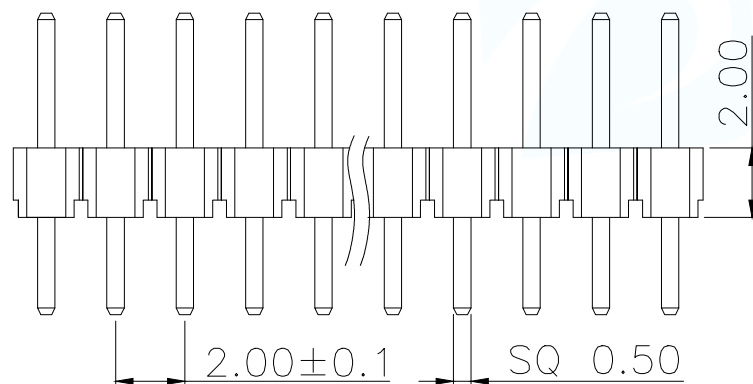

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
PH2.0-01-01PZS	2*1	0.00	2.00
PH2.0-01-02PZS	2*2	2.00	4.00
PH2.0-01-03PZS	2*3	4.00	6.00
PH2.0-01-04PZS	2*4	6.00	8.00
PH2.0-01-05PZS	2*5	8.00	10.00
PH2.0-01-06PZS	2*6	10.00	12.00
PH2.0-01-07PZS	2*7	12.00	14.00
PH2.0-01-08PZS	2*8	14.00	16.00
PH2.0-01-09PZS	2*9	16.00	18.00
.....			
PH2.0-01-40PZS	2*40	(PIN-1)x2.0	(PIN)x2.0

PART NUMBER DESCRIPTION:

PH2.0-01-NPZS

(D=单排; S=双排)
(Z=直脚; W=弯脚)
(PIN数量; 01.....40PIN)
(排针开关)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: 2.0PH H2.0 2xPin 180度 PC2.8 PA3.9 PB2.0 L8.7 6T	
DECIMALS:	ANGLES:	PAR	PH2.0-01-NPZS
X. ± 0.30	X° $\pm 5'$	DWN	
X.X ± 0.25	X.X° $\pm 1'$	CHKD	
X.XX ± 0.20	X.XX° $\pm 0.5'$	APVD	
CUSTOMER COPY		SCALE N:A	UNIT: MM
		SIZE: A4	SHEET: 1F1
			REV: A