


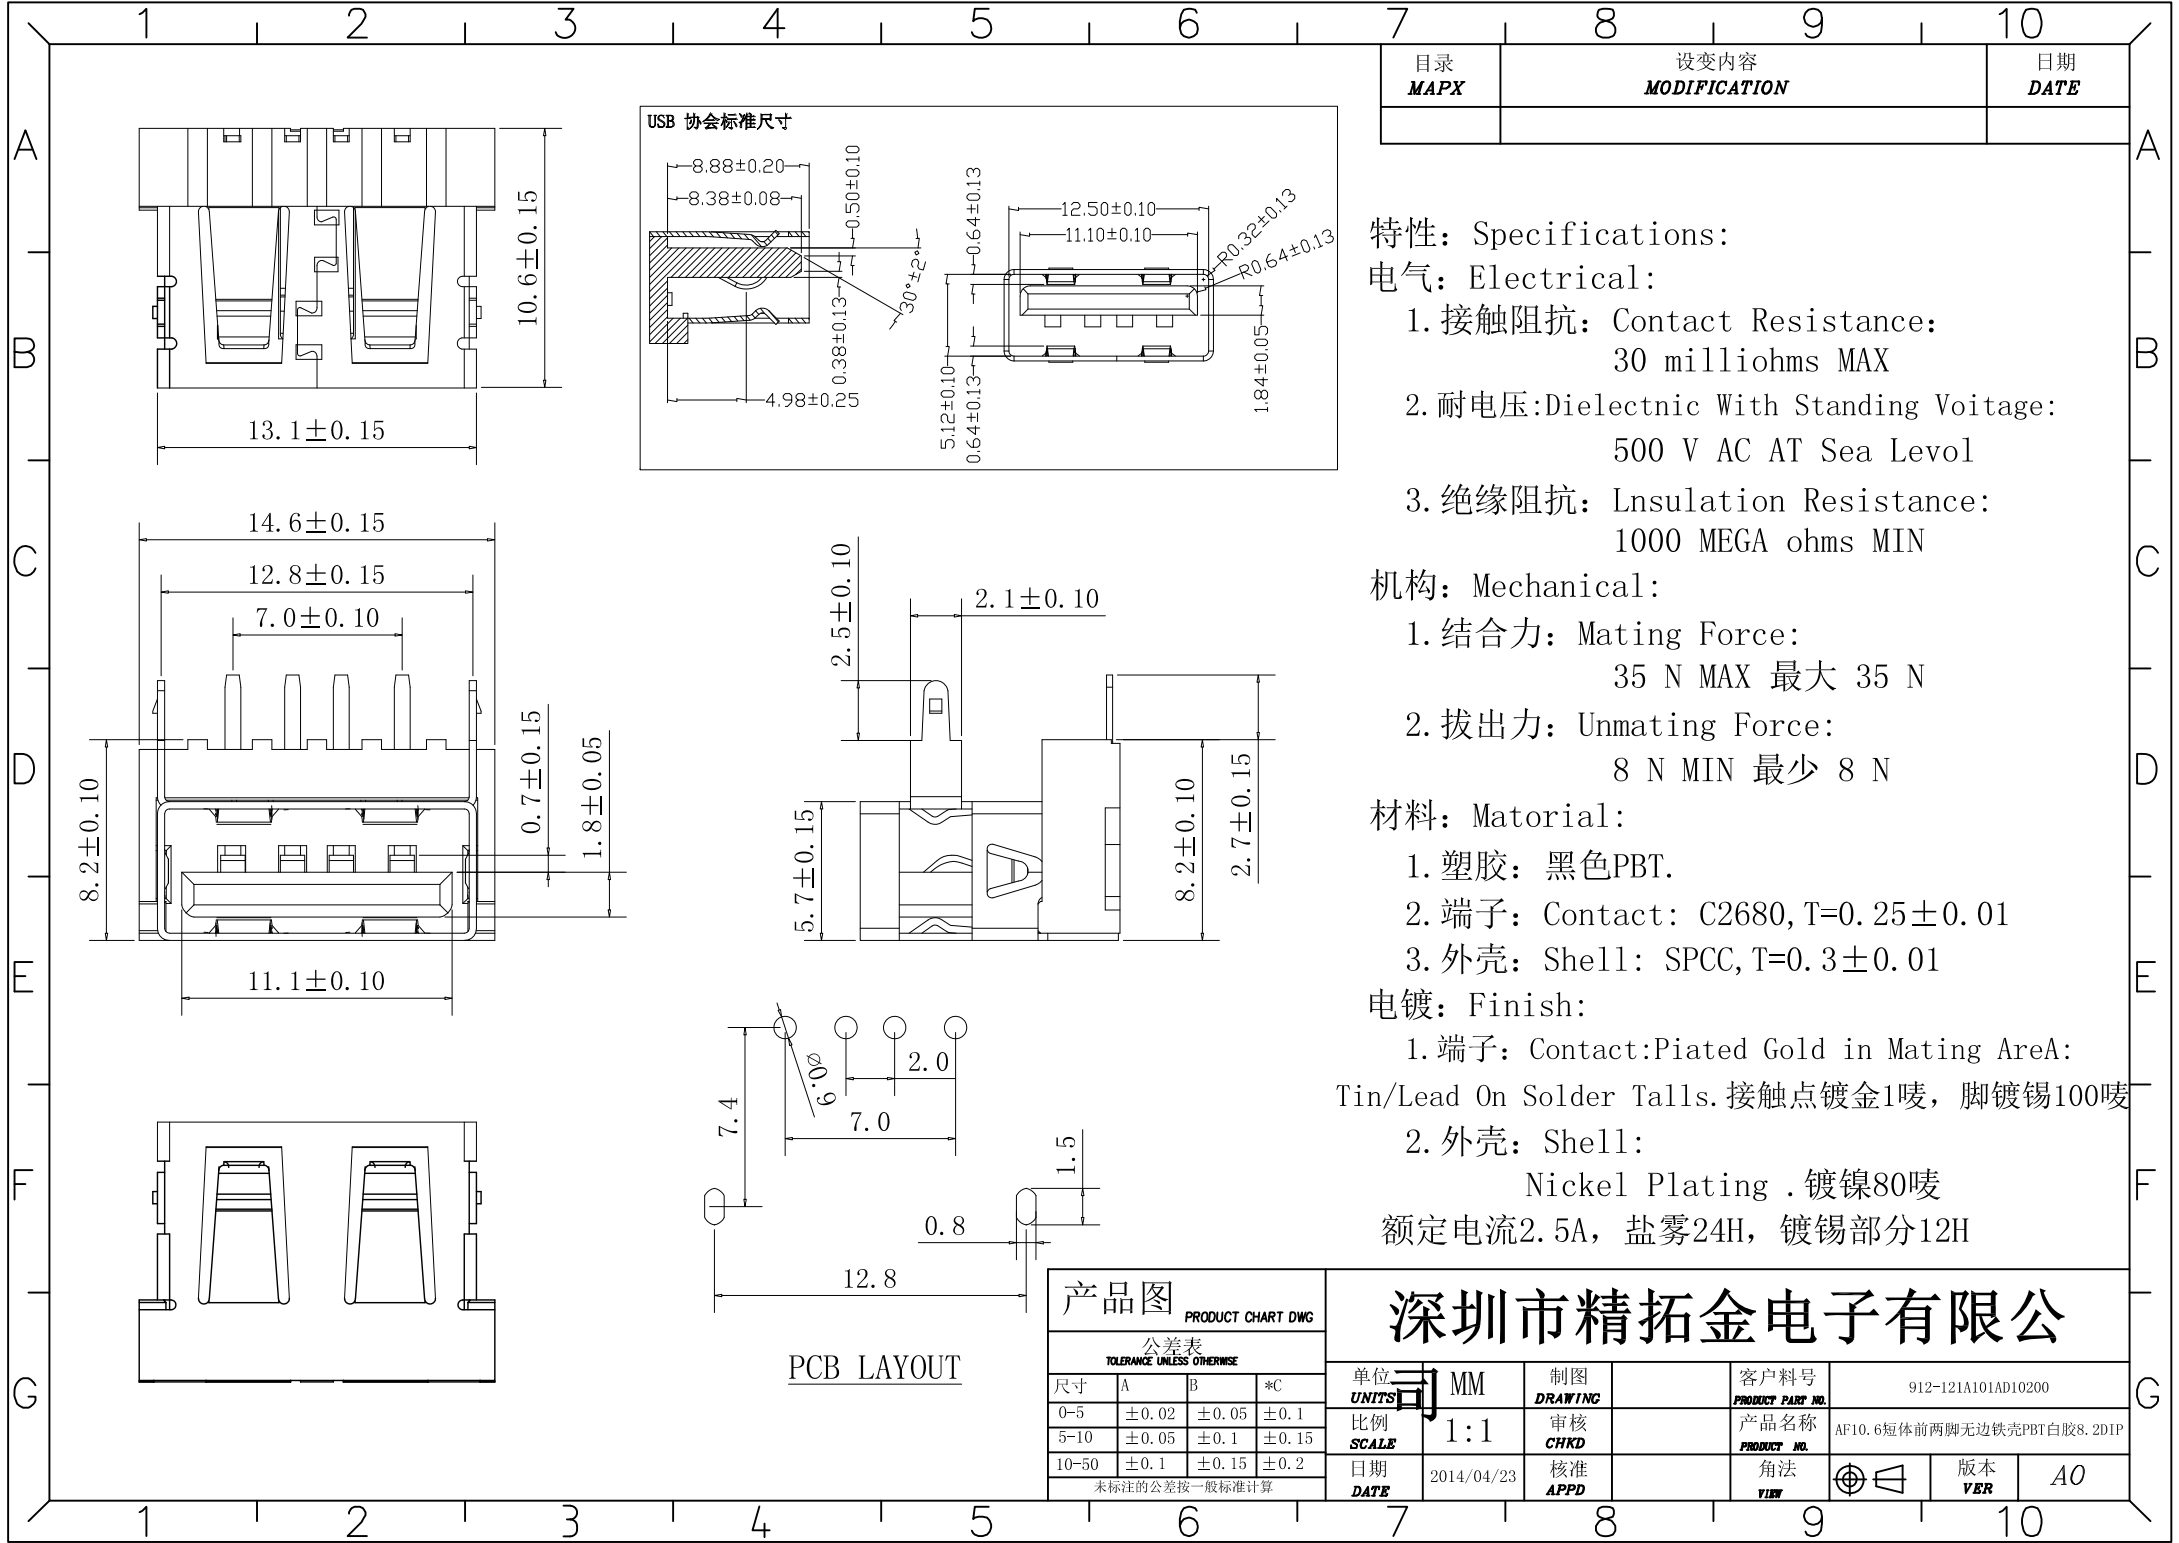

目录 MAPX	设变内容 MODIFICATION	日期 DATE

特性: Specifications:

电气: Electrical:

1. 接触阻抗: Contact Resistance:
30 milliohms MAX
2. 耐电压: Dielectric With Standing Voltage:
500 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MIN

机构: Mechanical:

1. 结合力: Mating Force:
35 N MAX 最大 35 N
2. 拔出力: Unmating Force:
8 N MIN 最少 8 N

材料: Material:

1. 塑胶: 黑色PBT.
2. 端子: Contact: C2680, T=0.25±0.01
3. 外壳: Shell: SPCC, T=0.3±0.01

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area:
Tin/Lead On Solder Tails. 接触点镀金1μ, 脚镀锡100μ
2. 外壳: Shell:
Nickel Plating . 镀镍80μ
额定电流2.5A, 盐雾24H, 镀锡部分12H

产品图 PRODUCT CHART DWG		深圳市精拓金电子有限公司			
公差表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	客户料号 PRODUCT PART NO.	912-121A101AD10200
尺寸 DIMENSION	A	B	*C	产品名称 PRODUCT NAME	AF10.6短体前两脚无边铁壳PBT白胶8.2DIP
0-5	±0.02	±0.05	±0.1	比例 SCALE	1:1
5-10	±0.05	±0.1	±0.15	日期 DATE	2014/04/23
10-50	±0.1	±0.15	±0.2	核准 APPD	
未标注的公差按一般标准计算		角法 VIEW		版本 VER	A0