


4		3		2		1													
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS											
© COPYRIGHT - By -		ALL RIGHTS RESERVED.		E		B		P		LTR		DESCRIPTION		DATE		DWN		APVD	
										B2		ECR-15-012328		19AUG2015		KR		TN	
HB01AE 28.8 max 9.2 3.0 max MARKING FACE LEAD LENGTH 20mm MIN DESCRIPTION: LEAD MATERIAL: LEAD CROSS-SECTION: HYBRID PROTECTION: MARKING: HIGH VOLTAGE THICK FILM RESISTOR. TINNED COPPER WIRE 0.6 +/-0.05 DIA CONFORMAL EPOXY COATING AS SHOWN BELOW ON MARKING FACE HB01A VAL. TOL. TCR DATE CODE HB01AS 26.0 max 8.4 max 1.5 max MARKING FACE LEAD LENGTH 20mm MIN DESCRIPTION: LEAD MATERIAL: LEAD CROSS-SECTION: HYBRID PROTECTION: MARKING: HIGH VOLTAGE THICK FILM RESISTOR. TINNED COPPER WIRE 0.6 +/-0.05 DIA SCREEN PRINTED SILICONE COATING AS SHOWN BELOW ON MARKING FACE HB01A VAL. TOL. TCR DATE CODE																			


HB01RE

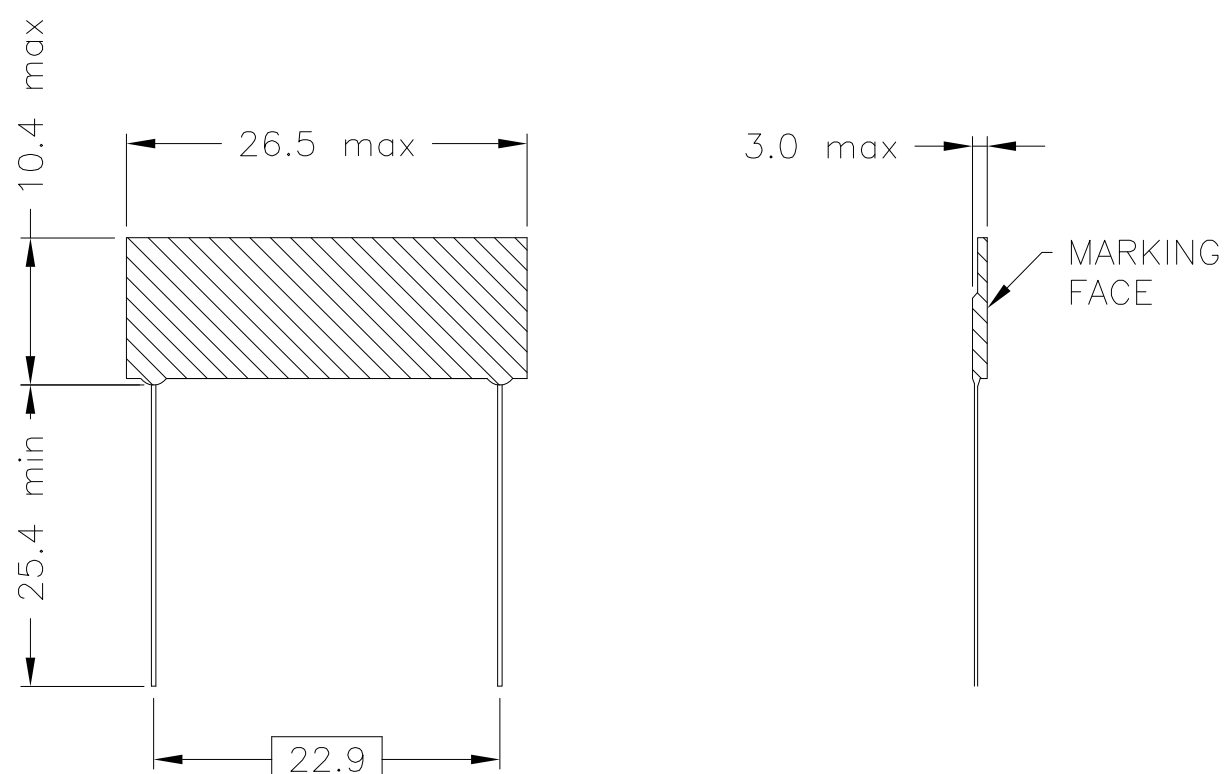

DESCRIPTION:	HIGH VOLTAGE THICK FILM RESISTOR.
LEAD MATERIAL:	TINNED COPPER WIRE
LEAD CROSS-SECTION:	0.6 +/-0.05 DIA
HYBRID PROTECTION:	CONFORMAL EPOXY COATING
MARKING:	AS SHOWN BELOW ON MARKING FACE


HB01R
VAL. TOL. TCR
DATE CODE

HB01RS

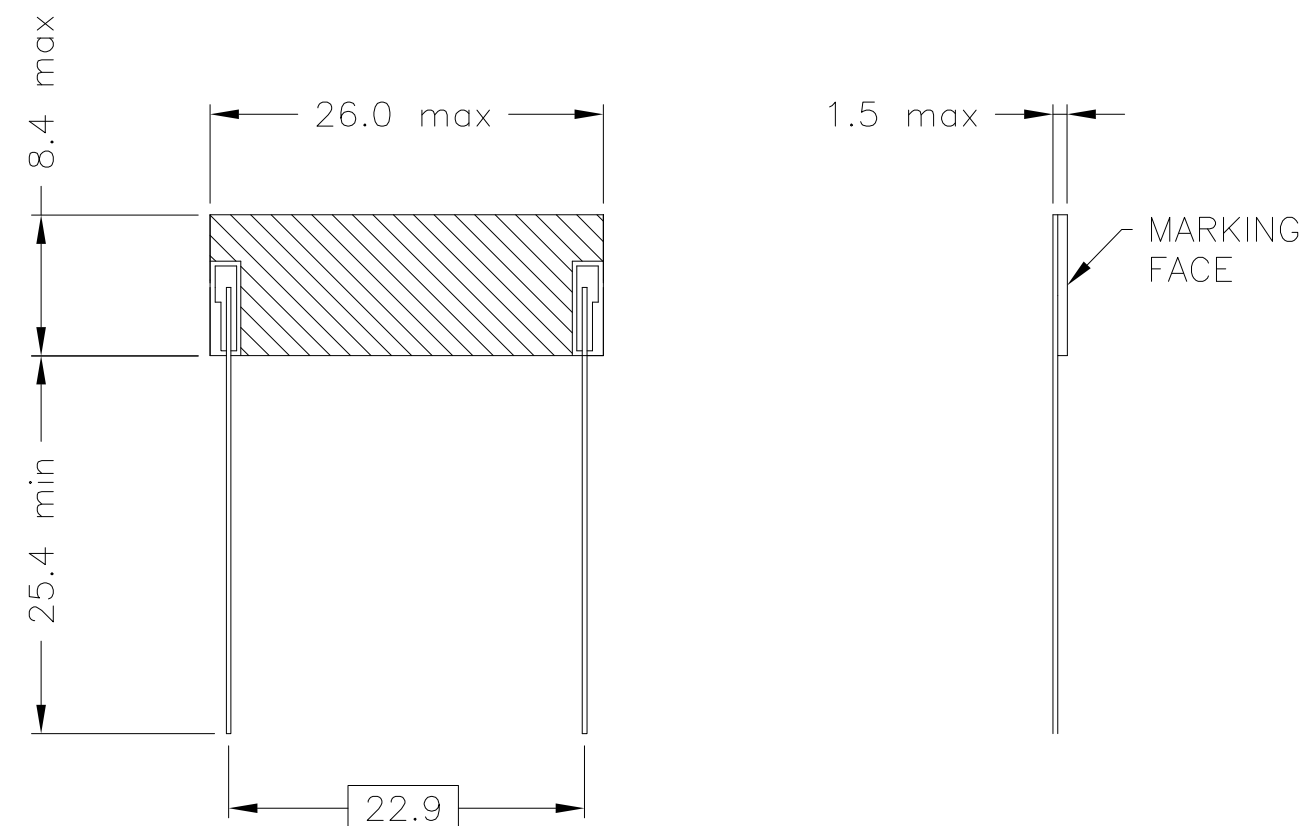

DESCRIPTION:	HIGH VOLTAGE THICK FILM RESISTOR.
LEAD MATERIAL:	TINNED COPPER WIRE
LEAD CROSS-SECTION:	0.6 $\pm$ 0.05 DIA
HYBRID PROTECTION:	SCREEN PRINTED SILICONE COATING
MARKING:	AS SHOWN BELOW ON MARKING FACE

HB01R
VAL. TOL. TCR
DATE CODE

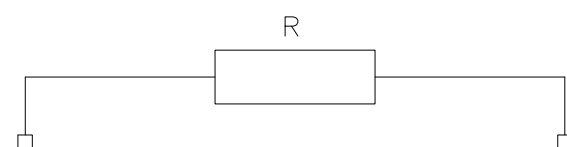

TYPICAL SCHEMATIC

FOR A SPECIFIC PN FOR A RESISTANCE VALUE AND TOLERANCE, PLEASE REFER TO DMF.

RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 31OCT2005
DAVE KENNEDY

CHK	01NOV05
-----	---------

APVD	01NOV05
------	---------

J CATCH
PRODUCT SPEC

APPLICATION SPEC

WEIGHT	
--------	--

CUSTOMER DRAWING

5	NAME	
		HB01

SIZE	CAGE CODE	DRAWING NO
A3	00779	C-1625958

RESTRICTED TO

2	REV B2
---	--------



TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HB01RE-100M](#)