

3.3V PECL Ultra Low Jitter 156.25MHz XO

UX5040GE01



5.0 x 3.2mm Ceramic SMD

ASSP XO™ for 40Gb Ethernet



Product Features

- 3.3V, 156.25MHz
- Ultra low phase jitter (RMS)- 0.2ps max. (10kHz ~ 1MHz)
- Pb-free & RoHS compliant
- Industrial temperature range


Product Description

The UX5040GE01 is a crystal oscillator that achieves superb low jitter for 40GbE applications. The output clock signal, generated internally with a patented oscillator design, is compatible with LVPECL logic levels. The device, available on tape and reel, is contained in a 5.0 x 3.2mm surface-mount ceramic package.


Applications

- 40 Gigabit Ethernet Switches / Routers
- 40 Gigabit Ethernet Data Center

Package: (Scale: none; dimensions are in mm)

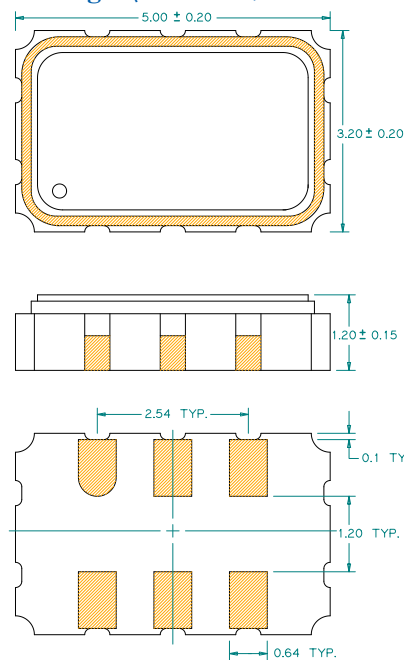

Recommended Land Pattern:



Pin Functions:

Pin	Function
1	OE
2	NC
3	V _{EE}
4	Q Output
5	$\bar{Q}$ Output
6	V _{CC}

*Extended high frequency power decoupling is recommended (see test circuit for minimum recommendation). To ensure optimal performance, do not route RF traces beneath the package.

Part Ordering Information:

UX5040GE01



Electrical Performance

Parameter	Min.	Typ.	Max.	Units	Notes
Output Frequency		156.25		MHz	
Supply Voltage	2.97	3.30	3.63	V	
Supply Current, Output Enabled		60	75	mA	
Supply Current, Output Disabled			25	mA	
Frequency Stability			±50	ppm	See Note 1 below
Operating Temperature Range	-40		+85	°C	Industrial
Output Logic 0, VOL			V _{CC} - 1.620	V	0 to +85°C
			V _{CC} - 1.555	V	-40 to 0°C
Output Logic 1, VOH	V _{CC} - 1.025			V	0 to +85°C
	V _{CC} - 1.085			V	-40 to +0°C
Output Load	50Ω to V _{CC} - 2V				output requires termination
Duty Cycle	45		55	%	Measured 50% V _{DD}
Rise and Fall Time		0.5	0.85	ns	Measured 20/80% of waveform
Jitter, Phase RMS (1-σ)		0.2	0.3	ps	12 kHz to 20 MHz frequency band
		0.1	0.2		10 kHz to 1 MHz frequency band
Jitter, pk-pk		25	40	ps	100,000 random periods

Notes:

- Stability includes all combinations of operating temperature, load changes, rated input (supply) voltage changes, initial calibration tolerance (25°C), aging (5 year at 40°C average effective ambient temperature), shock and vibration.
- For specifications other than those listed, please contact sales.

Output Enable / Disable Function

Parameter	Min.	Typ.	Max.	Units	Notes
Input Voltage (pin 1), Output Enable	2.2			V	or open
Input Voltage (pin 1), Output Disable (low power standby)			0.8	V	Outputs disabled to Hi-Z
Internal Pullup Resistance	50			kΩ	
Output Disable Delay			200	ns	
Output Enable Delay			10	ms	

Absolute Maximum Ratings

Parameter	Min.	Typ.	Max.	Units	Notes
Storage Temperature	-55		+125	°C	

For the latest product information visit: <http://www.pericom.com/products/crystals-and-crystal-oscillators/assp-xo/?part=UX5040GE01>

For test circuit go to: http://www.pericom.com/assets/sre/tc_pecl.pdf

For soldering reflow profile and reliability test ratings go to: <http://www.pericom.com/assets/sre/reflow.pdf>

For typical phase noise go to: http://www.pericom.com/assets/sre/pn_UX5040GE01.pdf

For tape and reel information go to: http://www.pericom.com/assets/sre/tr_5032_xo.pdf

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

[PI2SSD3212ZLE](#) [PI2SSD3212NCE](#) [FQ2500016](#) [NX7032C0200.000000](#) [PXA000010](#) [FN2500246](#) [FN1000064](#)
[NX7031E0125.000000](#) [FN2500149](#) [FN5000145](#) [FN5000121](#) [FNA000065](#) [PXC500007](#) [JT2553P0016.369000](#)
[FP0800018](#) [JT15260001](#) [PS8A0094WEX](#) [KX2513E0032.768000](#) [PT7C5022A1ATAEX](#) [PT7M7479LBTAEX](#)
[PT7M8401EE1828TA6EX](#) [PT8A3517BWEX](#) [PT8A3280CWEX](#) [PI6LC5011-01LEX](#) [PI6LC48S04ZHIEX](#)
[PI6LC48P03AZHIE](#) [PS8A0102BWEX](#) [PT8A3263AWE](#) [PT8A3301BWEX](#) [PT8A3230WEX](#) [PT8A3287BWEX](#)
[PT8A3286WEX](#) [PT8A2766JTAEX](#) [PS8A0070PE](#) [PI7C9X2G608ELBEVB-X1U](#) [PT8A3247WEX](#) [PT8A3283WEX](#)
[PT7M8218B20TAEX](#) [PS8AES02WEX](#) [PT8A3301CWEX](#) [PI3USB32224AXEAEX](#) [PS8A0087WEX](#)
[PT7C5006ANEWEX](#) [PI2SSD3212ZLEX](#) [PT7M6834GD1C3EX](#) [PT7C5006ANDWEX](#) [PT8A3307HWEX](#)
[PT8A3518BWEX](#) [PT8A3519AWEX](#) [PS8A0021WEX](#) [PS8A0020WEX](#) [PS8A0012WEX](#) [PT8A3516FWEX](#)
[PT8A3301AWEX](#) [PI5A3167CTAEX](#) [PI6LC48P03AZHIEX](#) [PS8A0132RWEX](#) [PT7V4035WEX](#) [PT8A3302AWEX](#)
[PT7M8218B11TAEX](#) [PT7M8218B12TAEX](#) [PS8A0032PE](#) [PT7M6529NLXVEX](#) [PT8A9001QE](#) [PT8A3290WEX](#)
[PT8A3519BWEX](#) [PI3HDX1204EZLE](#) [PT8A3263AWEX](#) [PT8A3251WEX](#) [PS8A0024WEX](#) [PS8A0084WEX](#)
[PI7C9X2G308GPAEVB](#) [PT8A3515BWEX](#) [PI6LC48H02ALIEX](#) [PI6LC48P0101LIEX](#) [PT8A3281WEX](#) [PT8A3517AWEX](#)
[PT8A3285WEX](#) [PT8A2646WEX](#) [PT8A2703WEX](#) [PI5USB1468AZAEX](#) [PI3USB9281AGEEX](#) [PS8A0026WEX](#)
[PI7C9X2G608ELBEVB-X4U](#) [PS8A0085WEX](#) [PT8A3241WEX](#) [PT7M6832WD1C3EX](#) [PS8A0023PE](#) [PS8A0011WEX](#)
[JT255CF0026.000000](#) [PI3SSD1914NKE](#) [PS8A0081WEX](#) [PT7M7479HBTAEX](#) [PT8A3236WEX](#) [PI6LC48C51LEX](#)
[PT8A3305LWEX](#) [PT8A3303AWEX](#) [PT8A3516BWEX](#) [PT8A2621WEX](#) [PS8A0025WEX](#)