


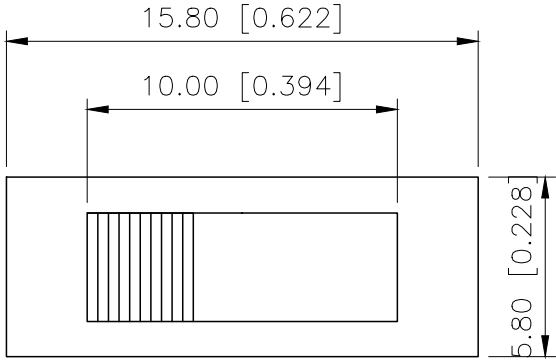


| REVISIONS |         |          |                  |            |        |
|-----------|---------|----------|------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION      | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE  | /          | /      |
| A1        | N/A     |          | 产品尺寸变更, 图面升级整理图面 | 2024.11.18 | 阿树     |

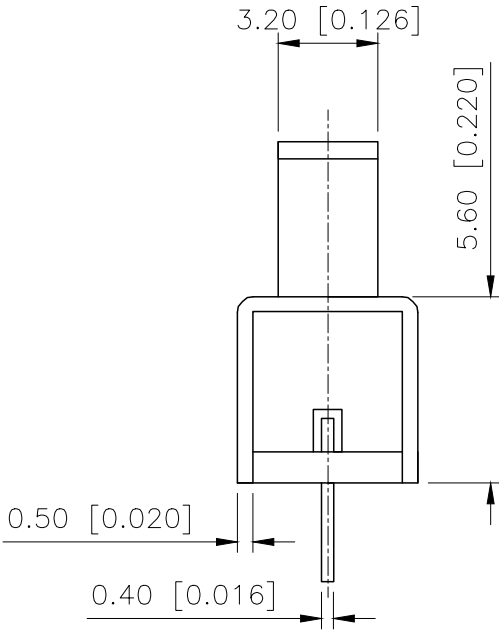

SS13F06—

L(MM)  
2 ~ 10

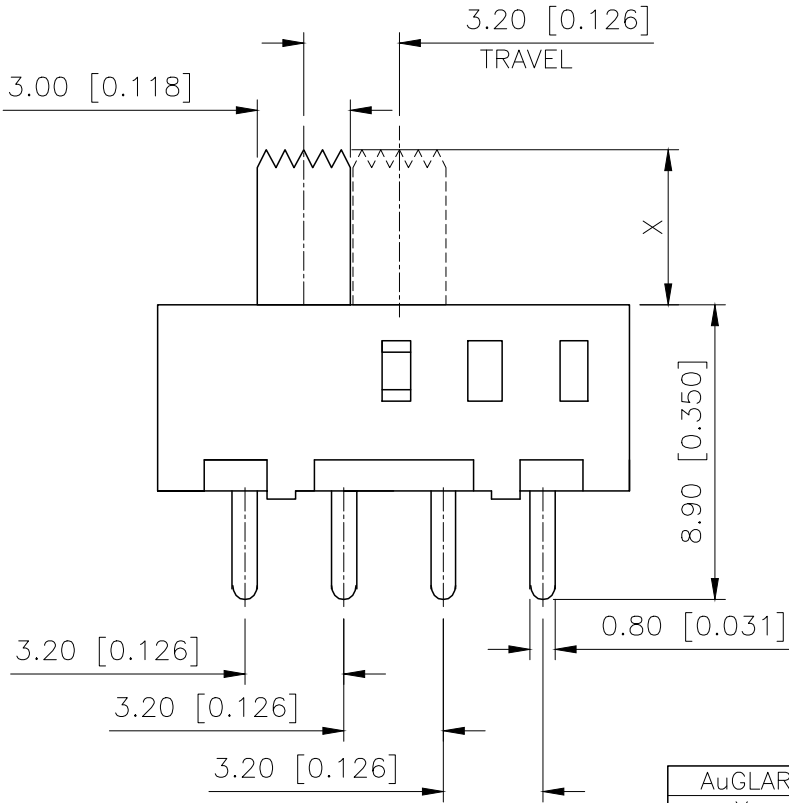

|                     |             |
|---------------------|-------------|
| RATING              | 0.3A 50V DC |
| CIRCUIT             | 1P3T        |
| CONTACT RESISITANCE | 100MΩ MAX   |
| TRAVEL              | 2MM         |
| OPERATING FORCE     | 250±100gf   |
| OPERATING LIFE      | 10000       |

|    |              |     |              |           |
|----|--------------|-----|--------------|-----------|
| 6  | Spring       | 1   | Steel wire   | NATURAL   |
| 5  | Teminal bass | 1   | Phenol resin | NATURAL   |
| 4  | Knob         | 1   | POM          | G2-10     |
| 3  | Contact clip | 1   | BSP          | AG Plated |
| 2  | Terminal     | 4   | BSP          | AG Plated |
| 1  | Frame        | 1   | SPCC         | Ni Plated |
| NO | NAME         | QTY | MATERIAL     | Remark    |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERAUCES |       |



|          |    |             |              |
|----------|----|-------------|--------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE:  |
| CHECKED  |    | UNIT: mm/in | SLIDE SEITCH |
| APPROVED |    | SIZE: A4    | PART NO.:    |
|          |    |             | SS13F06X     |
|          |    |             | DWG NO.:     |