

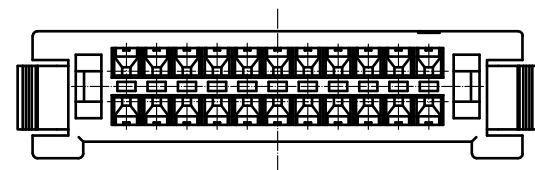
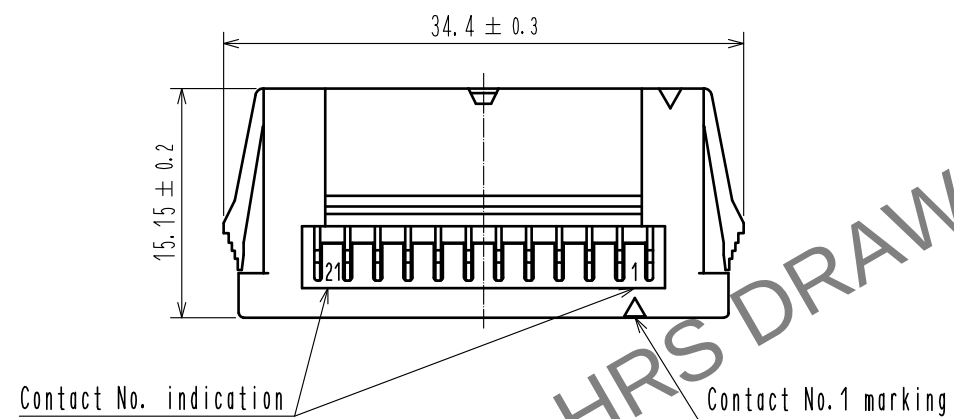


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

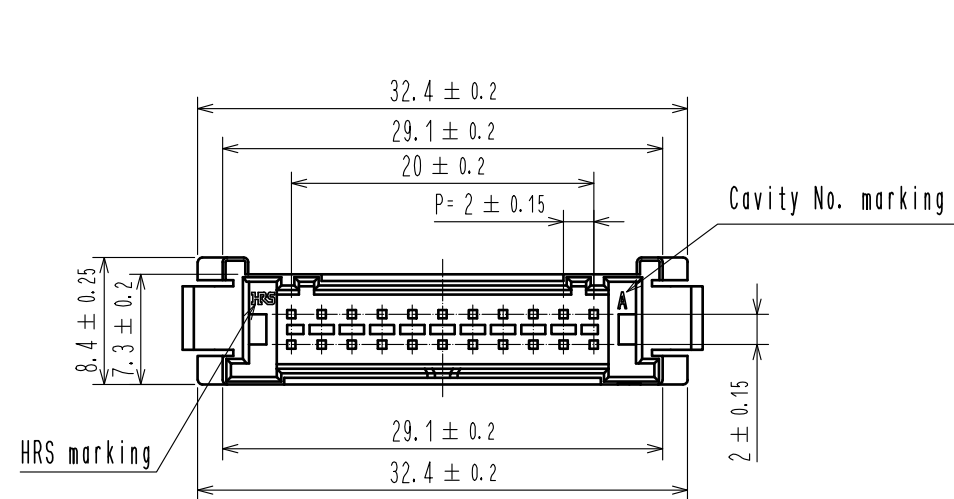


1 Recommended panel cutout dimension
3

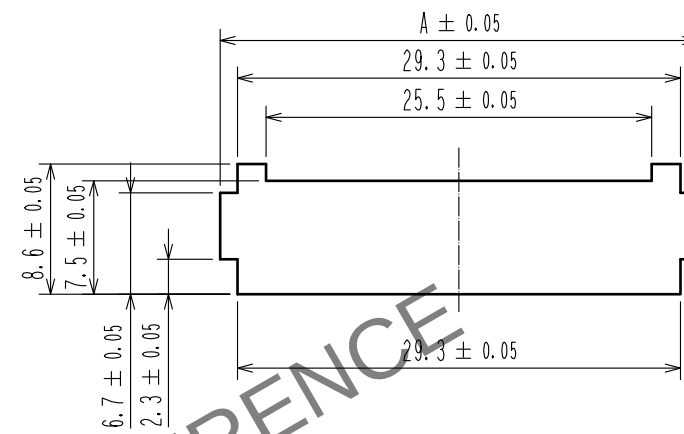

2

Panel thickness	A
0.5~0.8	31.6
0.9~1.3	32.1
1.4~1.8	32.5
1.9~2.3	32.9

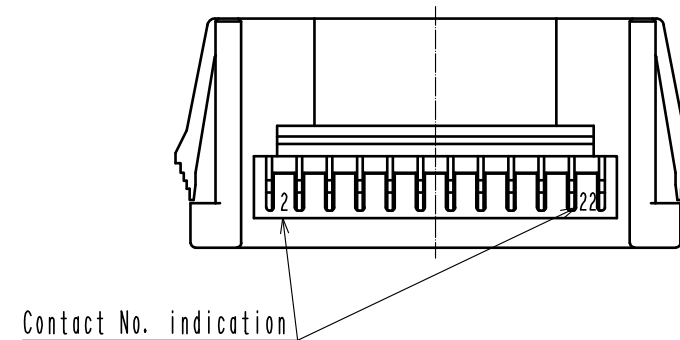

- Note
- 1 Please use non-radius side for the panel hooking area.
 - 2 Applicable panel thicknessing is 2.3 to 0.5 mm.
 - 3 Consult hirose for the other panel cutout designs than recommended one.
 4. Per pack : 100 pieces.
 5. UL(File No. E52653).
C-UL(File No. E52653) authorization article



NO.		MATERIAL		FINISH . REMARKS		1	PBT		UL94V-0. BLACK						
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS					
UNITS mm				SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00004547			DESIGNED TS. MIYAKI		CHECKED SZ. ONO		DATE 20181225	
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA		20160601		DRAWING NO.		EDC-366291-00-00					
				CHECKED : YN. TAKASHITA		20160601		PART NO.		DF51-22DEP-2C					
				DESIGNED : TT. OHSAKO		20160601		CODE NO.		CL543-5080-0-00					
				DRAWN : TT. OHSAKO		20160601				 					