
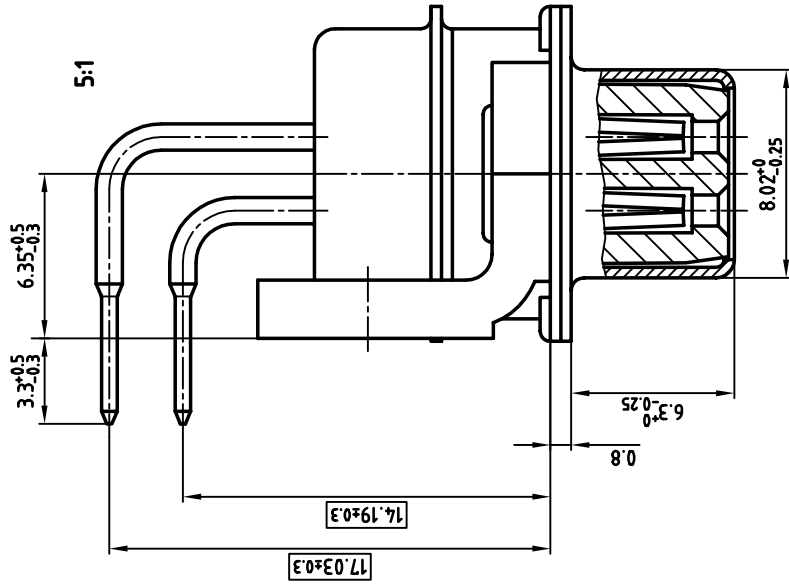

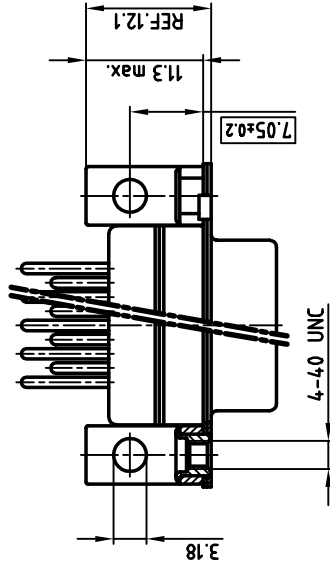


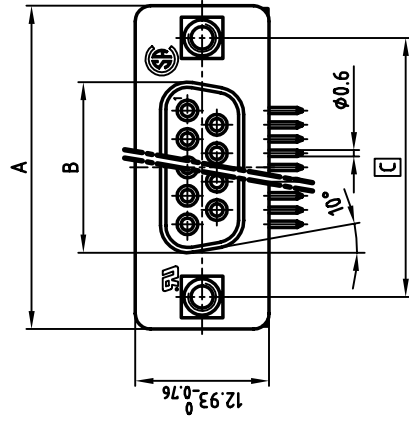

NOTES:

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
5. METAL BRACKET: STEEL; min. 320μ" TIN over 80μ" NICKEL
6. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
7. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K111UA
8. CAPACITANCE: 2x1300pF ±20%
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

POS.	A -0.76	B -0.25	C	Part-NO.
9	31.19	16.46	25.00 ^{+0.12} / _{-0.13}	242A26060X
15	39.52	24.79	33.30 ^{+0.15} / _{-0.1}	242A26070X
25	53.42	38.50	47.04 ^{+0.13} / _{-0.1}	242A26080X
37	69.70	54.96	63.50 ^{+0.13} / _{-0.1}	242A26090X

CONEC CORPORATION BRAMPTON, ONTARIO				tolerance	scale: 2:1 (5:1)	material: SEE NOTES
rev.	description	date	name	2001	date	name
					09.04.	Pareil
					09.04.	E. Mickenbecker
					norm	DIN 41652
					d-old	
CONEC AutoCAD 2000 DIN-A 3 sh:1/1				dwg no: 24K1A106A		
part no: SEE TABLE				title: D-SUB Π FILTER FEMALE 90° 0.590inch 9-37pos. with threaded insert and metal bracket		

used for: D-SUB Π FILTER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[242A26070X](#)