


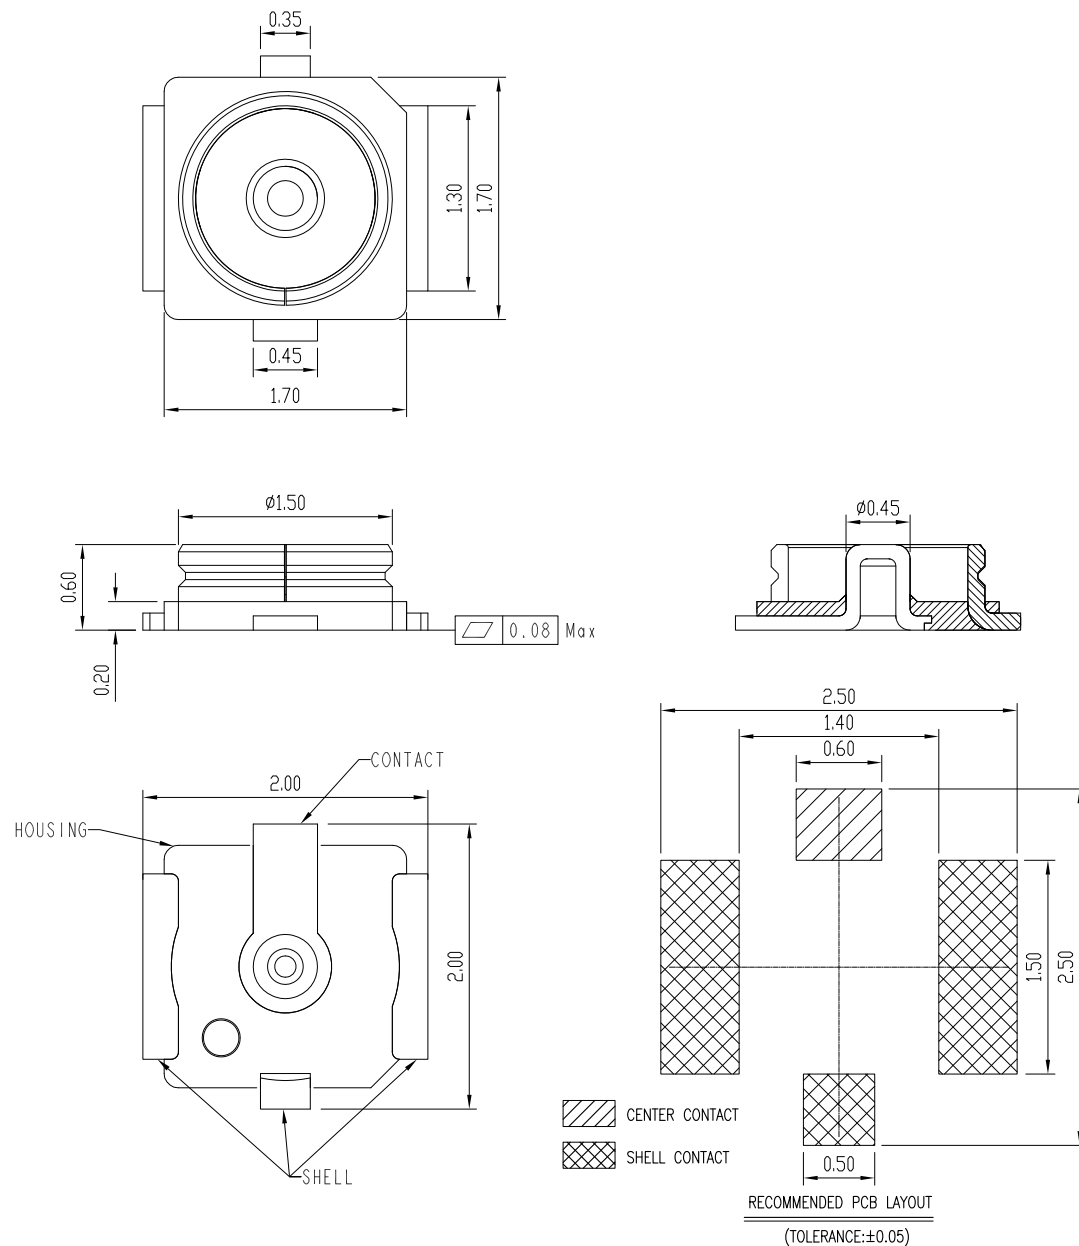

NOTES :

1.0. RATING :

- 1.1. VOLTAGE : 60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE : -40°C TO +85°C

2.0. ALL DIMENSIONS SHOULD BE CONTROLLED IN FAI.:

3.0. MARKED ∇^* SHOULD BE CONTROLLED BY QIP.:

4.0. MATERIAL SEE BILL OF MATERIAL :



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RF四代板端天线座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYCW14-RF1717-060B
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-1811091157
SCALE: 1:1	SIZE: A4		SHEET NO.	1 OF 1