
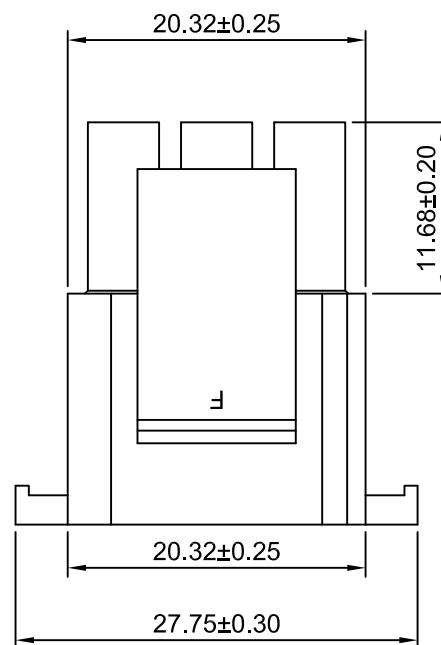
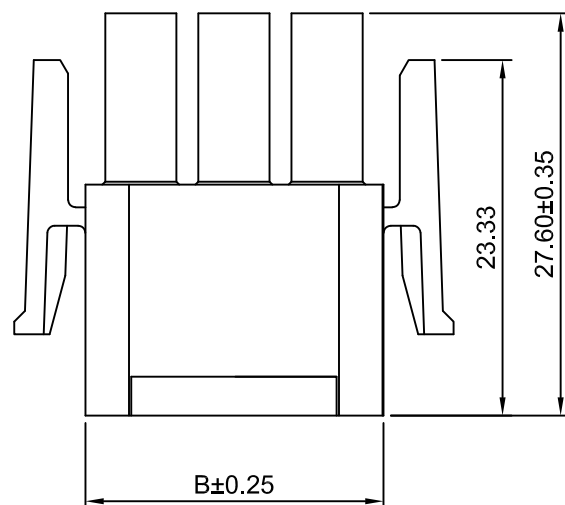


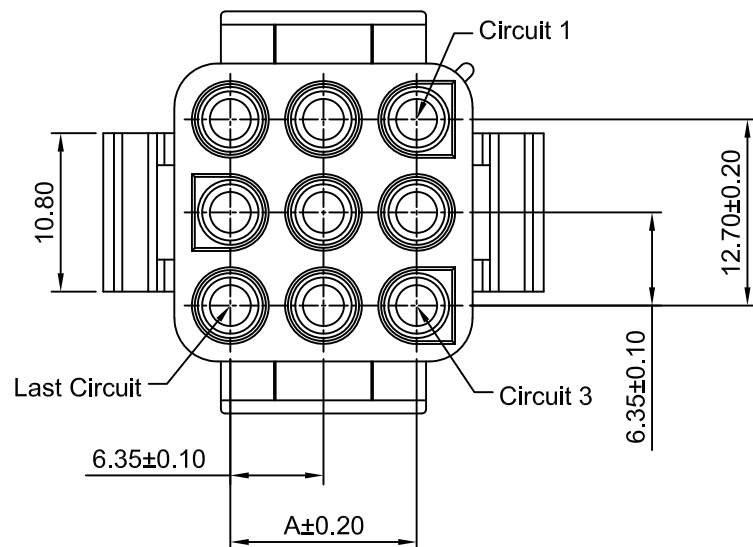

Ordering Information:

C6351HF-3xXP - ** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

BR: Brown

RD: Red

OR: Orange

YL: Yellow

GN: Green

BL: Blue

GY: Gray

BK: Black

SPECIFICATIONS:

Current Rating: 13.5A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351HF-3x2P	6.35	13.97
C6351HF-3x3P	12.70	20.32
C6351HF-3x4P	19.05	26.67
C6351HF-3x5P	25.40	33.02

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	6.35mm PITCH TRIPLE ROW HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A2
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°				
		C6351HF-3xXP		

A2	CHANGE THE DRAWING	2021.03.22
A1	CHANGE THE DRAWING	2020.08.31
A0	NEW RELEASE	2015.04.25
REV	DESCRIPTION	DATE