


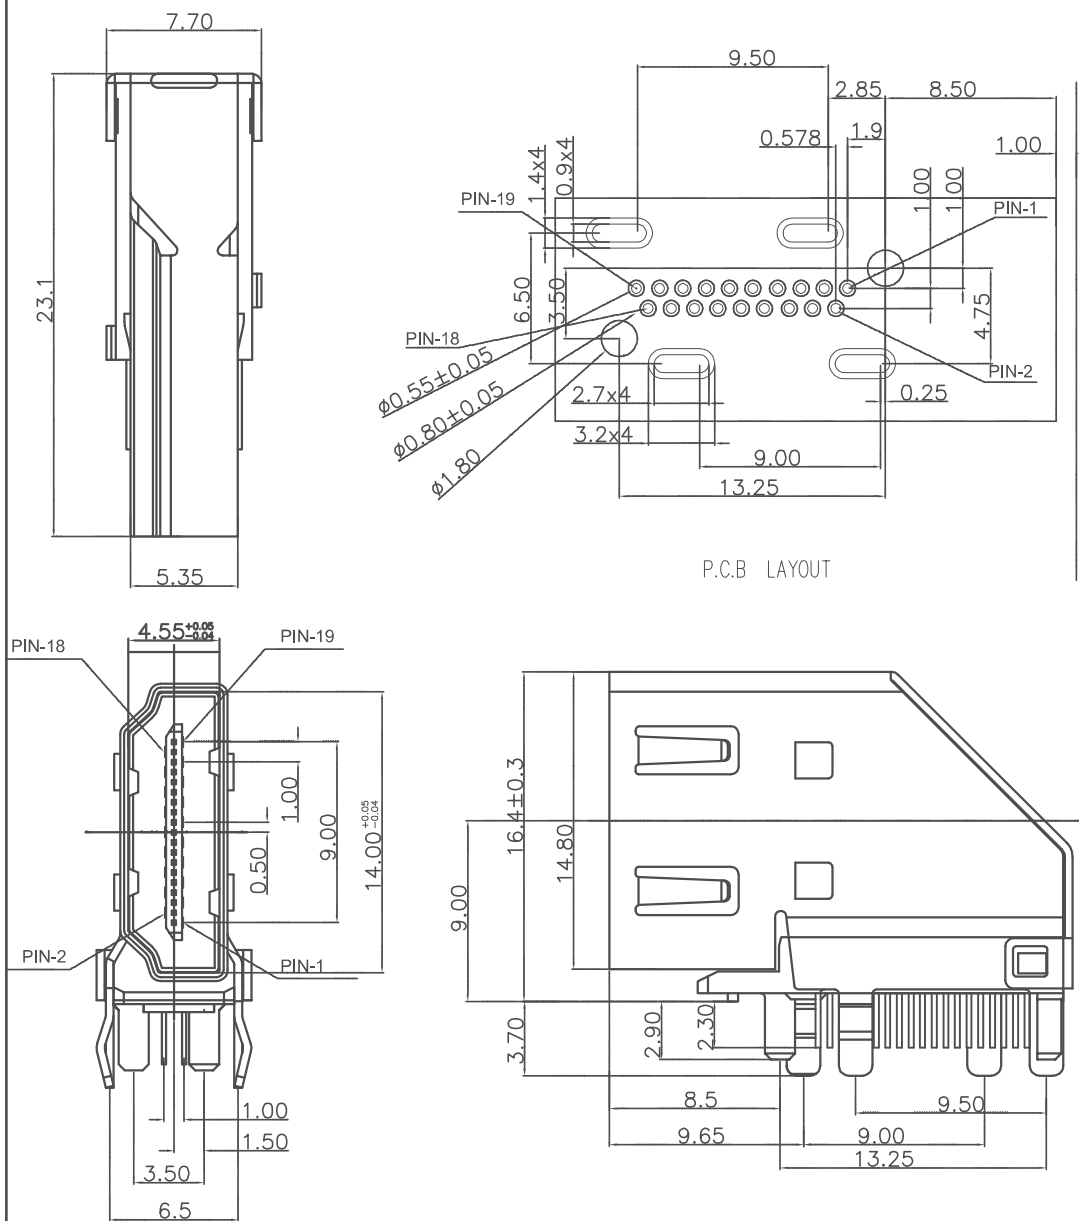

NOTES:


1.) MATERIAL:

- 1-1. HOUSING:LCP,UL 94V-0,COLOR:BLACK;
- 1-2. CONTACT:C2680R-EH T=0.20;
- 1-3. SHELL:C2680 T=0.50;

- 2-1. CONTACT: Au PLATING ON CONTACT AREA,(SEE P/N DESCRIBING) MATTE PURE Au 1u" Min. PLATING ON SOLDER TAILS,50u" MIN. Ni UNDERPLATING OVERALL;
- 2-2. SHELL: PLATING Ni

3.) SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 40V
- 3-2. CURRENT RATING: 0.5A
- 3-3. INSULATION RESISTANCE: 100MΩ MIN
- 3-4. CONTACT RESISTANCE: 30mΩ MAX
- 3-5. OPERATION TEMPERATURE: -20° TO +85°
- 3-6. INSERT FORCE:4.0kgf MAX
- 3-7. EXTRACT FORCE:1.0kgf~4.0kgf
- 3-8. DURABILITY: 10000 CYCLES

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位 (UNIT): MM
品名 (ITEM NO)		本 (REV)		比例 (SCALE) 1:1
料号 (PART NO)		日期 (DATE)		 未注公差 TOLERANCE UNSPECIFIED X.X ±0.38 X.XX ±0.15 X.XXX ±0.10 X' ±5° X.X' ±2°
模号 (MODEL NO)		设计 (DESIGN)		
		审核 (CHECKED)		
		核准 (APPROVED)		