

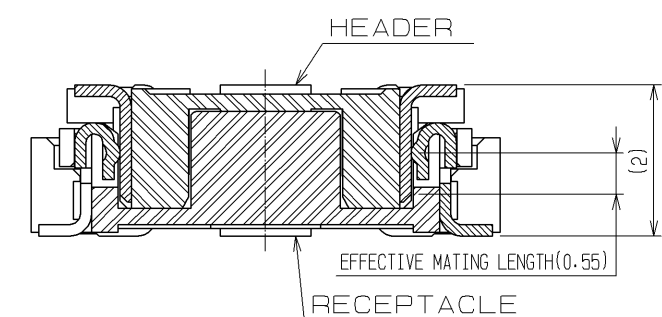





RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

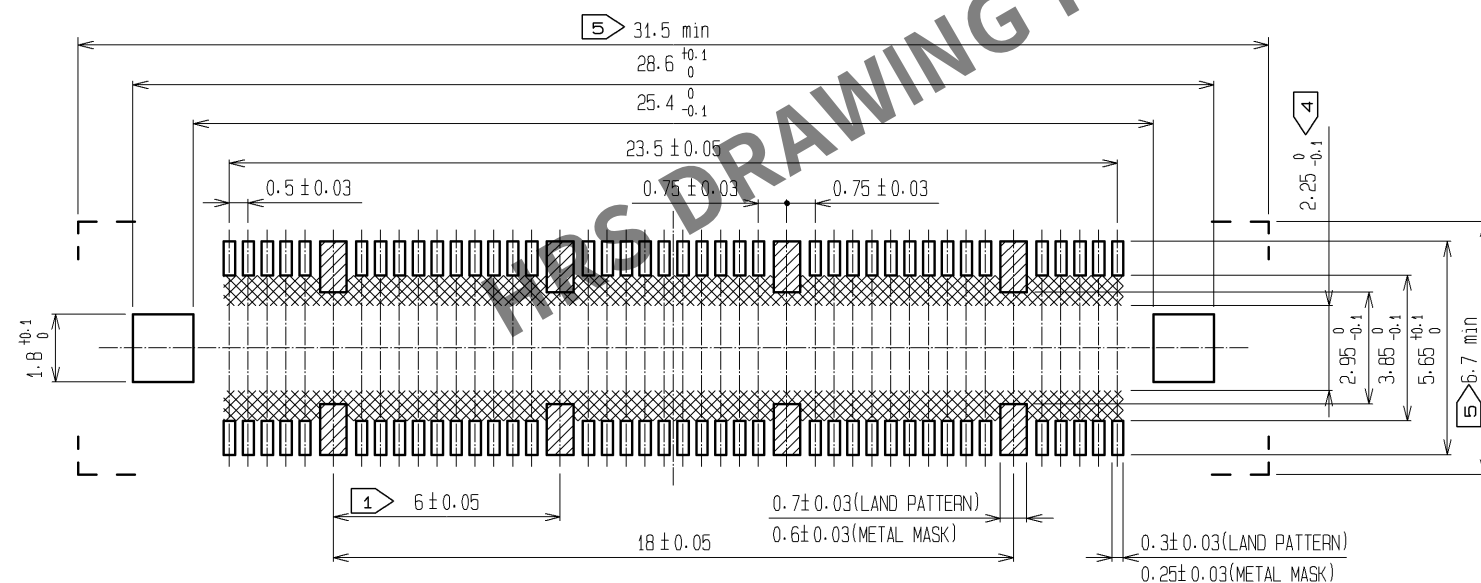

- NOTES
- 1 8 HATCHED  PARTS: GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO  AREA ,OR MATING PAIR CANNOT BE MATED.
 - 6 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3. 4	PHOSPHOR BRONZE	TIN PLATING				
2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.				
		LEAD AREA : GOLD 0.05μm min.	7	POLYIMIDE	(TAPE FOR VACUUM PICKUP)	
		UNDER PLATING : NICKEL 1μm min.	6	PET	TOP COVER TAPE	
1	LCP	BEIGE UL94V-0	5	PS	EMBOSSED CARRIER TAPE	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS	


UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		5 : 1						

HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA	09. 06. 30	DRAWING NO.	EDC3-152097-22	
	CHECED : HT. YAMAGUCHI	09. 06. 30	PART NO.	FX11LB-80P/8-SV(92)	
	DESIGNED : YN. TAKANO	09. 06. 30	CODE NO.	CL573-0013-3-92	
	DRAWN : HK. SUNADORI	09. 06. 29			


1/2

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


DRAWING FOR PACKING(2:1)

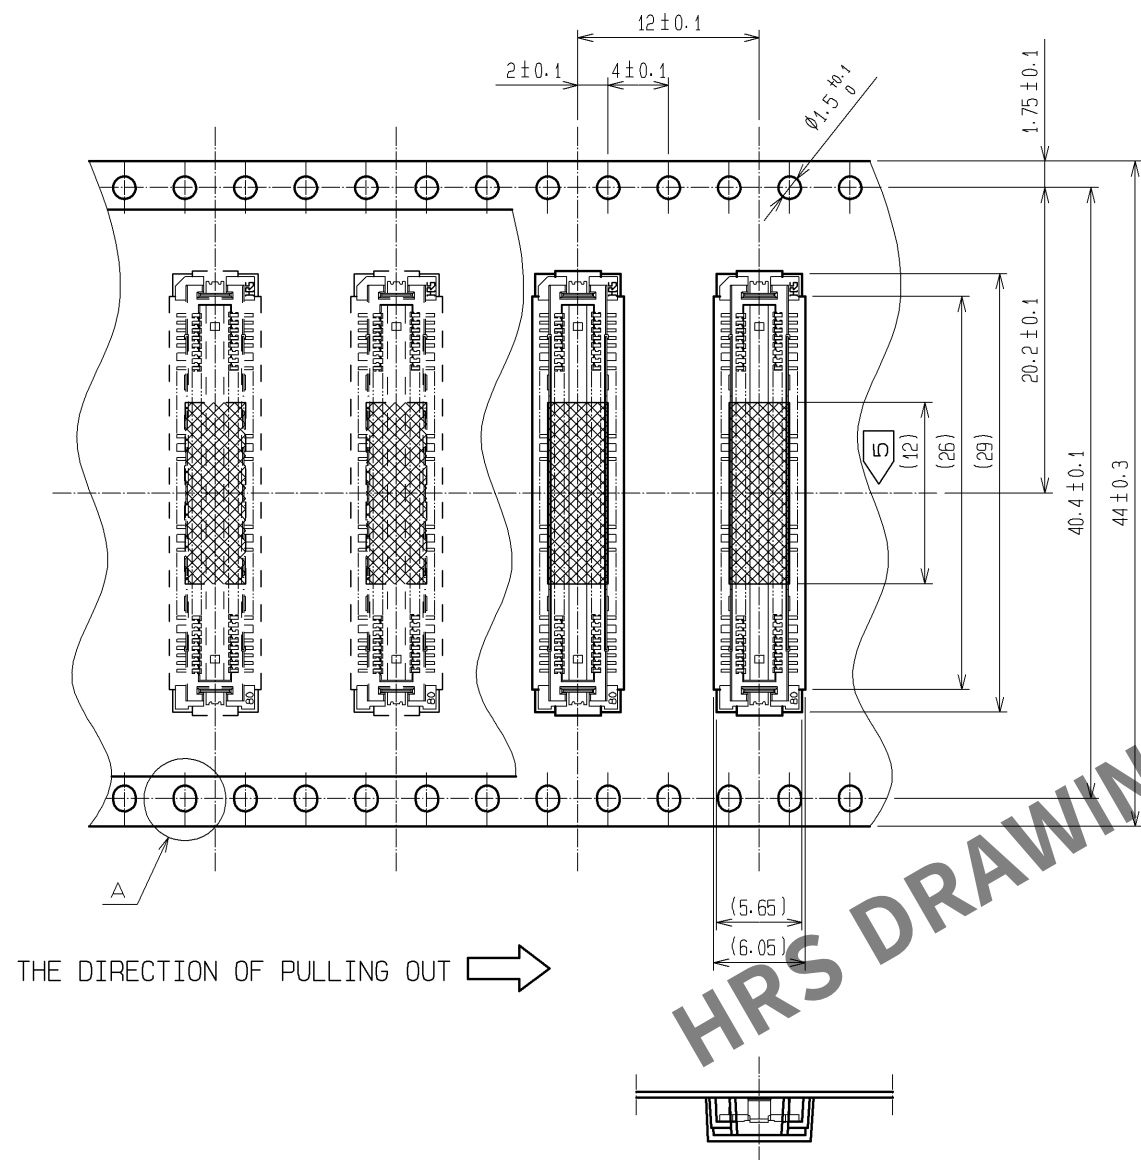

A (5:1)




DETAIL FOR VACUUM PICKUP (5:1)

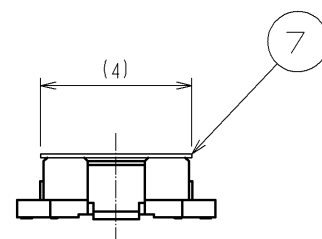

- NOTES
- 1 REEL: 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 5 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

REELED DIMENSION(Free)

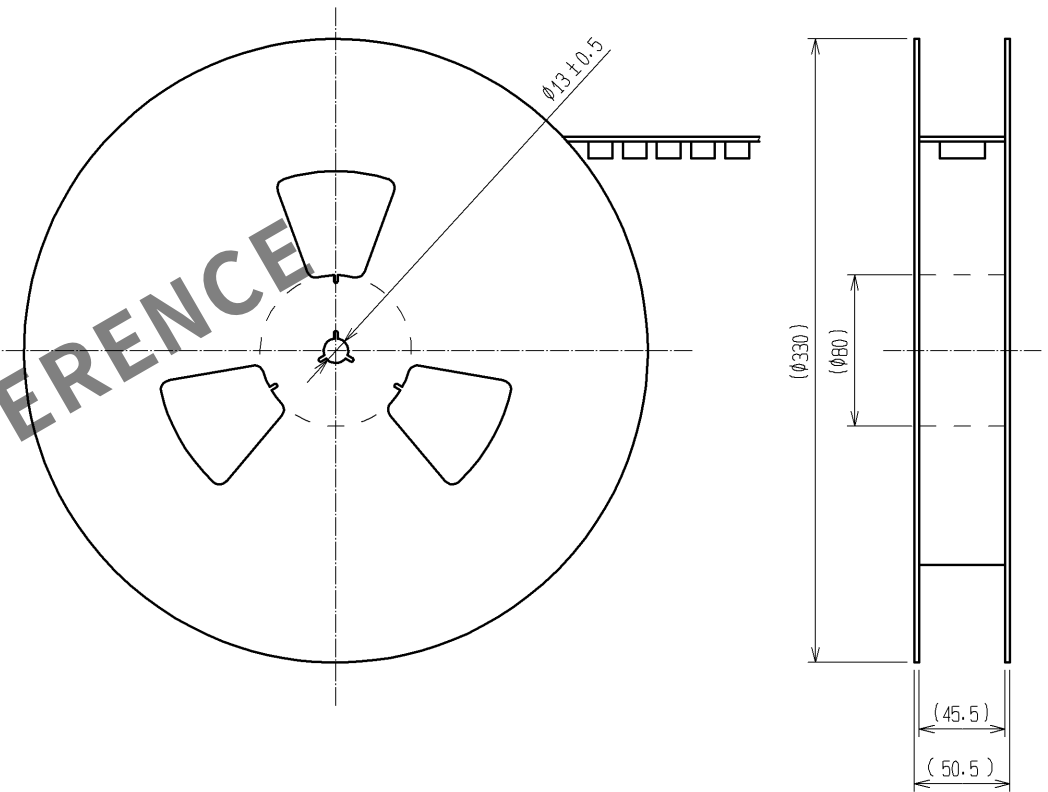

HRS

DRAWING NO.	EDC3-152097-22
PART NO.	FX11LB-80P/8-SV(92)
CODE NO.	CL573-0013-3-92

2/2