

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492

<https://www.phoenixcontact.com/us/products/1439492>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, black RAL 9005, free cable end, on Valve connector A, with 1 LED, Wiring: Z diode, cable length: 10 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Convenient: increased machine availability thanks to quick and easy diagnostics

Commercial data

Item number	1439492
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF07
Product key	BF1DAA
Catalog page	Page 229 (C-2-2019)
GTIN	4046356489379
Weight per piece (including packing)	389 g
Weight per piece (excluding packing)	362.6 g
Customs tariff number	85444290
Country of origin	PL

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492

<https://www.phoenixcontact.com/us/products/1439492>

Technical data

Product properties

Product type	Sensor/actuator cable with valve connector
Application	Standard
Number of positions	3
No. of cable outlets	1
Shielded	no

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	TPU
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	24 V AC
	24 V DC
Nominal current I_N	4 A

Valve connector characteristics

Fixing screws	M3 x 29
Pulse power	40 W (at 100 μ s square-wave pulse)
Terminal voltage	70 V (at 2 mA constant current)
Reverse voltage	50 V

Signaling

Status display	1 LED
Status display present	Yes

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

Type	Valve connector A
Number of positions	3
	CuSn (Contact)

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492


<https://www.phoenixcontact.com/us/products/1439492>

Material	Sn (Contact surface)
	PA 6.6 (Contact carriers)
	TPU (Housing)

Cable/line

Cable length	10 m
--------------	------

PVC black [PVC]

Dimensional drawing	
Cable weight	38.6 kg/km
UL AWM Style	2464
Number of positions	3
Shielded	no
Cable type	PVC black [PVC]
Conductor structure signal line	16x 0.20 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm²
Wire diameter incl. insulation	1.5 mm ±0.05 mm
External cable diameter	4.80 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	≥ 20 MΩ*km
Nominal voltage, cable	300 V
Test voltage	1200 V
Minimum bending radius, fixed installation	5 x D
Smallest bending radius, fixed installation	24 mm
Flame resistance	DIN VDE 0482
	DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492

<https://www.phoenixcontact.com/us/products/1439492>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)

Standards and regulations

Valve connector

Standard designation	Valve connector
Standards/specifications	EN 175301-803

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable




1439492

<https://www.phoenixcontact.com/us/products/1439492>

Drawings

Dimensional drawing

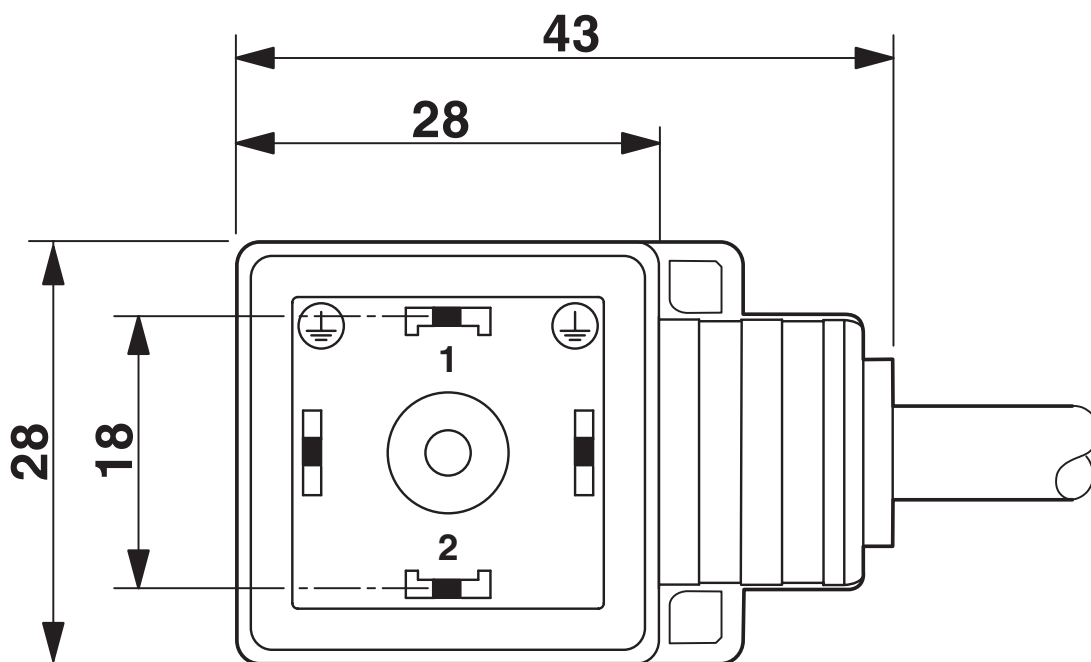

Valve connector, type A

Dimensional drawing




Valve connector, type A, side view


SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable

1439492

<https://www.phoenixcontact.com/us/products/1439492>

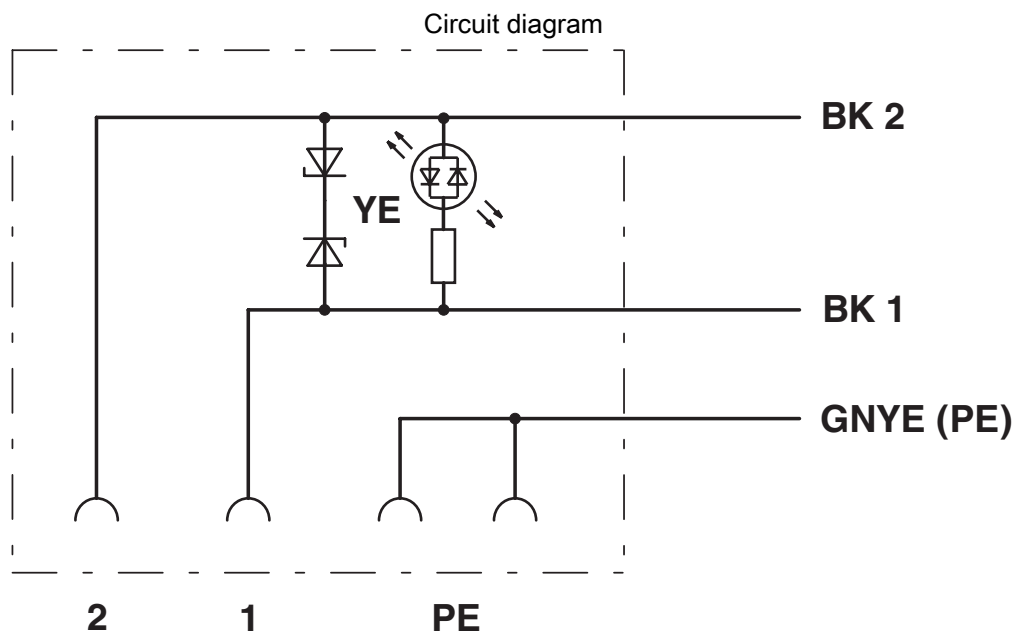

Schematic diagram

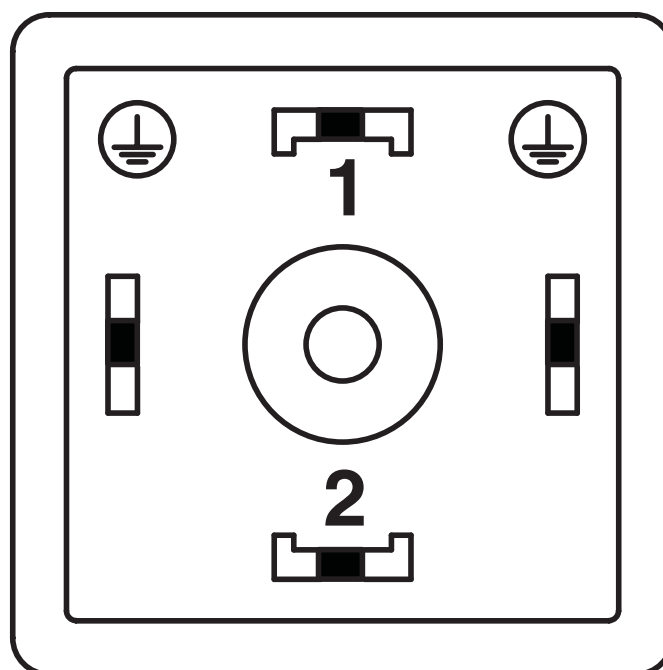

Valve connector pin assignment, type A

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492

<https://www.phoenixcontact.com/us/products/1439492>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1439492>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	4 A	-	-

 EAC-RoHS Approval ID: RU D-DE.HB35.B.00387				
--	--	--	--	--

 CSAus Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	24 V	4 A	-	-

cCSAus				
---------------	--	--	--	--

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492

<https://www.phoenixcontact.com/us/products/1439492>

Classifications

ECLASS

ECLASS-11.0	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable



1439492

<https://www.phoenixcontact.com/us/products/1439492>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(c)-I

China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

SAC-3P-10,0-PVC/A-1L-Z - Sensor/actuator cable

1439492

<https://www.phoenixcontact.com/us/products/1439492>



Accessories

SAC-V-SCREW-M3-29 KNURL - Screw

1403779

<https://www.phoenixcontact.com/us/products/1403779>

Fillister head screw with plastic knurl, M3 x 40



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com