


MATERIALS AND FINISHES:

BODY: BERYLLIUM COPPER
PLATED: GOLD (30μ-in MIN) OVER
NICKEL (100μ-in MIN)


CONTACT: BERYLLIUM COPPER
PLATED: GOLD (50μ-in MIN) OVER
NICKEL (100μ-in MIN)

CLIP RING, CAP: BRASS
PLATED: GOLD (30μ-in MIN) OVER
NICKEL (100μ-in MIN)




INSULATOR: PTFE

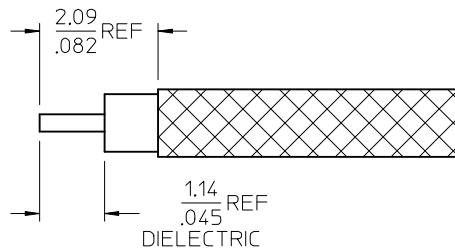

RECOMMENDED STRIP DIMENSIONS
FOR NON JACKETED CABLES
SR .047

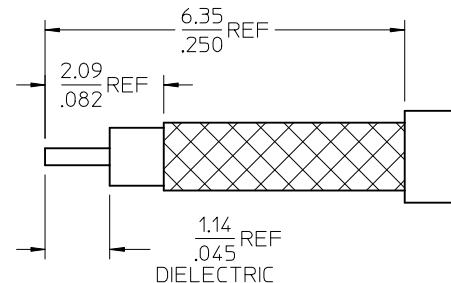

RECOMMENDED STRIP DIMENSIONS
FOR JACKETED CABLES

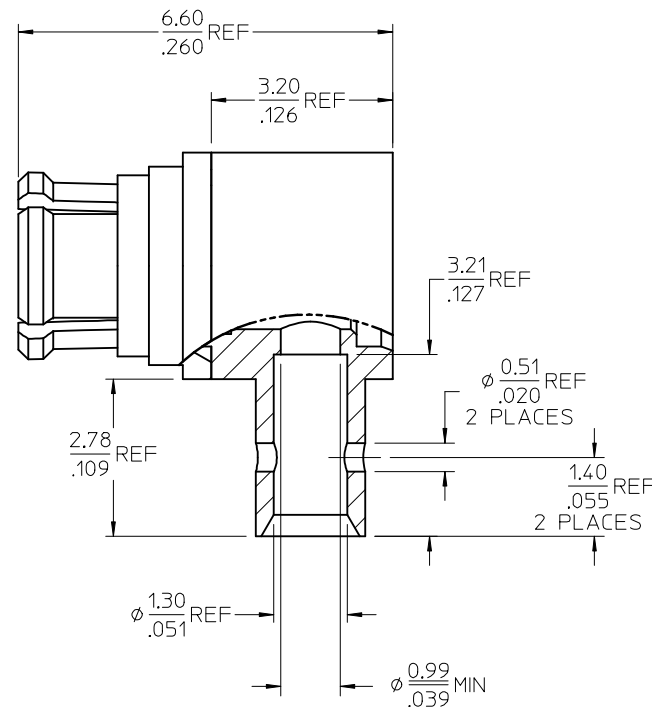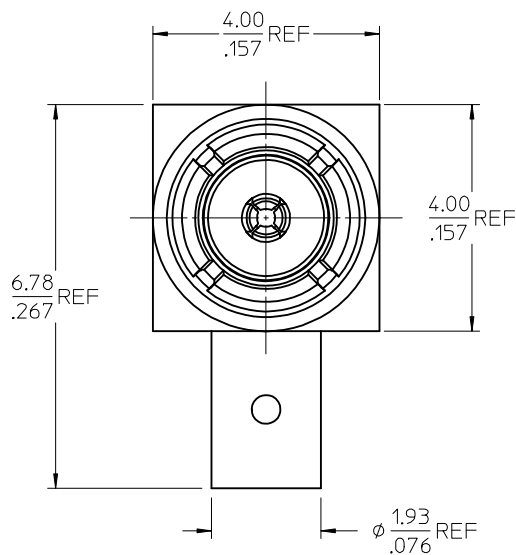

CAP

VSWR 1.50 MAX DC - 26.5 GHz

73415-5122	SMALL TRAT (20 CAV.)
73415-5121	ONE PER BAG
73415-5120	STANDARD TRAY (80 CAV.)
PART NO.	DESCRIPTION

MIL-STD-348B, FIG. 326.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: UPDATED VIEWS
TO REFLECT ADDED
FEATURE TO
CONTACT

EC NO: URF2016-0474
2015/12/25
DRWN:BSHAH
CHKD:SSS
2015/12/25
APPR:AROBERTSON
2016/01/04

QUALITY
SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .005	± .0005
1 PLACE	± .005	± .0005
0 PLACE	± .005	± .0005

ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
SSS	2004/09/23
CHECKED BY	DATE
TEF	2004/09/23
APPROVED BY	DATE
GMH	2004/09/23

MATERIAL NO.
SEE TABLE

SCALE
INCH

DESIGN UNITS
INCH

THIRD ANGLE
PROJECTION

TITLE
SMP JACK RA
FOR 047 SIZE CABLES
SMP-JC, EWR-2582

DOCUMENT NO.
SD-73415-512

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION