
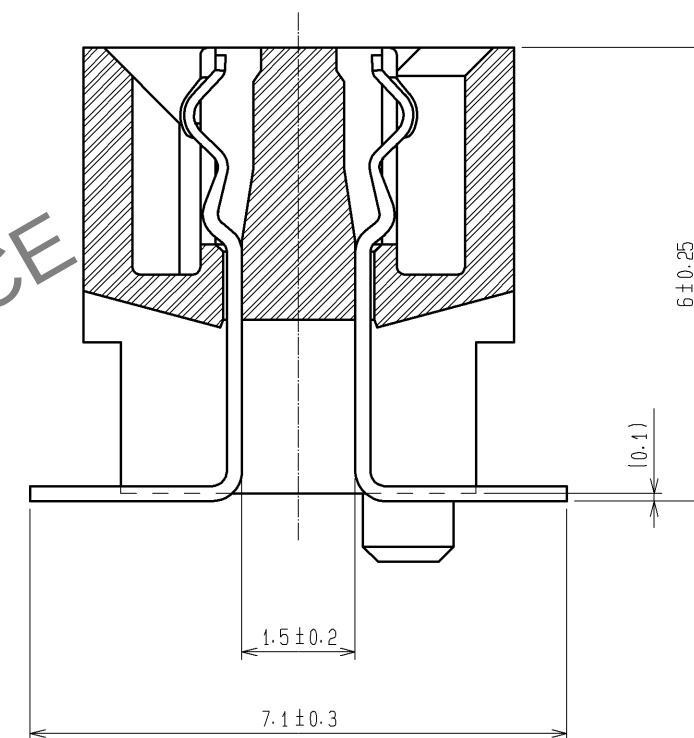


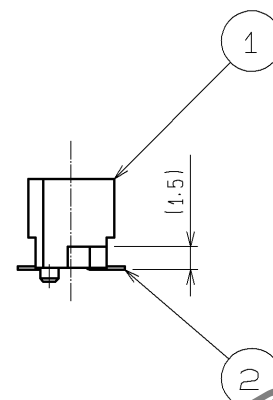

NOTE  HRS MARK SHALL BE OPTIONAL.

2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

3 TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.

4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.

SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.

5 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.

THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.



1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.				
					LEAD AREA:TIN 1μm min.				
					UNDER PLATING:NICKEL 2μm min.				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	07. 04. 18		DRAWING NO.		EDC3-084986-21		
		CHECED : HS. OZAWA	07. 04. 17		PART NO.		FX6-100S-0. 8SV2 (91)		
		DESIGNED : KT. DOI	07. 04. 17		CODE NO.		CL576-0128-4-91		
		DRAWN : TS. MIYAKI	07. 04. 10						

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

