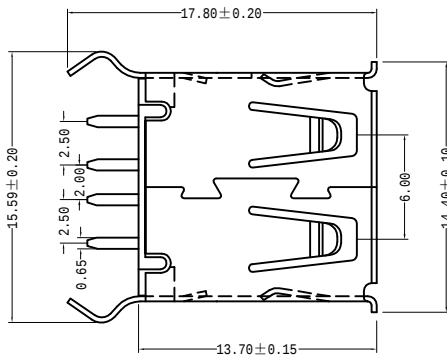

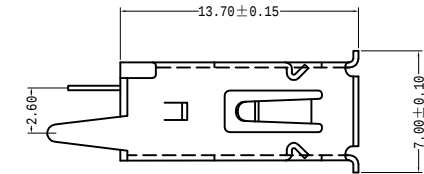


PCB LAYOUT

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
- 5.绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retenion
1.2kgf(MIN)

原材料:Matorial:

- 1.塑胶:Housing:
Hing Temperature Tnermaplastics,
PBT White/Black
- 2.端子:Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2.外壳:Shell:
Nickel Plating



深圳市万骏达电子有限公司

<http://www.wanjunda.com>

品名 (ITEM NO)

AF 180 度 13.7 弯脚 卷边

料号 (PART NO)

USB2.0-AF-ZCS-JB-13.7

模号 (MODEL NO)

图号 (DWG NO)

版本 (REV)

日期 (DATE)


设计 (DESIGN)

审核 (CHECKED)

核准 (APPROVED)

单位 (UNIT): MM

比例 (SCALE) 1:1

未注公差
TOLERANCE UNSPECIFIED

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
X°	±5°
X.X°	±2°