

Actuator

704.095.010I

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/704.095.010I>

Your product:



704.095.010I Actuator

Loading . . .

FRONT

Front form:	round
Front bezel material:	Aluminium
Front dimension:	Ø 35 mm
Front bezel colour:	Black

MOUNTING

Design:	flush
Mounting type:	Panel mounting
Mounting cut-out:	Ø 30.5 mm

OPERATING-/INDICATION PART

Lever colour:	Black
Lever material:	plastic
Lever shape:	long

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

MECHANICAL CHARACTERISTIC

Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching angle:	42° left / 42° right
Weight:	0.056 kg

Switching action: Momentary - Rest - Momentary

Switching positions: 3 positions

AMBIENT CONDITION

IP Protection: IP65 front side

Operating temperature: – 40 °C ... + 55 °C

Storage temperature: – 40 °C ... + 85 °C

CERTIFICATE

RoHS: RoHS compliant

REACH: REACH compliant


OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 35 mm, optional illuminative, Black, long, round, Black, Aluminium, anodised, Momentary - Rest - Momentary

max. number of switching elements: 3

Hints: Max. 3 switching elements can be clipped on

Wiring diagrams:

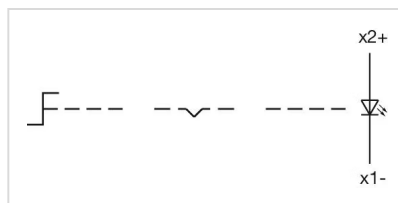

Mounting cut-outs:

mm

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8

Dimension drawings:

A = Screw terminal

Switching positions: