
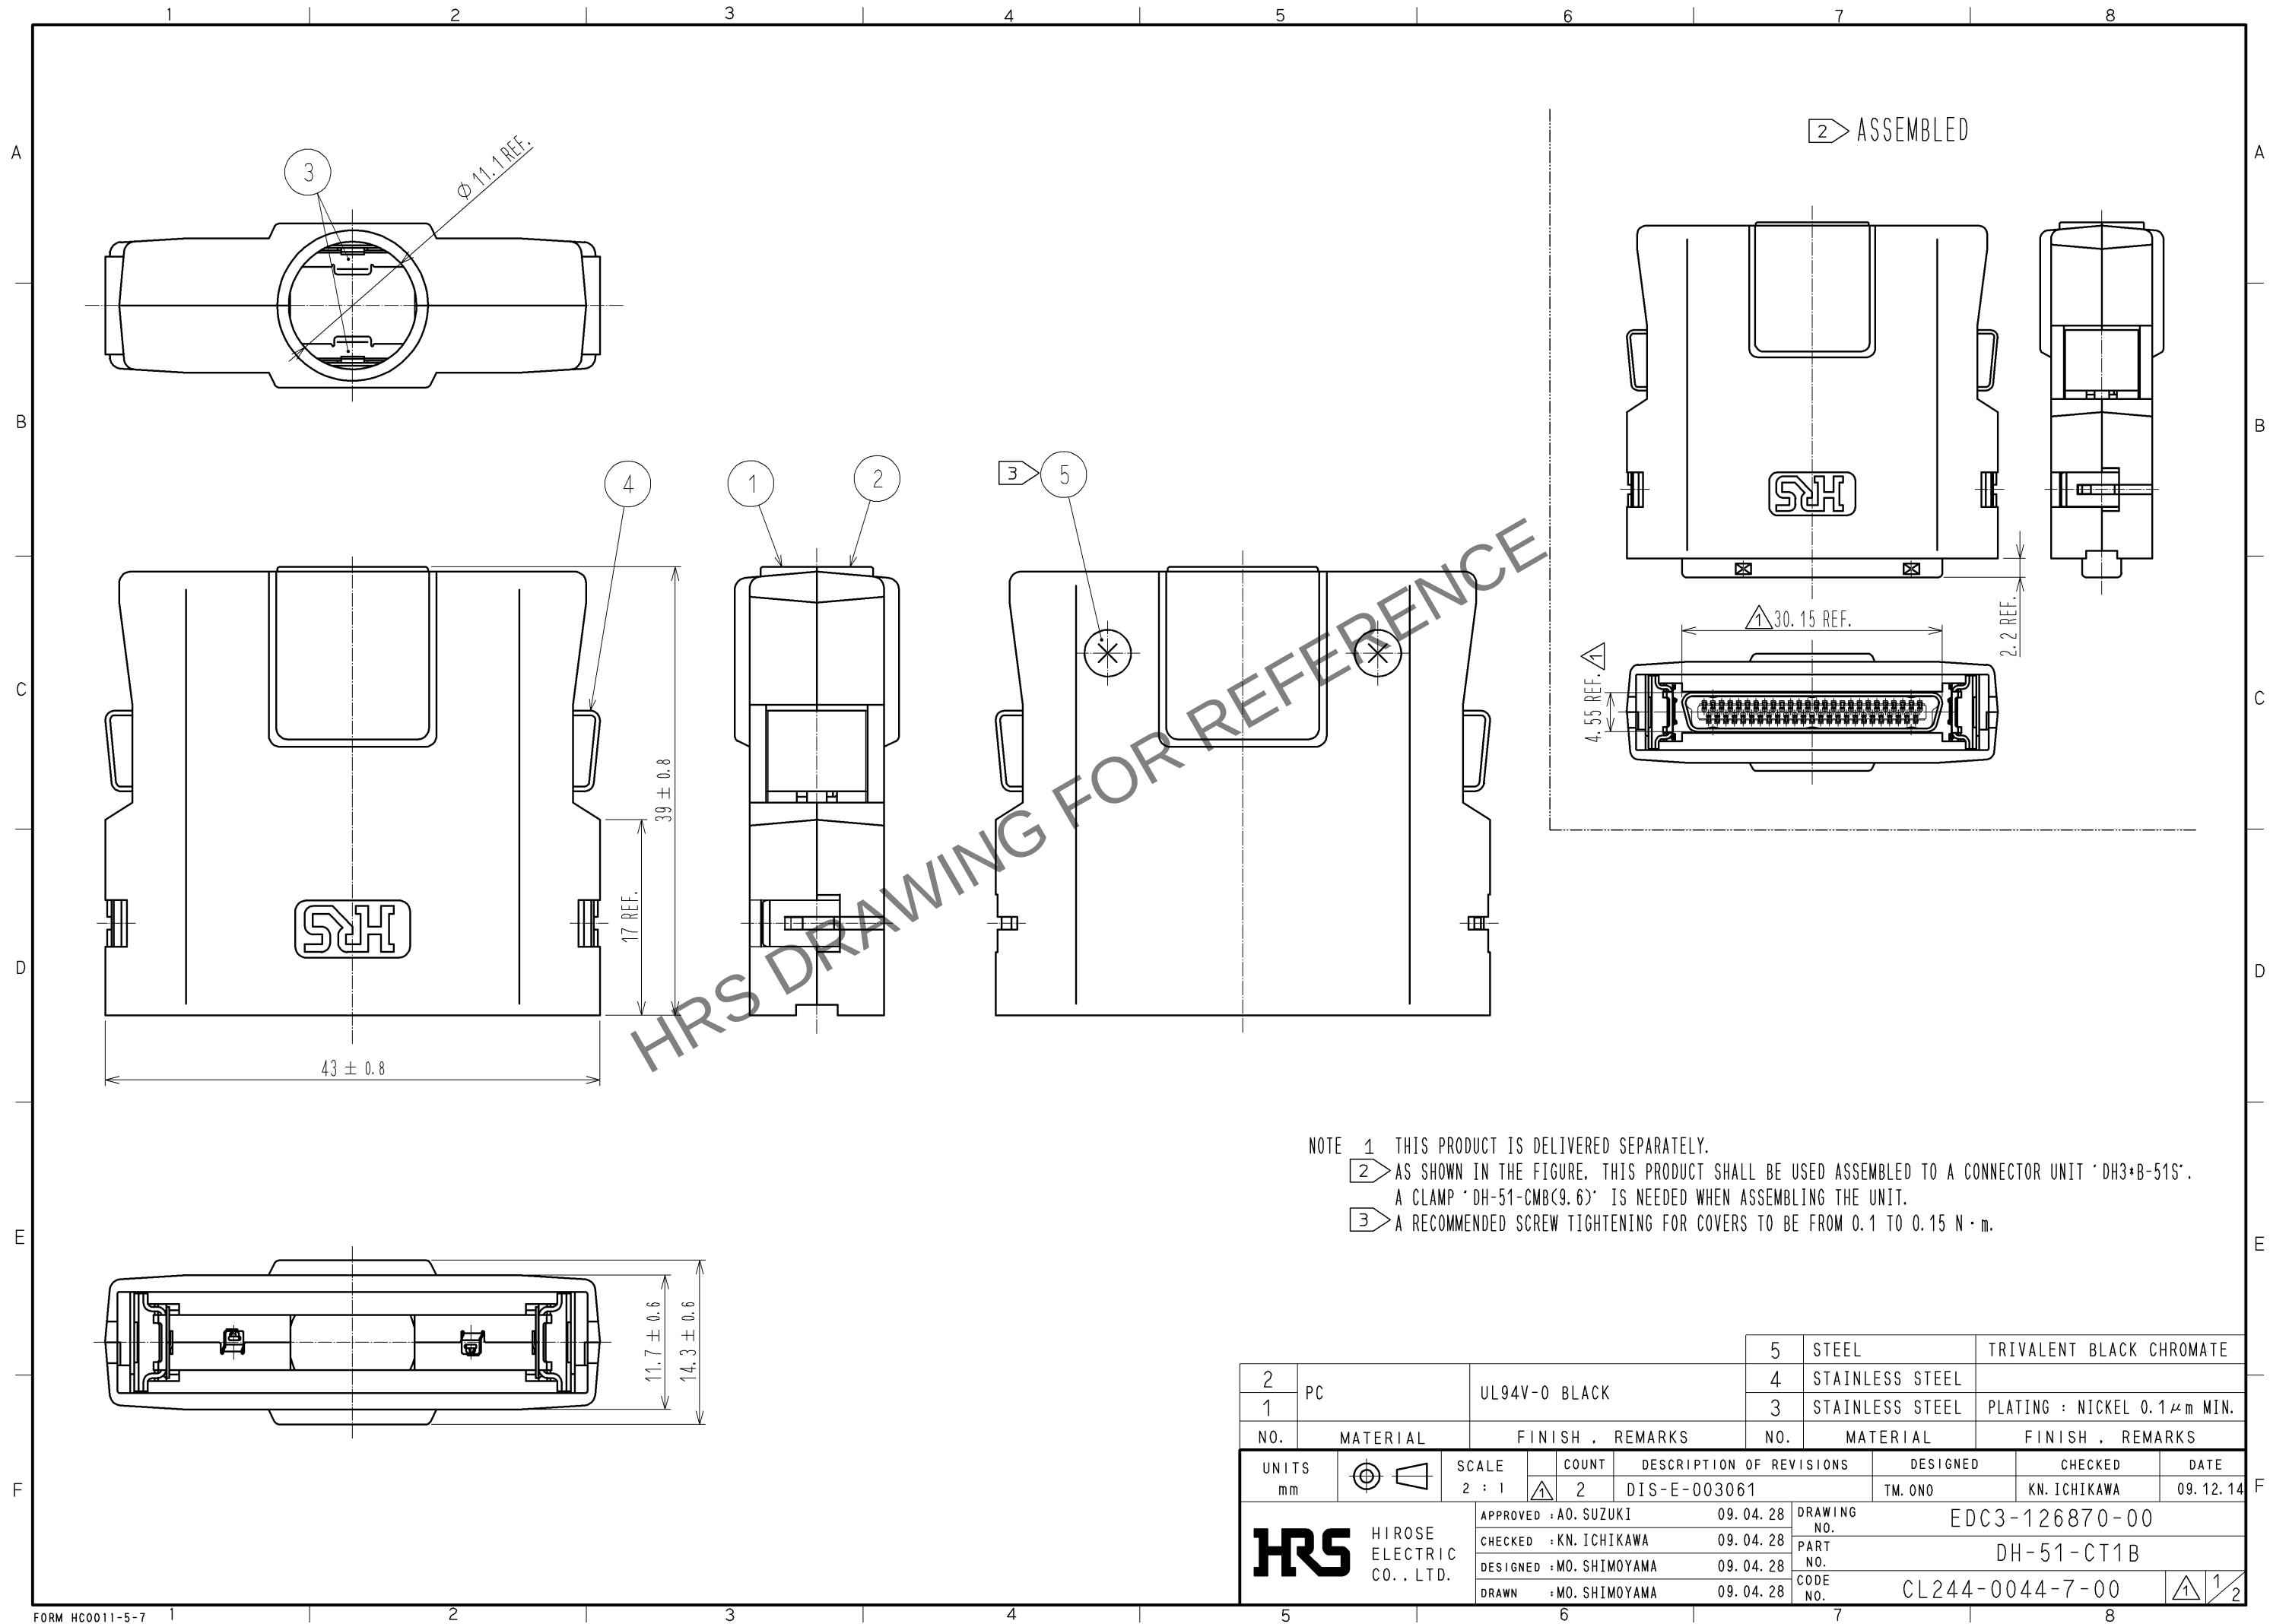



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3*B-51S'.
A CLAMP 'DH-51-CMB(9.6)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

2		PC	UL94V-0 BLACK	5	STEEL	TRIVALENT BLACK CHROMATE			
1				4	STAINLESS STEEL				
				3	STAINLESS STEEL	PLATING : NICKEL 0.1μm MIN.			
NO.		MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm			SCALE 2 : 1	COUNT  2	DESCRIPTION OF REVISIONS DIS-E-003061		DESIGNED TM. ONO	CHECKED KN. ICHIKAWA	DATE 09.12.14
 HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI		09.04.28		DRAWING NO. EDC3-126870-00			
		CHECKED : KN. ICHIKAWA		09.04.28		PART NO. DH-51-CT1B			
		DESIGNED : MO. SHIMOYAMA		09.04.28		CODE NO. CL244-0044-7-00			
		DRAWN : MO. SHIMOYAMA		09.04.28					
5		6		7		8			
									

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

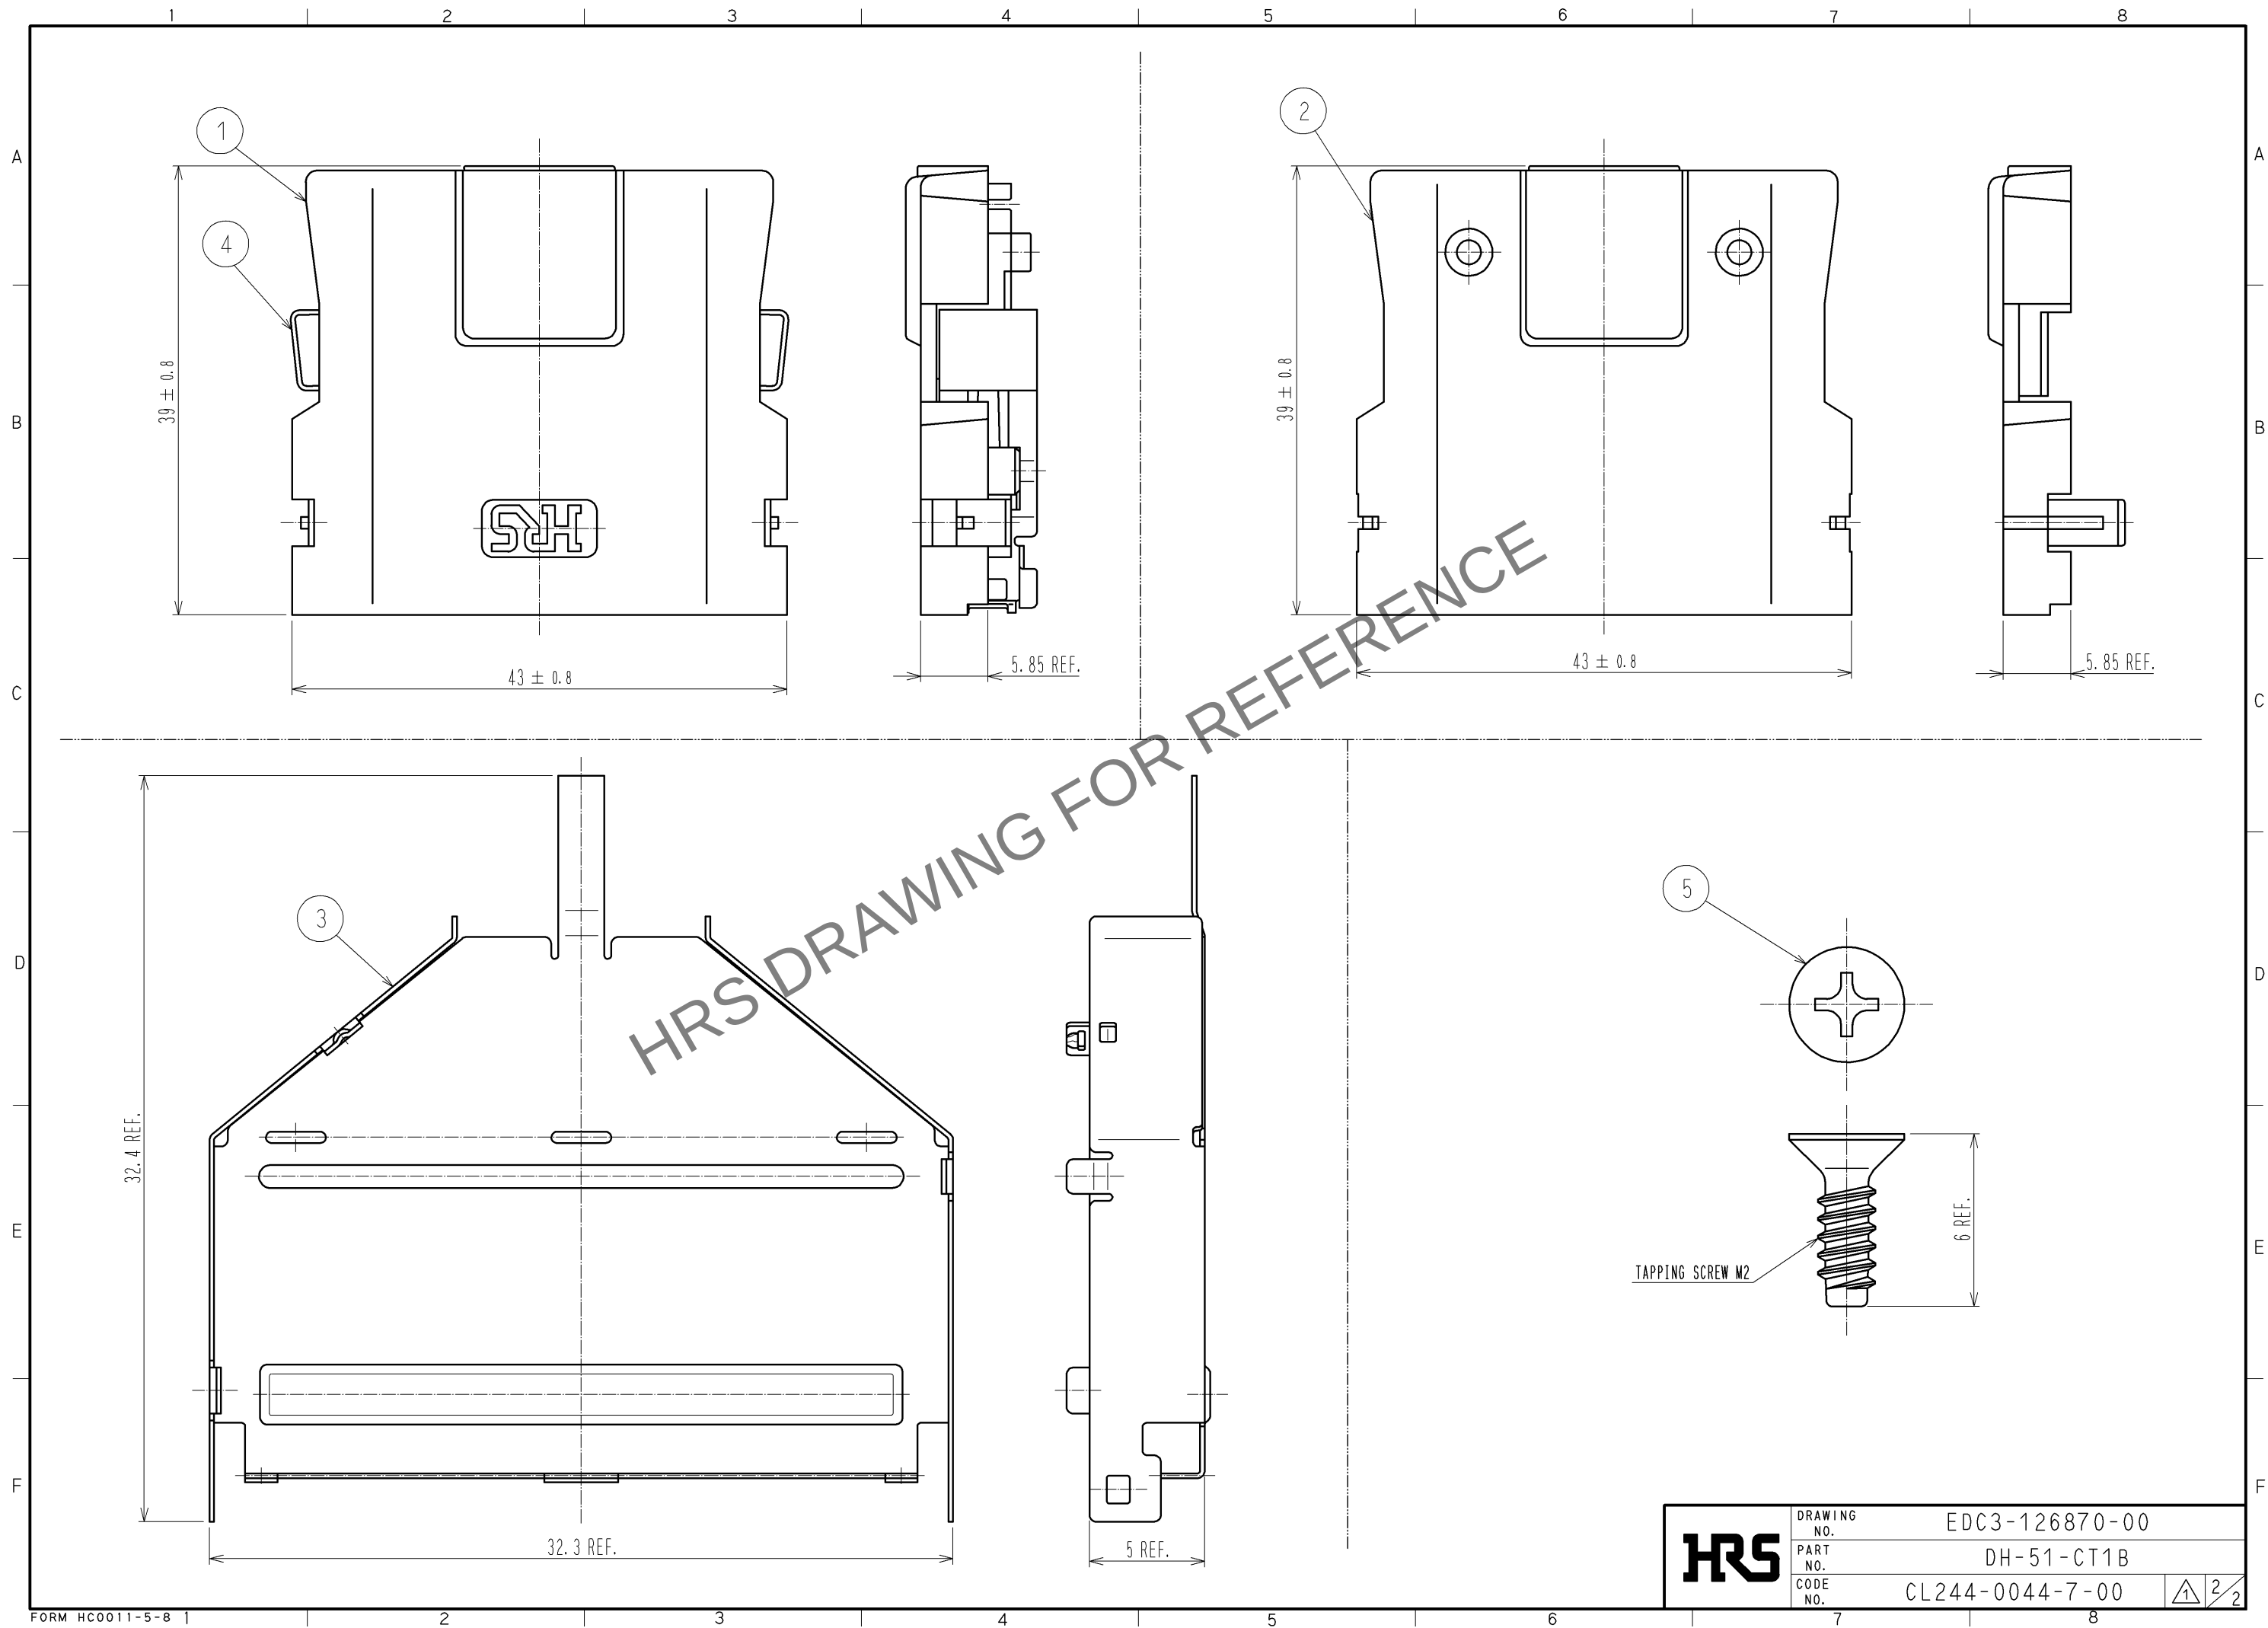

HRS	DRAWING NO.	EDC3-126870-00	
	PART NO.	DH-51-CT1B	
	CODE NO.	CL244-0044-7-00	2 2